

Specification

Part No.	:	GSA.8859.A.105111
Product Name	:	4dBi Adhesive Mini C-V2X 5.9GHz Antenna 1m CFD200 with SMA(M) Connector
Feature	:	5.9GHz C-V2X Adhesive Mount Antenna 5850MHz to 5925MHz High Efficiency and High Peak Gain IP67 Rated for External Use Adhesive Mount on Plastic or Glass 1m Low Loss CFD200 Cable with SMA(M) Connector Dimensions: 36*30*10mm RoHS & REACH Compliant



1. Introduction

The GSA.8859 is an external adhesive mount C-V2X antenna for 5850-5925MHz. The GSA.8859 at only 10mm in height and 30 x 36mm is a very compact size enabling flexibility of integration. It can be mounted on or plastic surfaces easily with the double-sided adhesive. The antenna features peak gain at 4.14 dBi on glass and 3.24 dBi on 2mm plastic.

C-V2X is the communications medium of choice for active safety V2V/V2X (Vehicle-to-Vehicle and Vehicle-to-Other) systems. Primarily allocated for vehicle safety applications, C-V2X supports high-speed, low-latency, short-range, V2V/V2X wireless communications.

For further optimization to customer-specific device environments and for support to integrate and test this antennas performance in your device, contact your regional Taoglas Customer Services Team.


2. Specification

C-V2X		
Frequency	5850~5925MHz	
Efficiency (%)		
In free space	0.3m	80.23
	1m	68.30
	2m	54.24
	3m	44.09
	5m	28.26
On glass	0.3m	72.05
	1m	61.33
	2m	48.71
	3m	39.59
	5m	25.38
On the 2mm ABS	0.3m	78.34
	1m	66.67
	2m	52.96
	3m	43.05
	5m	27.60
Average Gain (dBi)		
In free space	0.3m	-0.96
	1m	-1.66
	2m	-2.66
	3m	-3.56
	5m	-5.49
On glass	0.3m	-1.42
	1m	-2.12
	2m	-3.12
	3m	-4.02
	5m	-5.96
On the 2mm ABS	0.3m	-1.06
	1m	-1.76
	2m	-2.76
	3m	-3.66
	5m	-5.59


Peak Gain (dBi)		
In free space	0.3m	3.27
	1m	2.57
	2m	1.57
	3m	0.67
	5m	-1.30
On glass	0.3m	4.84
	1m	4.14
	2m	3.14
	3m	2.24
	5m	0.34
On the 2mm ABS	0.3m	3.94
	1m	3.24
	2m	2.24
	3m	1.34
	5m	-0.66
Return loss	<-10	
VSWR	<2	
Impedance	50	
Polarization	Linear	
Radiation Pattern	Omnidirectional	
Input Power	5W	
MECHANICAL		
Dimensions	36*30*10mm	
Casing	PP	
Connector	SMA(M) ST, fully customizable	
Cable	1M CFD200, fully customizable	
Waterproof	IP67	
Weight	42g	
ENVIRONMENTAL		
Temperature Range	-40°C to 85°C	
Humidity	Non-condensino 65°C 95% RH	

3. Antenna Characteristics


3.1 Antenna Test Setup

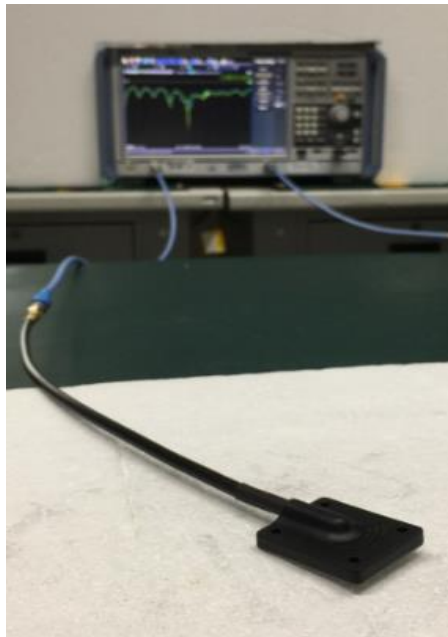

Free Space

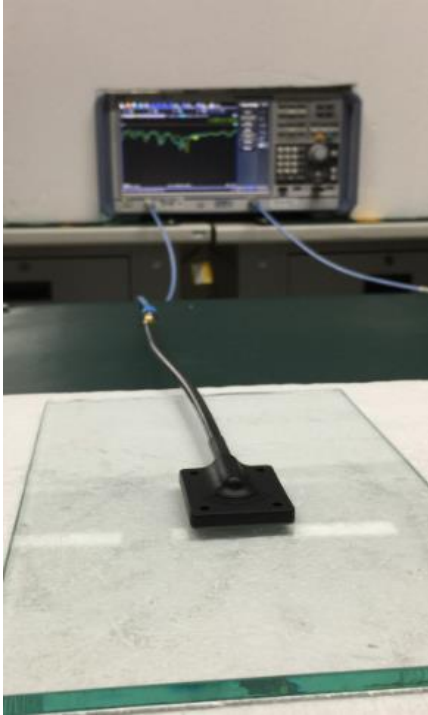


On Glass

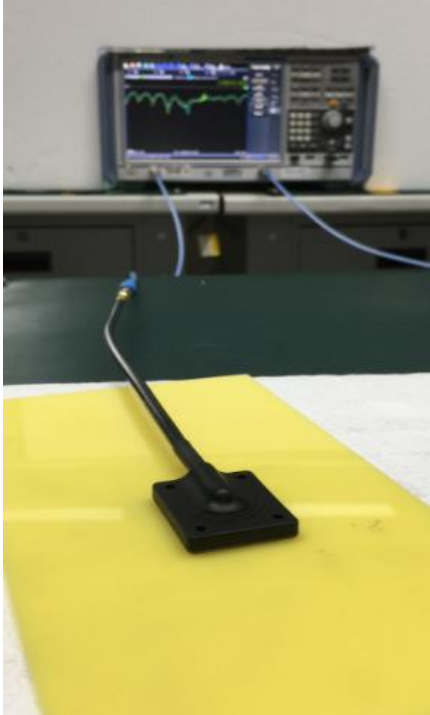


On 2mm ABS


3.2 Return Loss

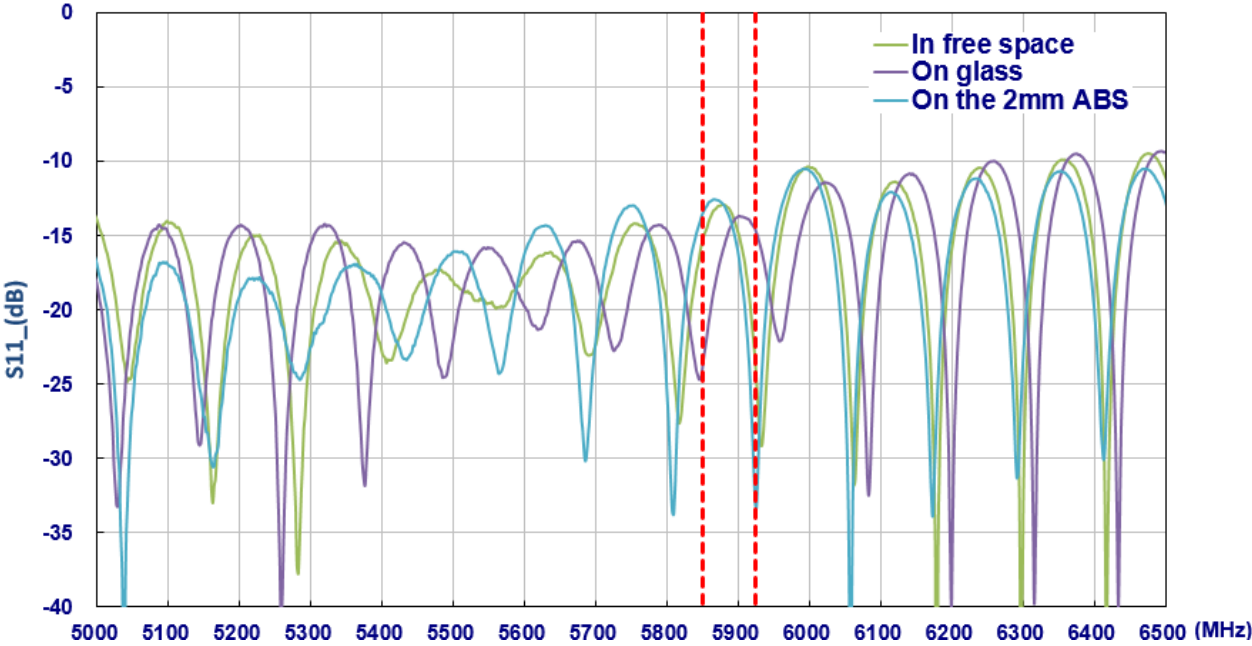


3.3 Efficiency

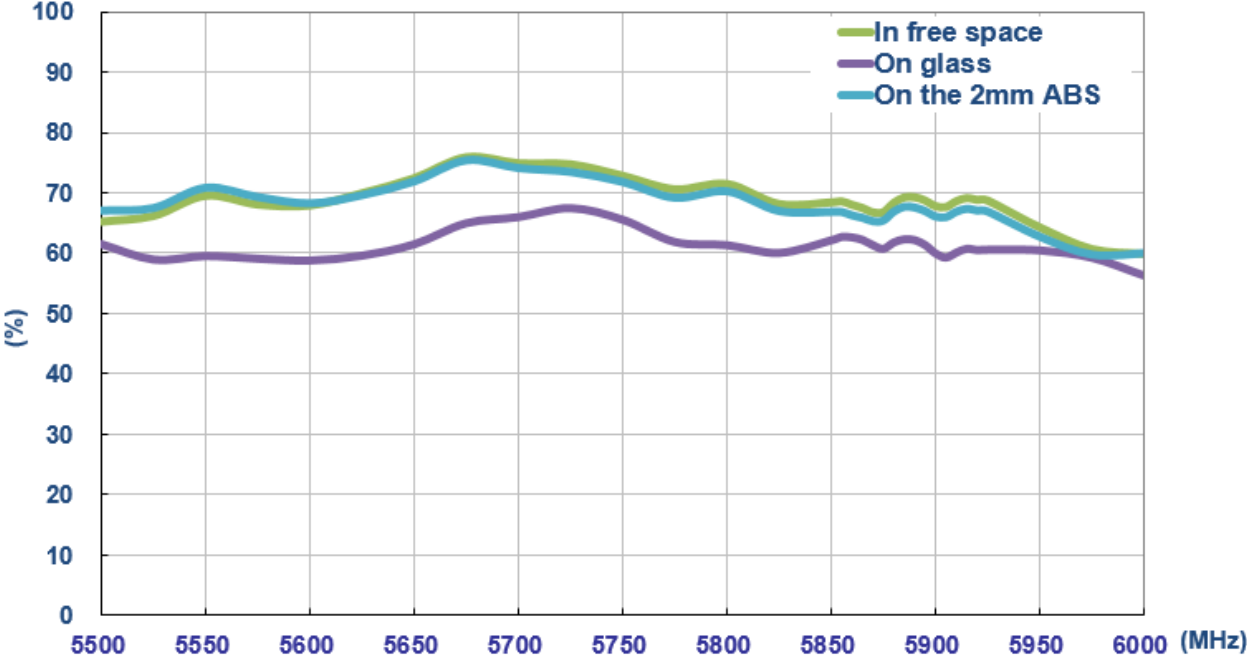

3.4 Peak Gain

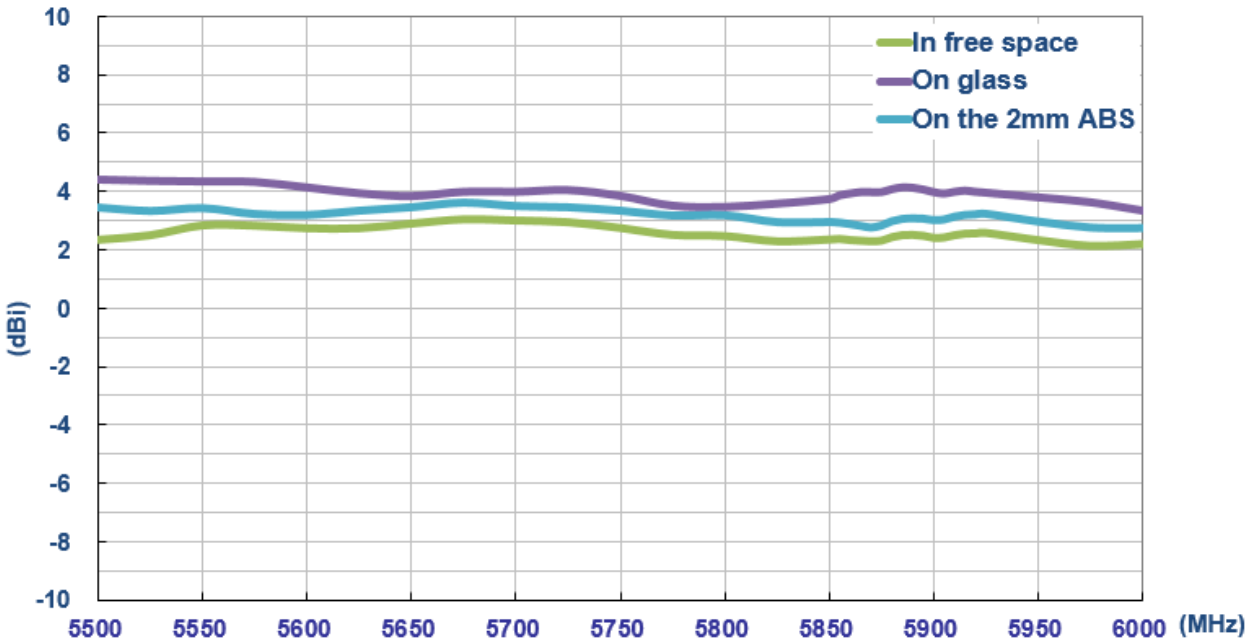


3.5 Average Gain

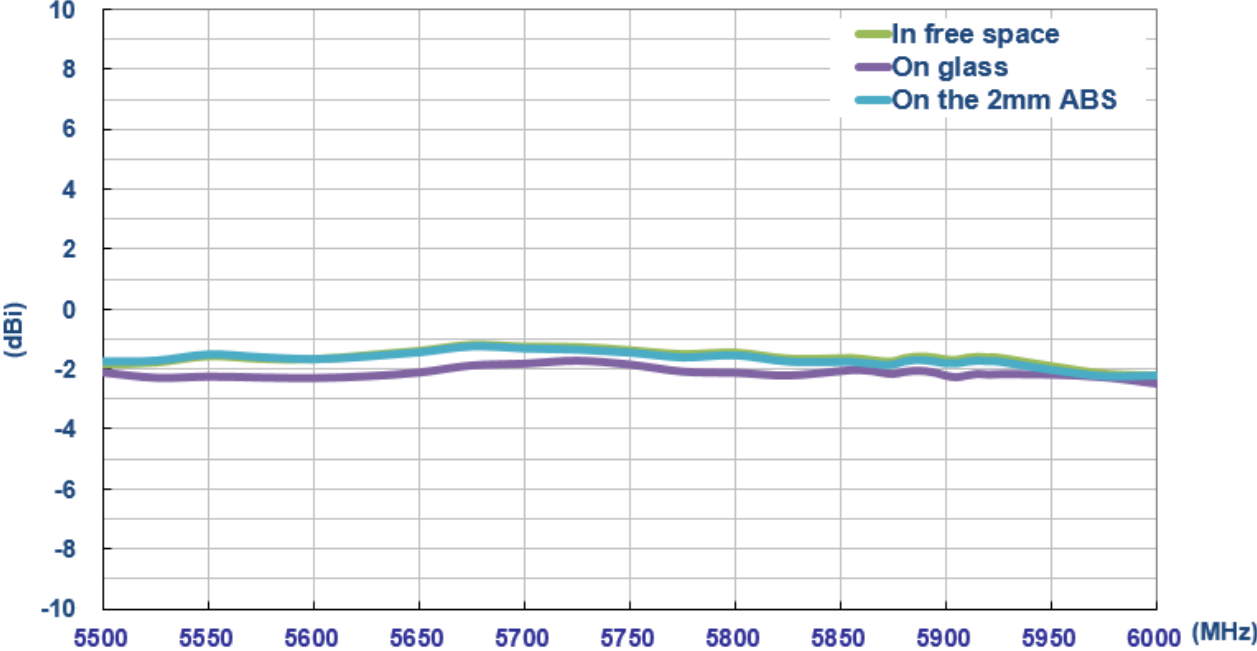


4. Antenna Radiation Patterns


4.1 Antenna setup (Free space with 1m cable)

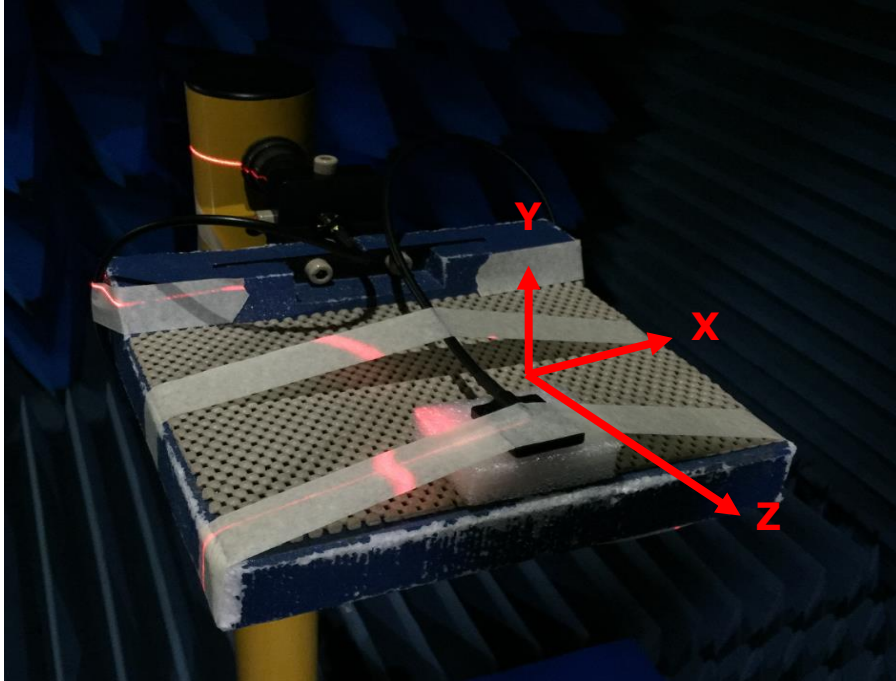

Free Space

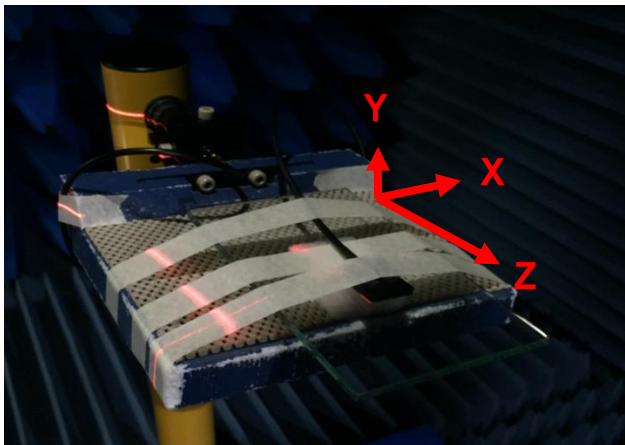

On Glass

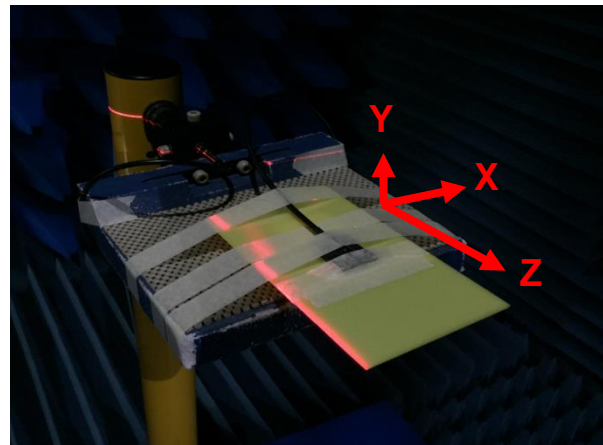


On 2mm ABS

Antenna testing Setup in ETS Anechoic Chamber


4.2 2D Radiation Patterns

4.2.1 In Free Space


XY Plane

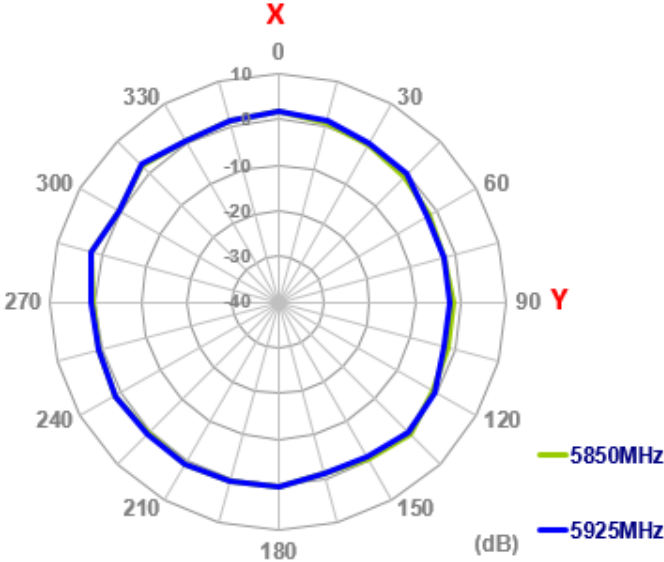

XZ Plane

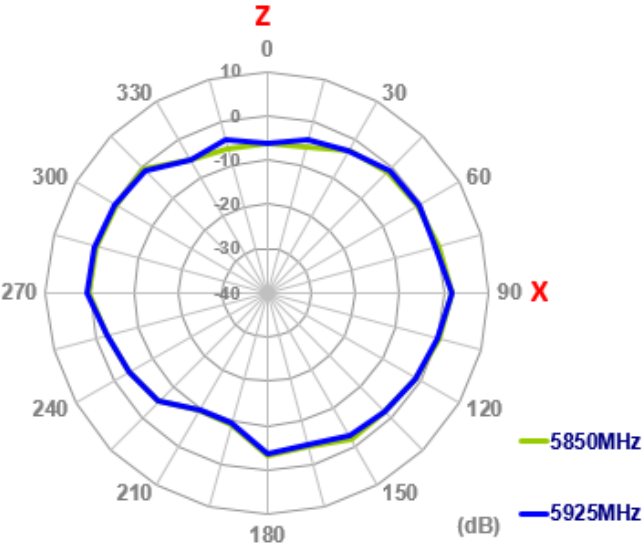


YZ Plane

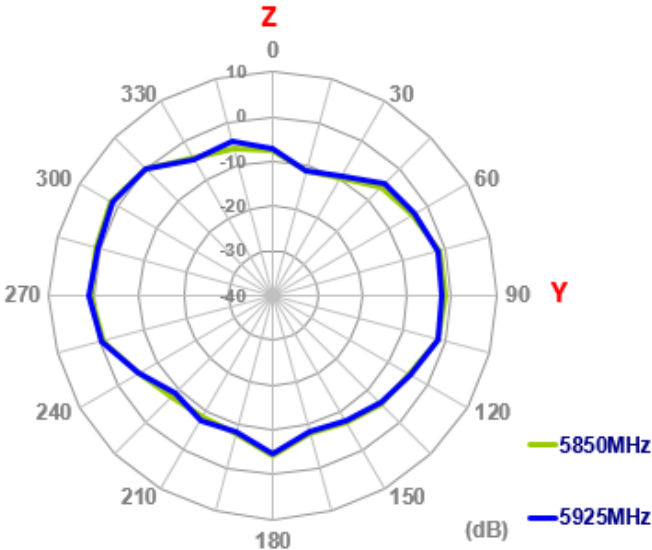


4.2.2 On Glass


XY Plane

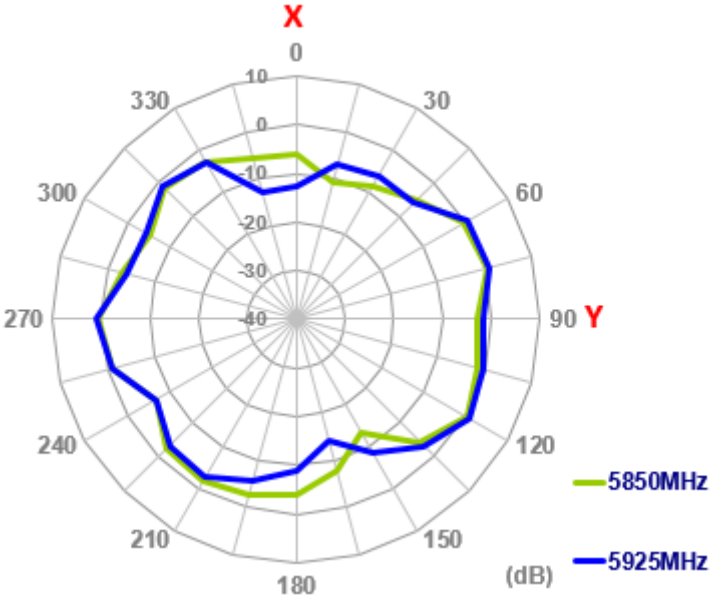

XZ Plane

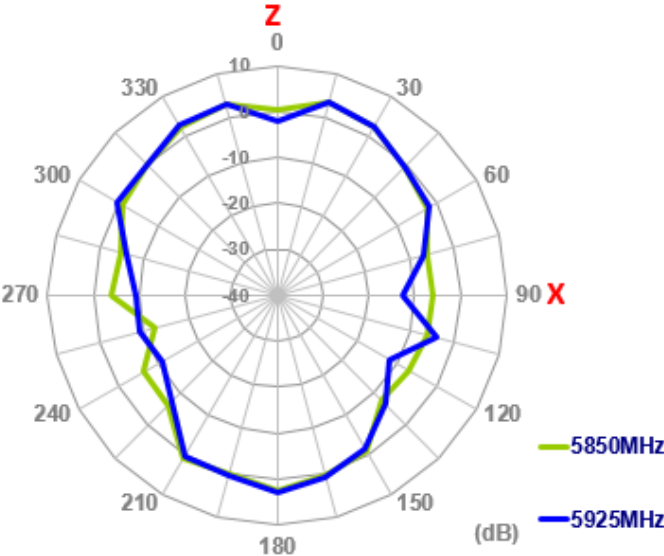


YZ Plane

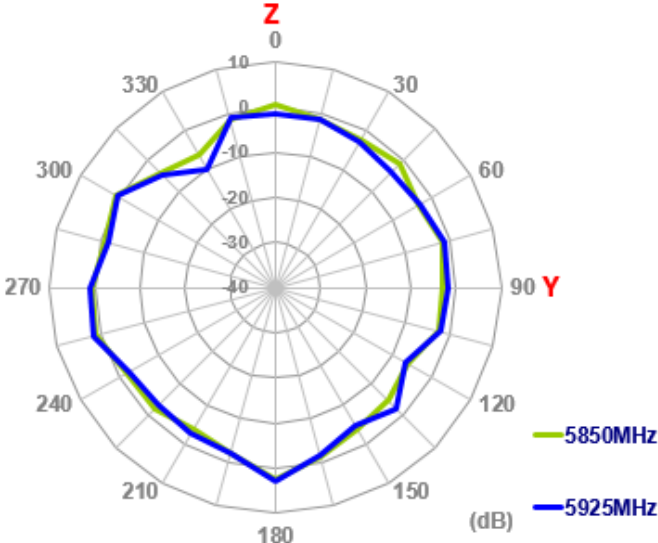


4.2.3 On 2mm ABS


XY Plane

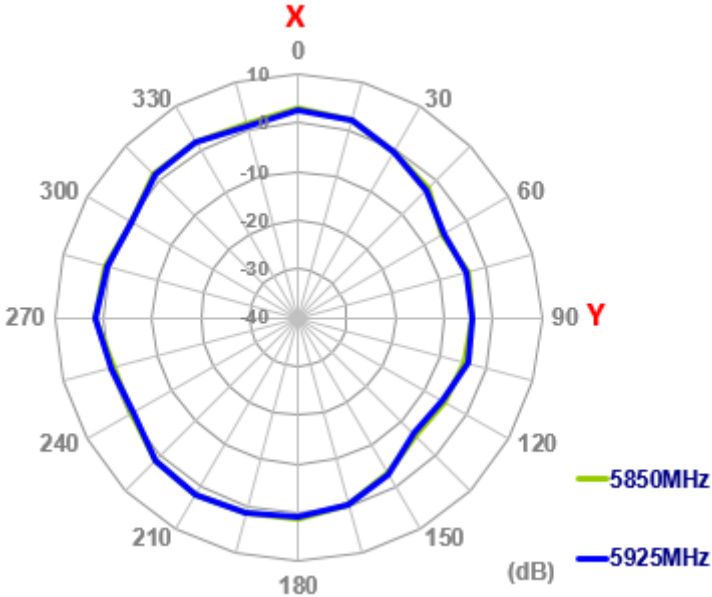

XZ Plane

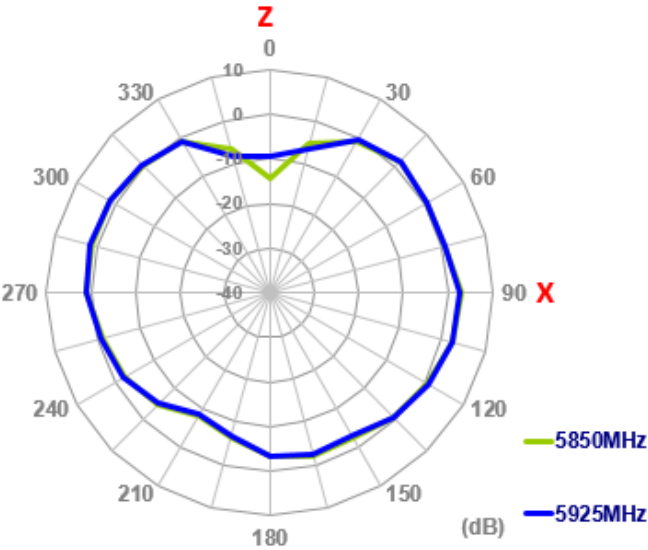


YZ Plane

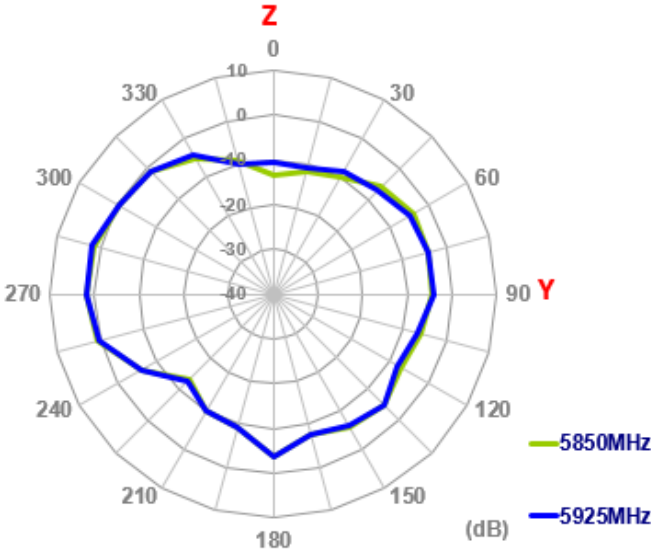




4.3 Antenna 3D Radiation Pattern

4.3.1 In Free Space

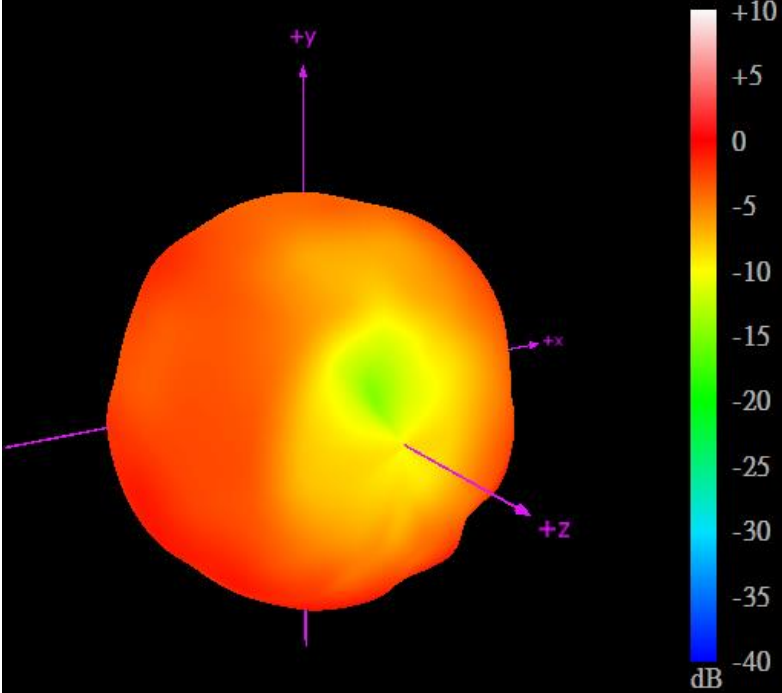


5850MHz

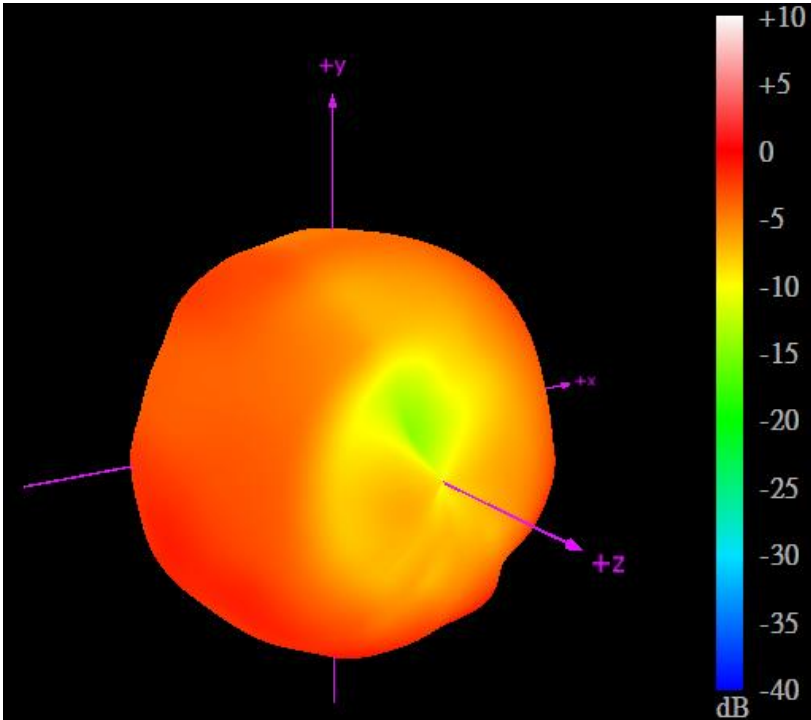


5925MHz

4.3.2 On Glass

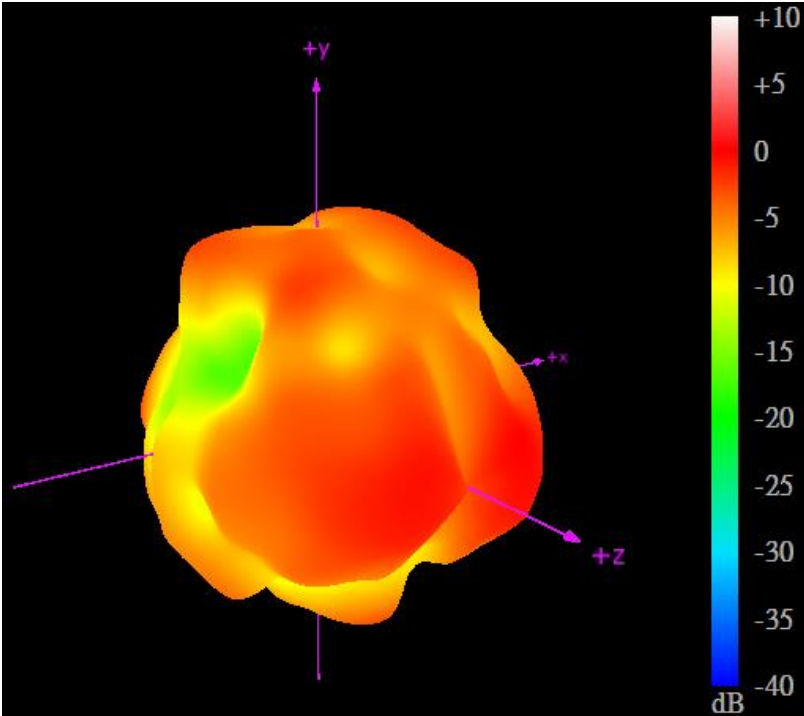


5850MHz

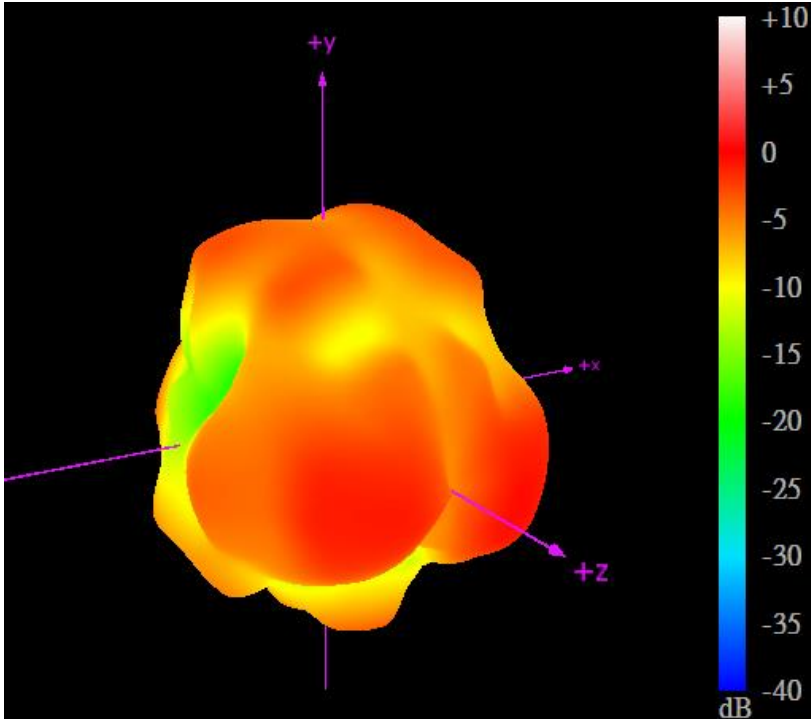


5925MHz

4.3.3 On 2mm ABS

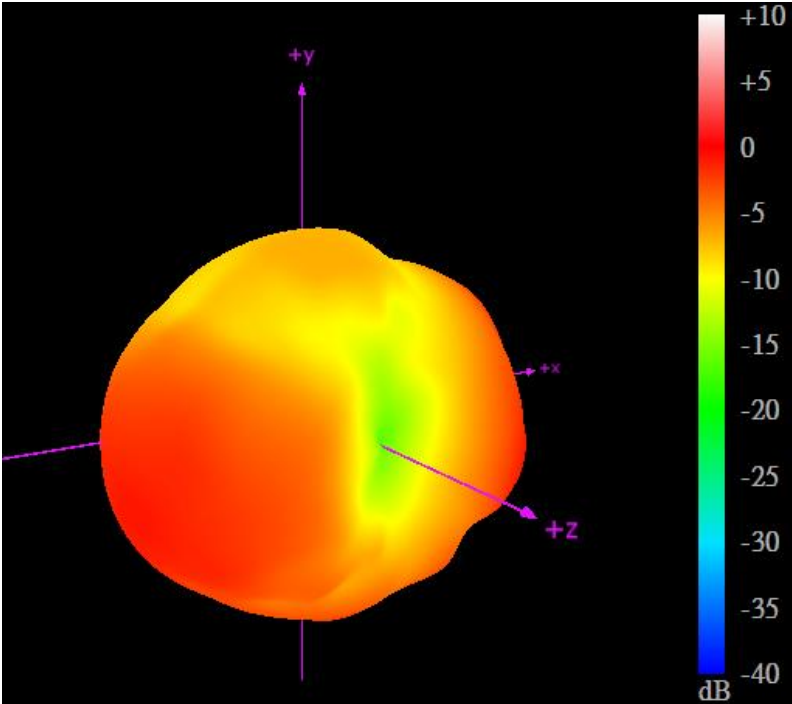


5850MHz

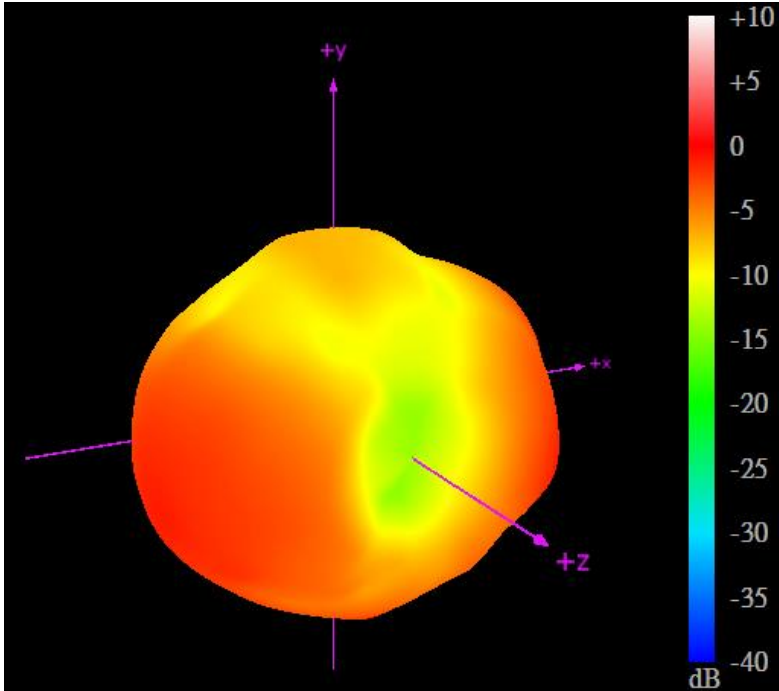

5925MHz


5. Drawing (Unit: mm)

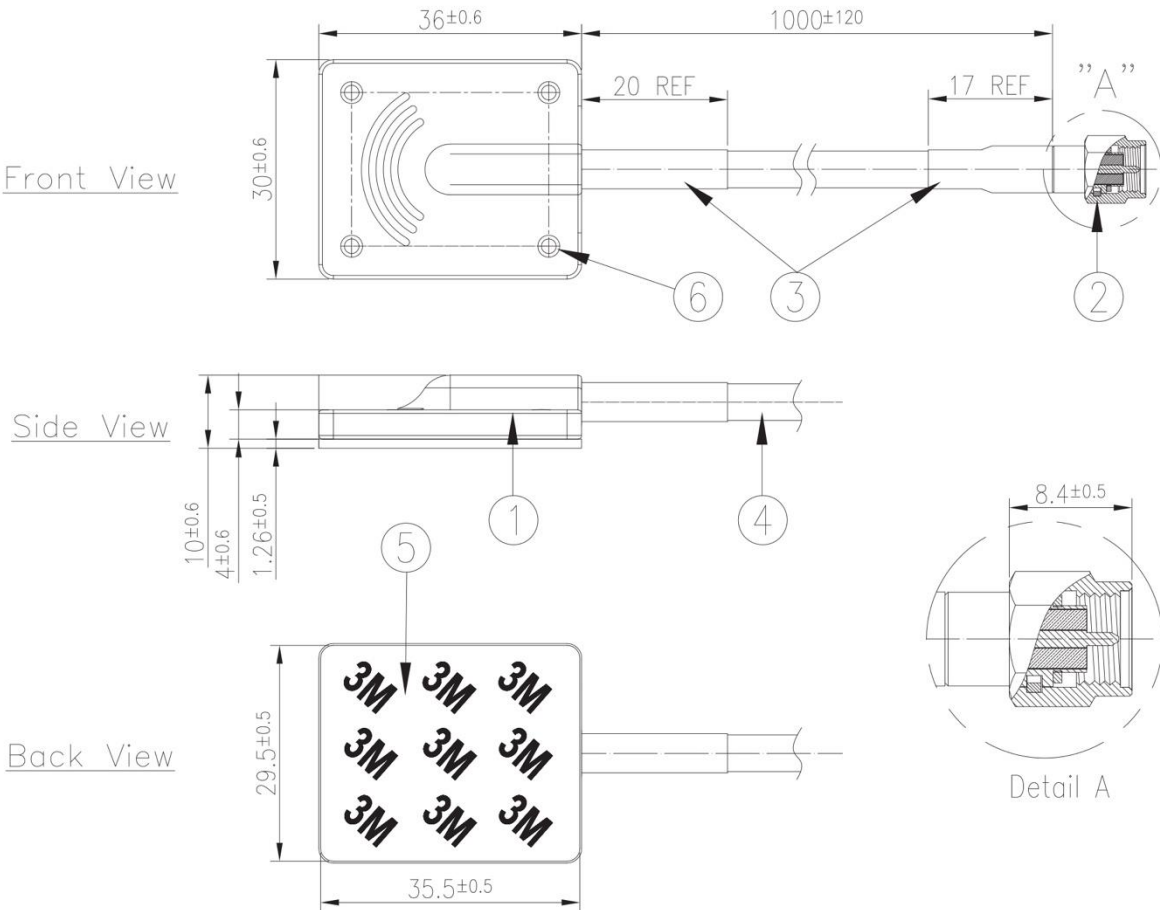


	Name	Material	Finish	QTY
1	GSA.8859 Housing	PP	Black	1
2	SMA(M)ST	Brass	Au Plated	1
3	Heat Shrink Tube	PE	Black	2
4	CFD200 Coaxial Cable	PE	Black	1
5	Double-Side Adhesive With Gray Foam	VHB 4941 1.26t	White Liner	1
6	GSA.8859 PCB	FR4 1.0t	Black	1

6. Packaging


1pc GSA.8859.A.105111 per Small PE Bag
 Bag Dimensions - 160*300 mm
 Weight - 50g

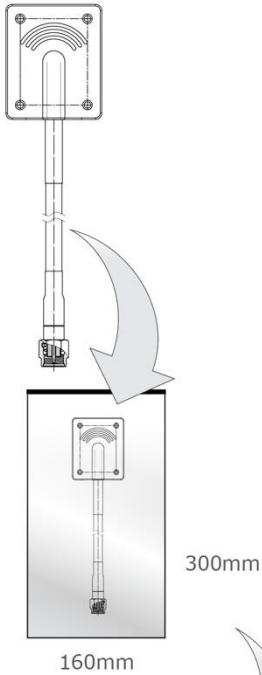

50pcs GSA.8859.A.105111 per Carton
 Carton Dimensions - 320*250*290mm
 Weight - 2.6Kg

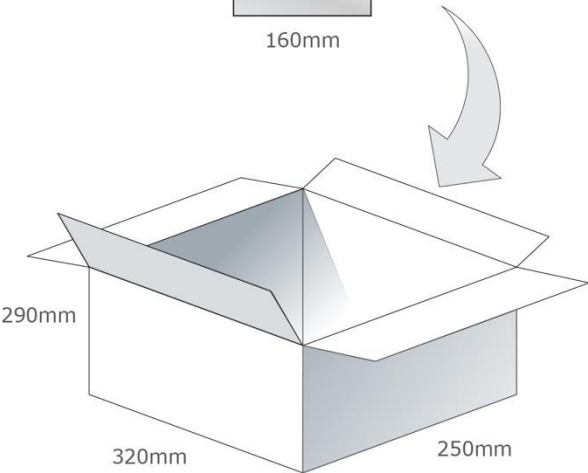

Pallet Dimensions:
 1100mm*1000mm*1360mm
 48 Cartons per Pallet
 12 Cartons per Layer, 4 Layers

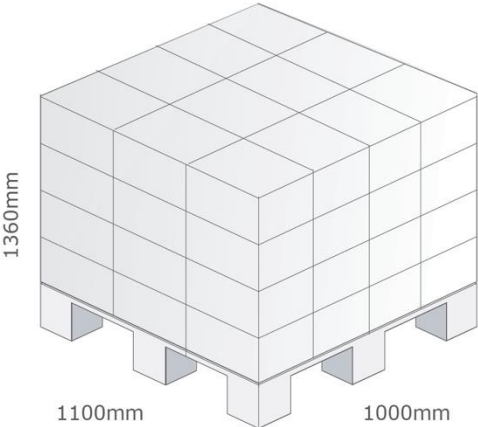


7. Application Note


The GSA.8859 antenna performance with different cable lengths is shown below.

7.1 In free Space


7.1.1 Return Loss

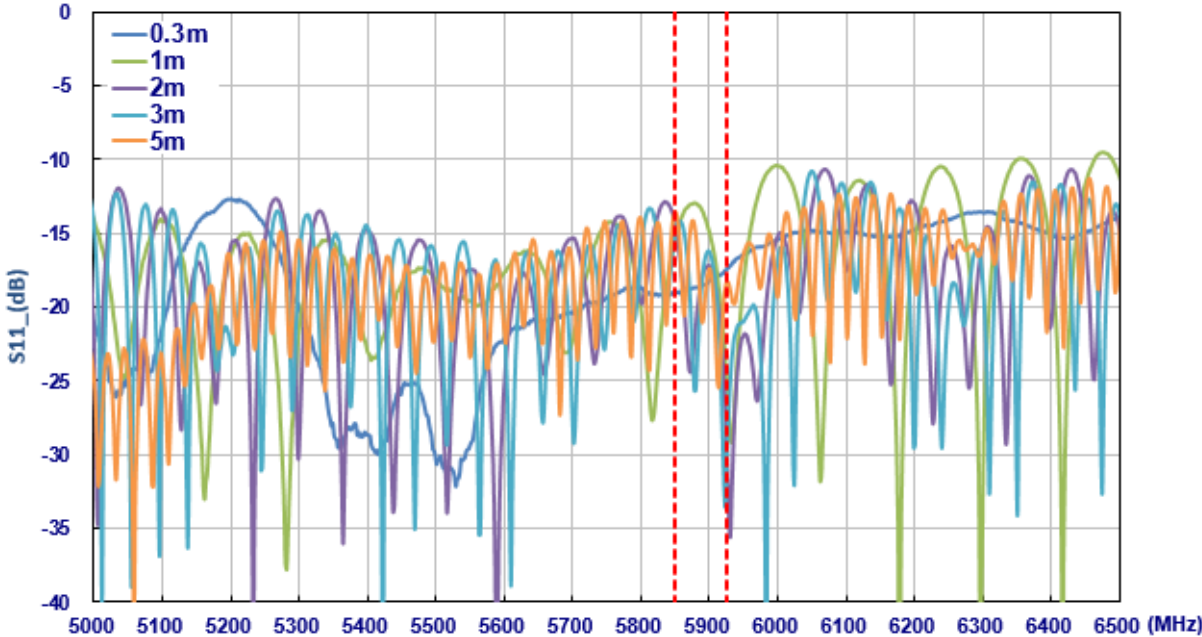


7.1.2 Efficiency

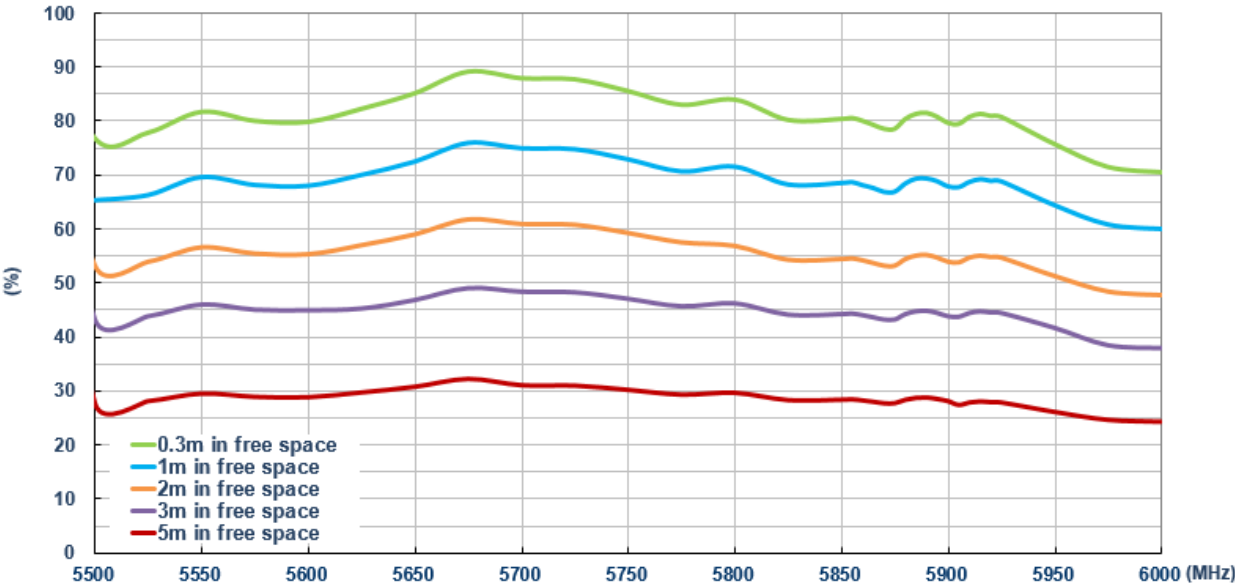

7.1.3 Peak Gain

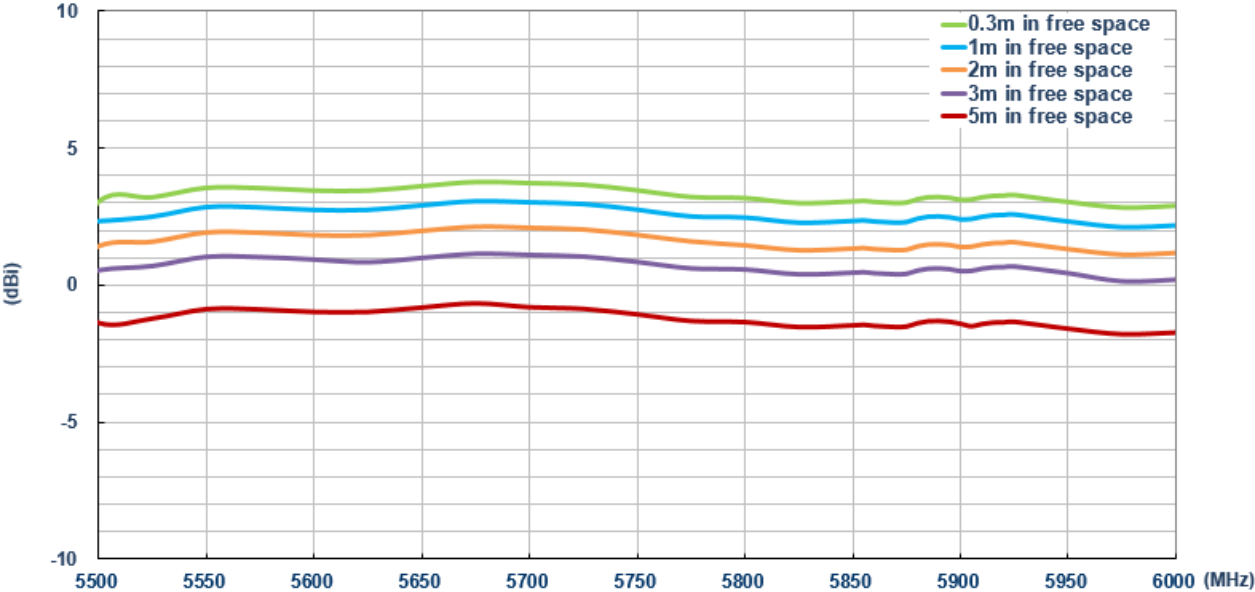


7.1.4 Average Gain

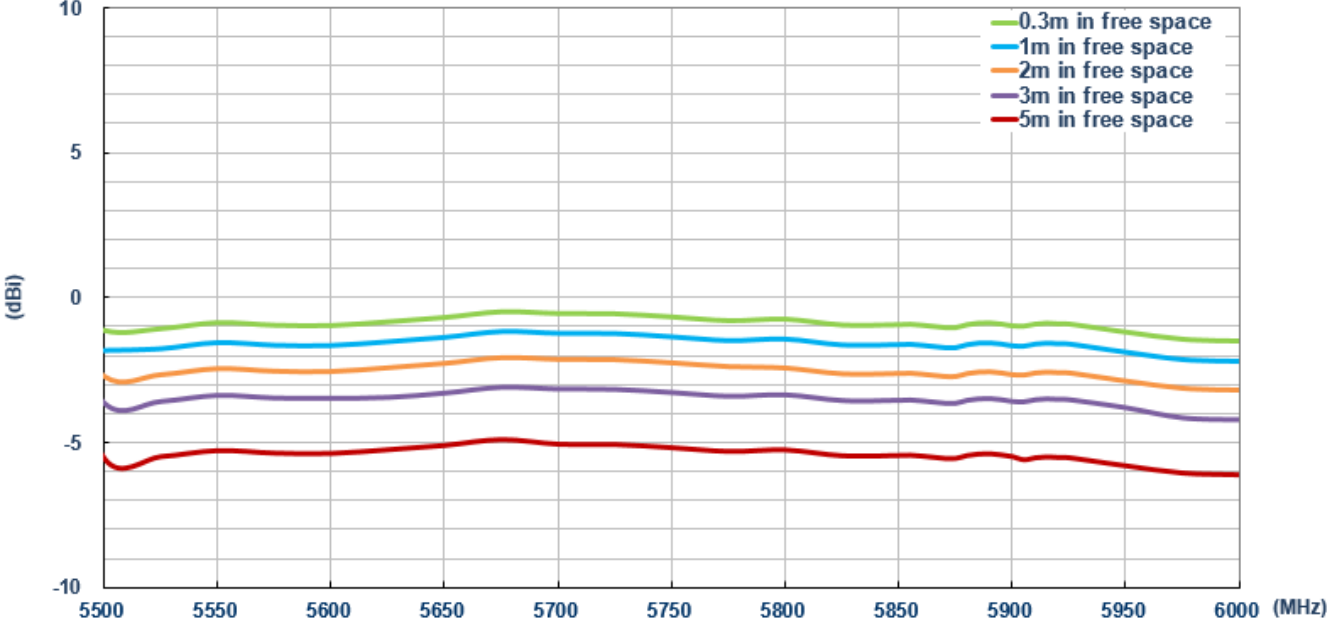


7.2 On Glass


7.2.1 Return Loss

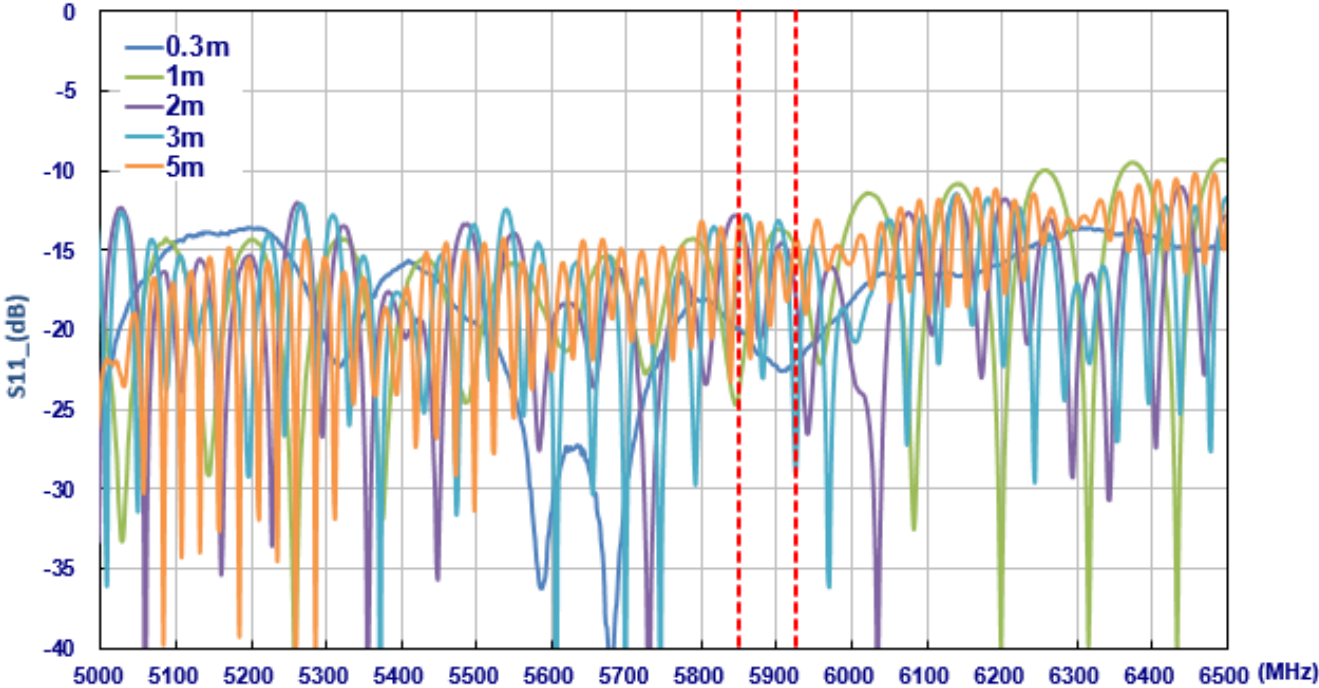


7.2.2 Efficiency

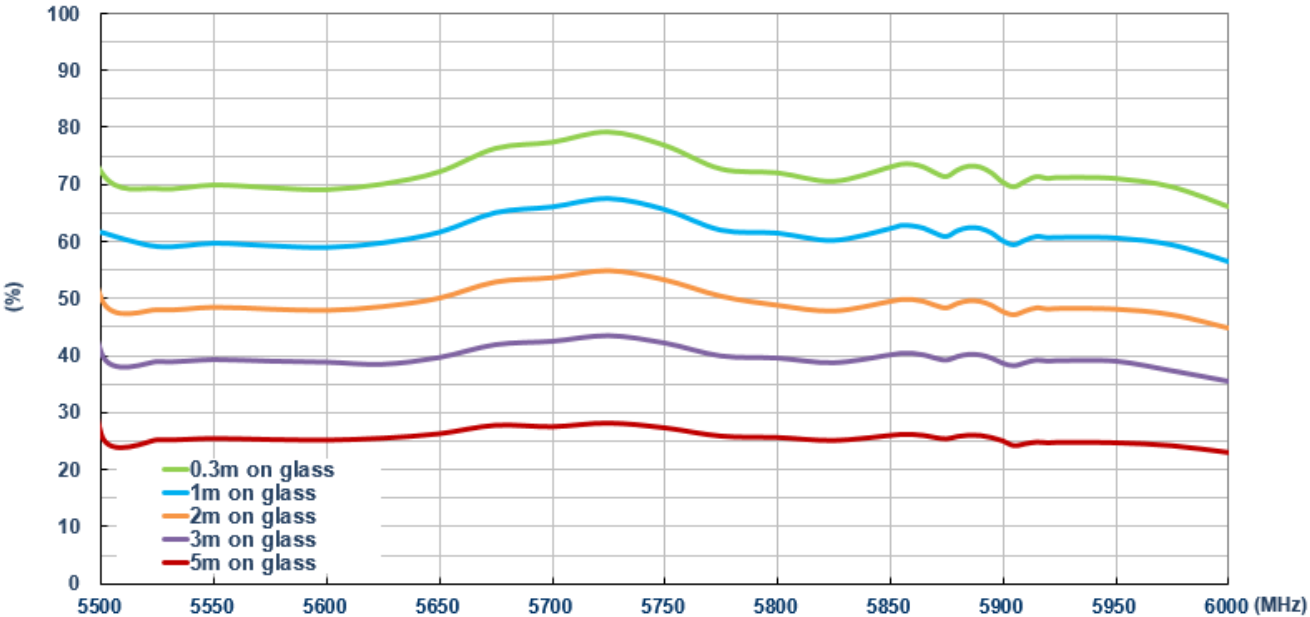

7.2.3 Peak Gain

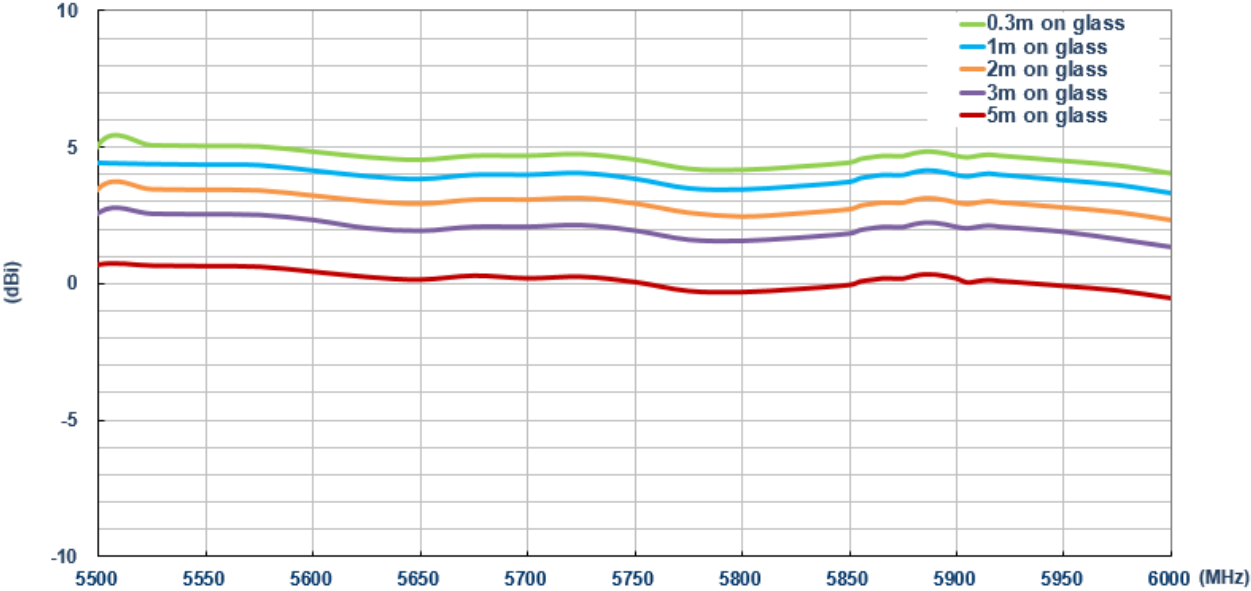


7.2.4 Average Gain

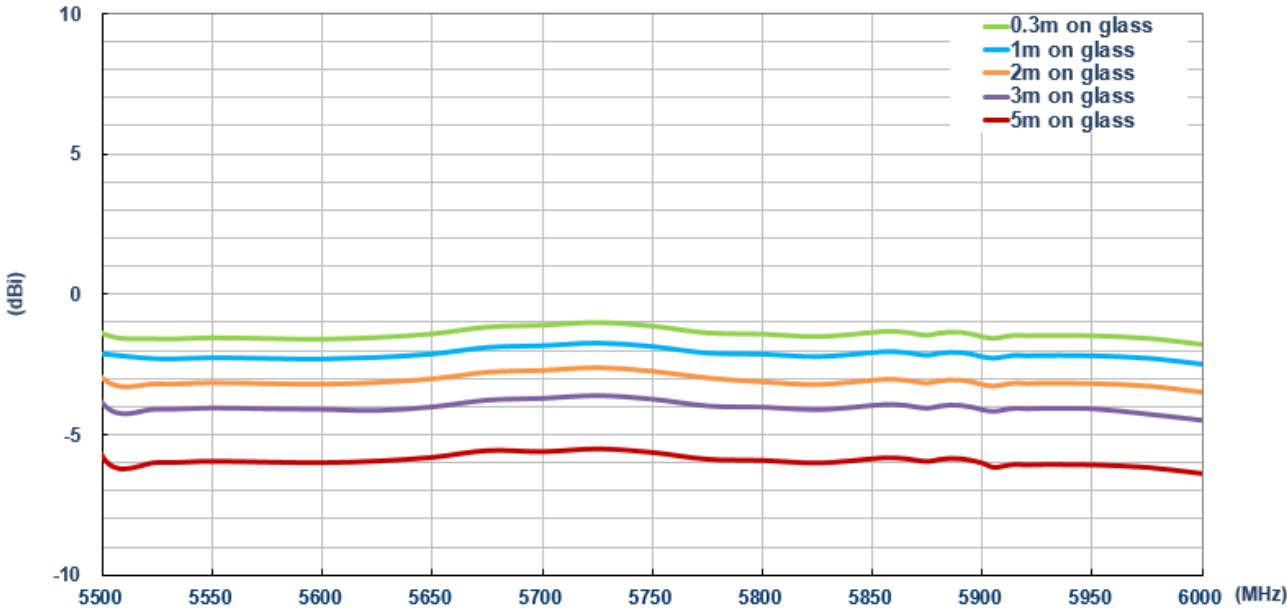


7.3 On 2mm ABS


7.3.1 Return Loss

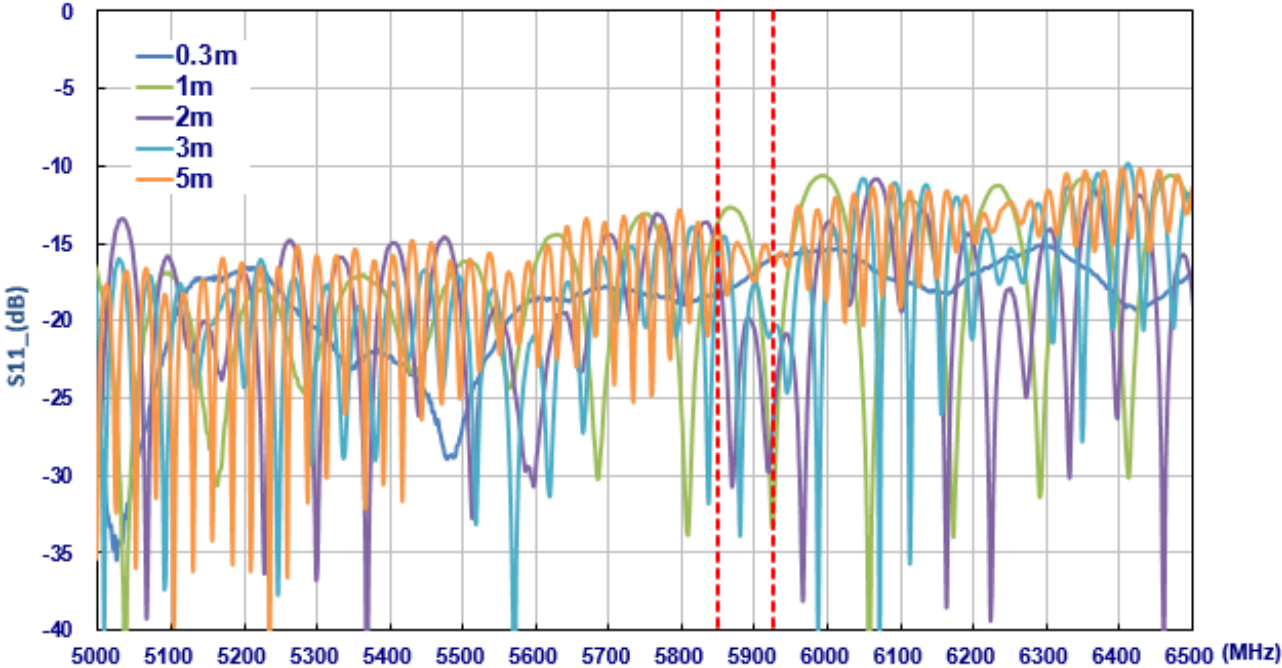


7.3.2 Efficiency

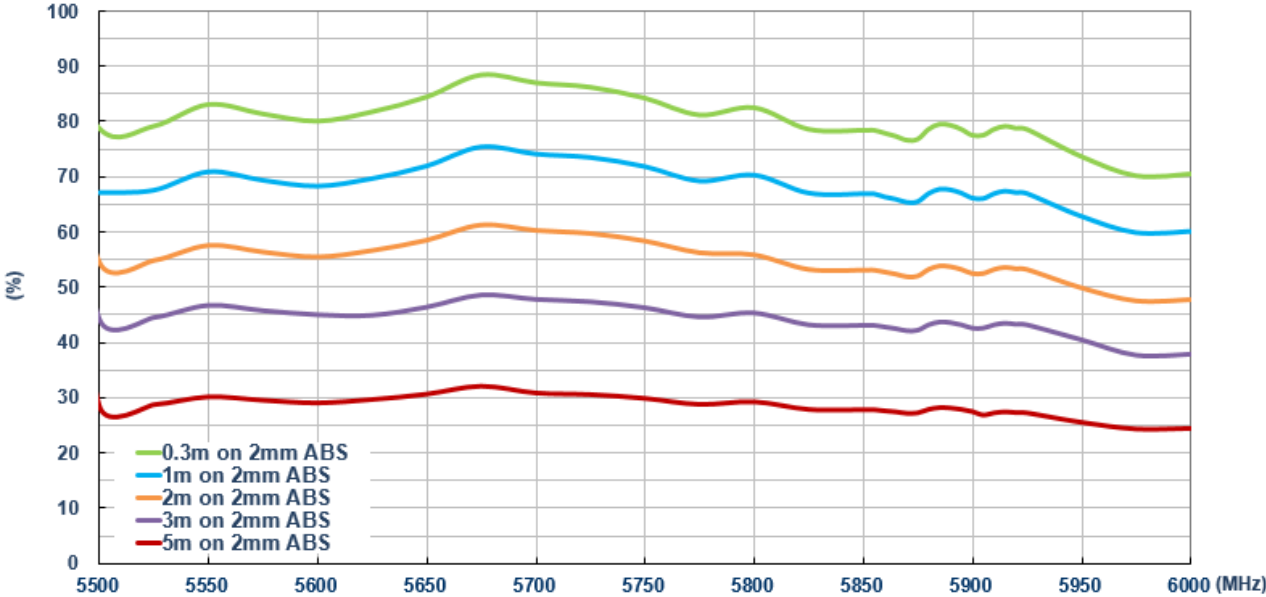

7.3.3 Peak Gain

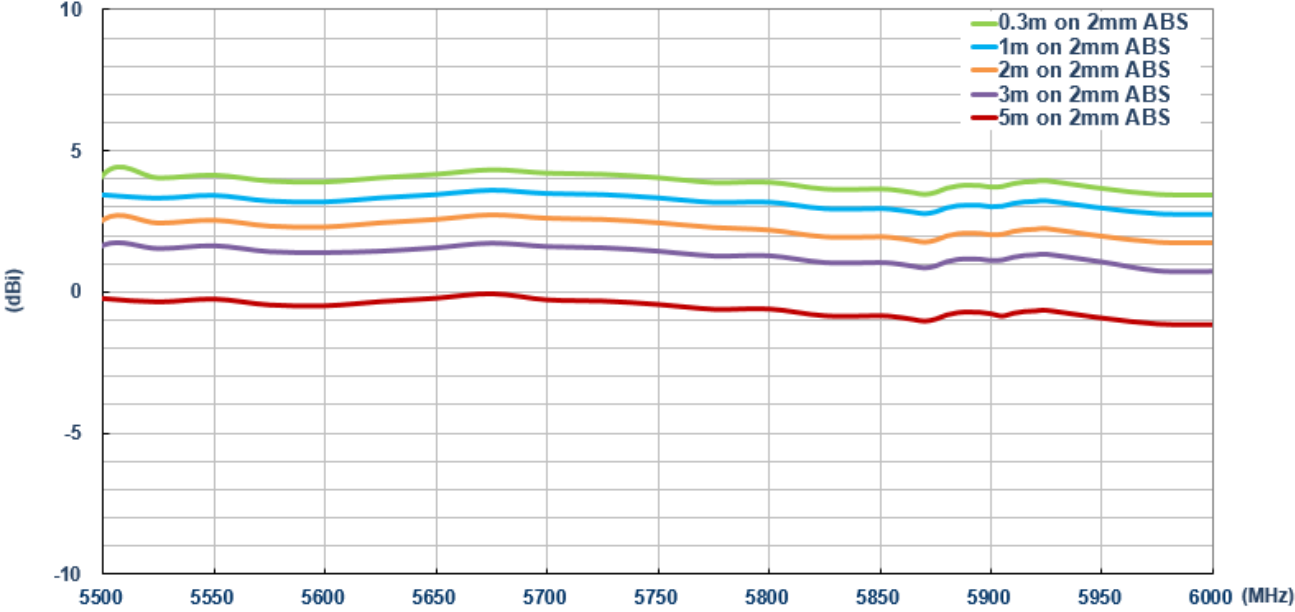

7.3.4 Average Gain

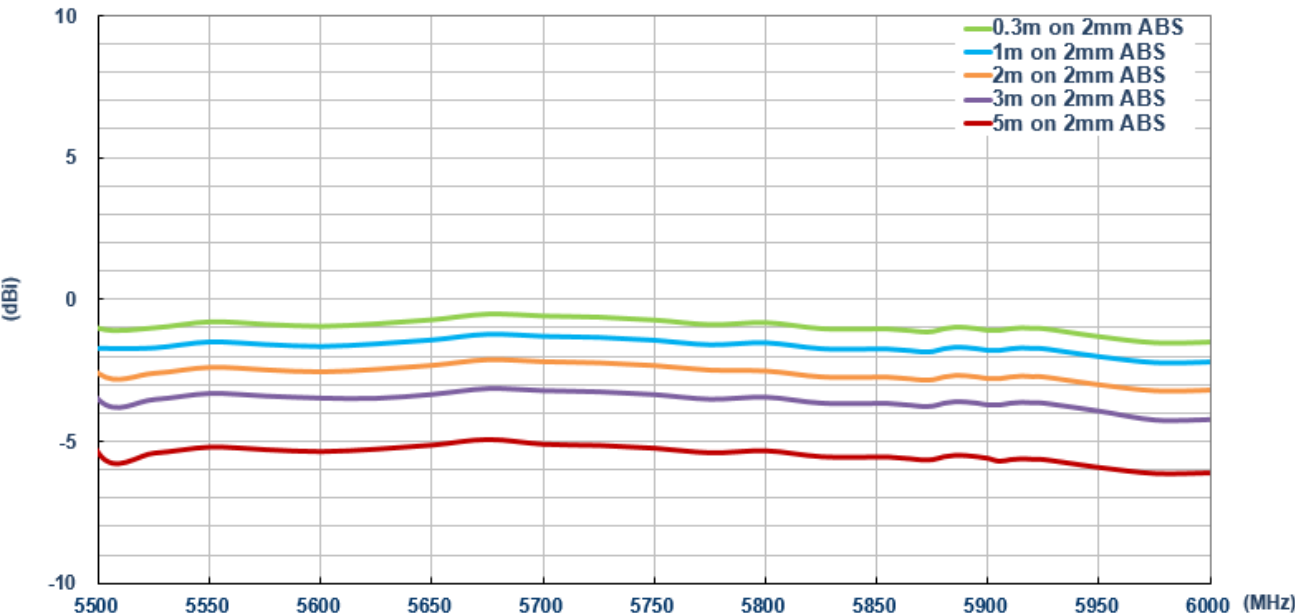



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice.



Taoglas reserves the rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

© Taoglas