


Heat Shrinkable Butt Connectors


Terminal Composition: Tin Plated Copper
Heat Shrink: High density PE
Electrical Rating: 600V
Maximum Current: 22-16: 19 Amps; 16-14: 27 Amps; 12-10: 48 Amps

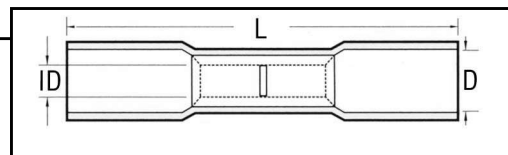


HOFFMAN PART NO.	WIRE SIZE	DIMENSIONS (INCHES)		
		ID	L	D
HSC2216	22-16	.067	1.417	0.1810
HSC1614	16-14	.091	1.417	0.2130
HSC1210	12-10	.134	1.614	0.2560

Heat Shrinkable Disconnects

Terminal Composition: Tin Plated Brass
Heat Shrink: High density PE
Electrical Rating: 300V
Maximum Current: 22-16: 19 Amps; 16-14: 27 Amps; 12-10: 48 Amps
Tab Size: .250 x .032

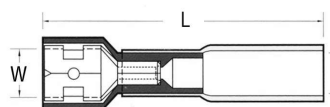

Fully Insulated Female

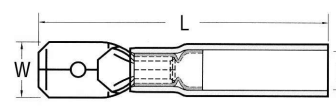

Partially Insulated Male

HOFFMAN PART NO.	WIRE SIZE	DIMENSIONS (INCHES)		
		D	W	L
Partially Insulated with Copper Support Sleeve				
AHSDFT250A	22-16	.217	0.26	1.339
BHSDFT250A	16-14	.236	0.26	1.339
DHSDFT250A	12-10	.319	0.26	1.378
AHSDMT250	22-16	.217	0.25	1.339
BHSDMT250	16-14	.236	0.25	1.339
DHSDMT250	12-10	.319	0.25	1.378
Fully Insulated				
AHSLDFT250A	22-16	.256	0.26	1.437
BHSLDFT250A	16-14	.256	0.26	1.437
DHSLDFT250A	12-10	.295	0.26	1.457
AHSLDMT250	22-16	.256	0.25	1.516
BHSLDMT250	16-14	.256	0.25	1.555
DHSLDMT250	12-10	.295	0.25	1.555

CONGRATULATIONS

YOU FOUND IT!

Thanks for Reviewing Our Catalog

5% OFF

Your Next Hoffman Order

Coupon # 927071118

Contact our Sales Department at **800-645-2014** or **248-395-8460**
 or Print and Fax this Coupon to: **800-908-1295** or **248-967-6399**
 to Redeem Your Coupon

One coupon per customer / minimum \$50.00 order

