ML-9448

REVISION	DESCRIPTION	APP.	DRAWN	DATE	REVISED DRAWING NO.
△ 4	Tolerances Change				
△ 5	Dimension Changed				
△ 6	Revision of Wrong				
△ 7	Revision of Wrong				
△					

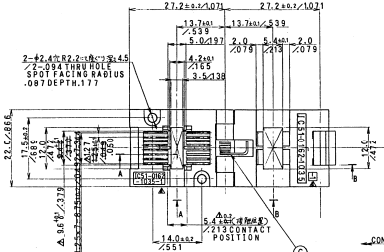



プリント板穴あけ寸法図（裏面より透視）
CONTACT & FIXING SCREW HOLE PATTERN
Pattern shown looking down through top of socket.



接触位置詳細図 (S=10/1)
CONTACT TIP DETAIL

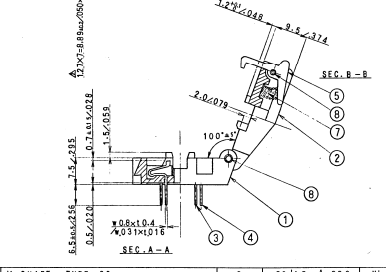

性　能　:SPECIFICATION

1. 絶縁抵抗 :Insulation Resistance
   500MΩ or more at 500V DC.
2. 耐 電 圧 :Dielectric Withstanding Voltage
   750V.AC. for 1 minute.
3. 接触抵抗 :Contact Resistance
   30mΩ or less at 10mA, 20mV. (initial)
4. 耐 久 性 :Durability
   10,000 cycles at max contact travel distance
   0.7/.028 (mechanical)
5. 接 触 力 :Contact Force
   10~220gf. (.1~2.16N) within contact travel distance between 0.35~0.90/.010~.035 each individual contact.
6. 使用温度 :Operation Temperature
   -55℃ ~ +170℃ (max)

ITEM 部品番号	DESCRIPTION 品　名	QUANTITY 個　数	MATERIAL 材質・寸法	CONTENTS 仕　上	PARTS IDENTS 分類符番号
8	M-SHAFT TYPE-06	2	BS #1.5 A=22.0	Ni-PL	SL-7575
7	COIL SPRING TYPE-11	1	SWP φ0.3	Ni-PL	SM-11332
6	COIL SPRING TYPE-37	1	SUS φ0.4		SM-11754
5	SNAP SEGMENT TYPE-23	1	PES(GF)	BLACK	SM-11331
4	CONTACT-112 B	8	BeCu t0.4	Ni-Au PL. CLASS B	SM-10124
3	CONTACT-112	8			
2	IC51-0162-1035 押え板 PUSH COVER	1	PES(GF)	BLACK	SL-11628
1	IC51-0162-1035 絶縁平板 INSULATOR	1			SL-11627

山一電機工業株式会社
YAMAICHI ELECTRIC MFG.CO.,LTD.

分類 KLASS SOP△P127-16

名称 TITLE IC51-0162-1035

TOLERANCES. ±0.3/±.012
Unless otherwise specified.

尺度 SCALE	1/1	単位 UNIT	mm	検図 CHK	製図 DWN	設計 DSN
投影法 PROJECTION	第三角法 THIRD ANGLE PROJECTION					

図番 KL-9448 REV. E