





TOP VIEW

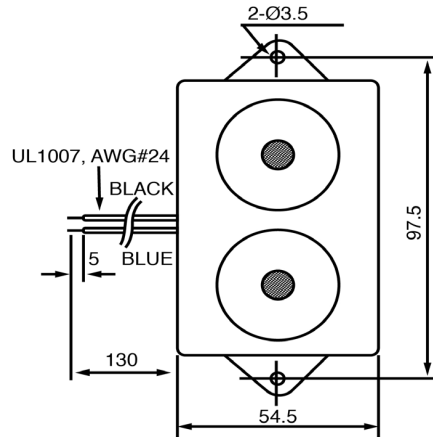

SIDE VIEW

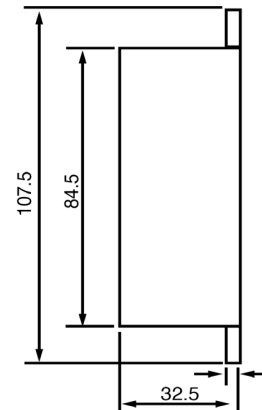

Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description	Date	Approved		
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	10/21/2013	J.S		
Resonant Frequency	3100	(Hz)							
Rated Voltage	12	(V)							
SPL @ 10cm	125	(dBA)							
Tone	Siren								
Mount Type	Flange Mount								
Voltage Range	9 ~ 15	(V)							
Max Rated Current	120	(mA)							
Housing Material	ABS								
Operating Temperature	-20 ~ +60	°C							
Storage Temperature	-20 ~ +60	°C							
Weight	90	(g)							
 <b>DB UNLIMITED</b>						Drawn by      Date      Checked by      Date      Approved by      Date		<b>IP1072612-1</b>	
						A.B.      10/21/2013      C.E.      10/21/2013      J.S      10/21/2013			

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).