

DISTINCTIVE CHARACTERISTICS

- Programmable display graphics for alphanumeric characters and animated sequences
- 64 colors of backlighting can be controlled dynamically
- Pushbutton switches or display with LCD, RGB LED backlighting
- General brightness of backlight is dynamically controlled in eight steps from dark to bright
- Operated by commands and data supplied via serial communications (SPI)
- Incorporates bitmap display function
- Dual image VRAM for quick change of displayed images
- Travel options: Standard travel of 1.8mm, or long travel of 4.5mm (same as KP01 Series)
- Low energy consumption
- Dust tight construction


Viewing areas:
 Switches - 17.0mm x 13.0mm (horizontal x vertical)
 Display - 14.4mm x 11.8mm

High reliability and long life of one million (short travel) or three million (long travel) actuations


High resolution of 64 x 32 pixels

Epoxy sealed straight PC terminals

Snap-in standoff legs on the switches, or display's bracket with crimped legs, ensure secure mounting and alignment and prevent dislodging during wave soldering.

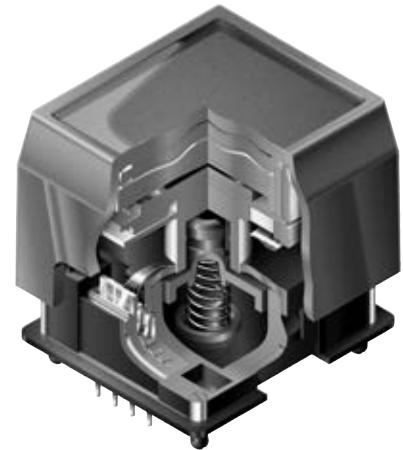

Actual Sizes of Switches & Display

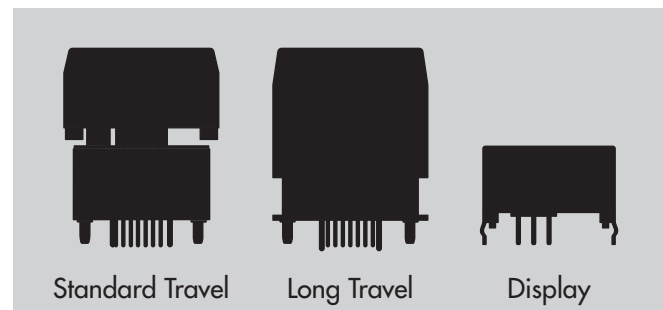

Standard Travel

Long Travel

Display



IS15EBFP4RGB-09YN
 RGB LED Backlight
 Black and White LCD
 Standard Travel

IS15EBFP4RGB
 RGB LED Backlight
 Black and White LCD
 Long Travel





SWITCH PART NUMBERS & DESCRIPTION

| Part Numbers | Switch Description | LCD Mode | LED Color |
|---|--|--------------------------------|----------------|
| IS15EBFP4RGB-09YN IS15EBFP4RGB | SPST Momentary ON Gold Contacts Straight PC Terminals | Black & White FSTN Positive | Red/Green/Blue |





SWITCH SPECIFICATIONS

| | Standard Travel | Long Travel |
|---|-----------------------------------|-----------------------------------|
| Circuit | SPST normally open | SPST normally open |
| Electrical Capacity (Resistive Load) | 100mA @ 12V DC | 100mA @ 12V DC |
| Contact Resistance | 200 milliohms maximum @ 20mV 10mA | 200 milliohms maximum @ 20mV 10mA |
| Insulation Resistance | 100 megohms minimum @ 100V DC | 100 megohms minimum @ 100V DC |
| Dielectric Strength | 125V AC for 1 minute minimum | 125V AC for 1 minute minimum |
| Mechanical Endurance | 1,000,000 operations minimum | 3,000,000 operations minimum |
| Electrical Endurance | 1,000,000 operations minimum | 3,000,000 operations minimum |
| Operating Force | 1.7 ± 0.5 Newtons | 2.0 ± 0.5 Newtons |
| Total Travel | 1.8mm (.071") | 4.5mm (.177") |

TYPICAL SWITCH DIMENSIONS FOR STANDARD TRAVEL

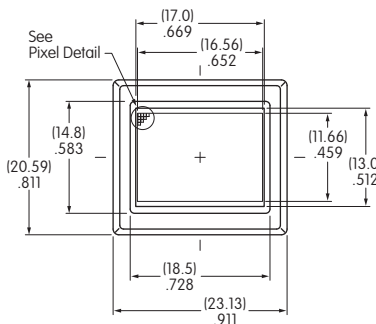


Terminal numbers are not on the switch.

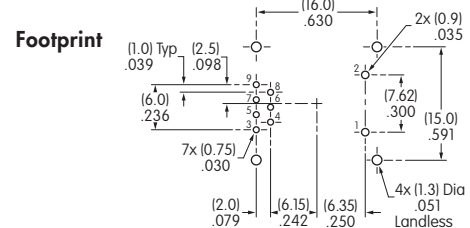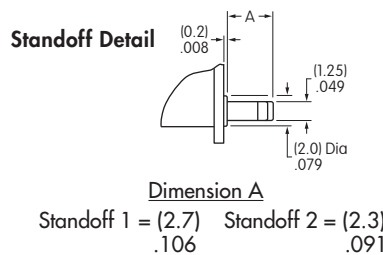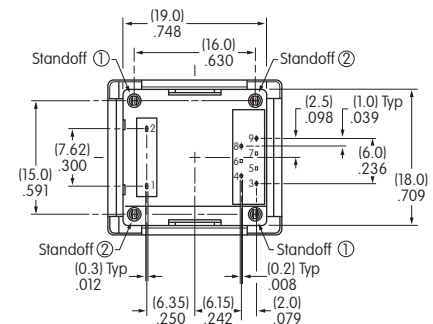


The Compact LCD 64 x 32 Pushbutton may utilize the same footprint as the Standard Travel LCD 64 x 32 Pushbutton.


TYPICAL SWITCH DIMENSIONS FOR LONG TRAVEL

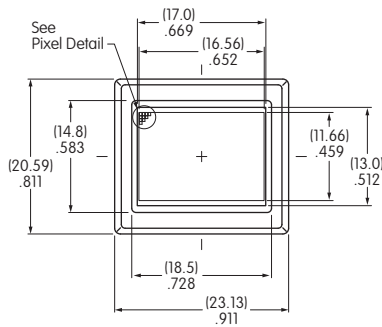

Pixel Detail



Standoff Detail





Dimension A

Standoff 1 = (2.7) / .106 Standoff 2 = (2.3) / .091

Footprint

Terminal numbers are not on the switch.

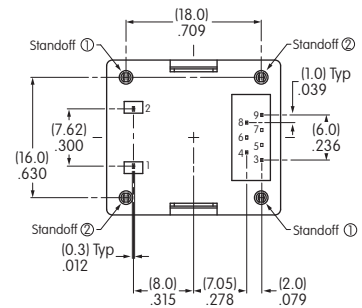

The following pages for LCD 64 x 32 Pushbuttons apply to both the Standard Travel and Long Travel LCD 64 x 32 Pushbuttons.

LCD SPECIFICATIONS

Characteristics of Display

| | |
|------------------------------|---|
| Display Operation Mode | FSTN positive; background colors, black & white |
| Display Condition | Transflective with built-in LED backlight |
| Viewing Angle Direction | 6 o'clock |
| Viewing Area | 17.0mm x 13.0mm (horizontal x vertical) |
| Pixel Format | 64 x 32 pixels (horizontal x vertical) |
| Pixel Size | 0.239mm x 0.345mm (horizontal x vertical) |
| *Operating Temperature Range | -15°C ~ +50°C (+5°F ~ +122°F) |
| Storage Temperature Range | -20°C ~ +60°C (-4°F ~ +140°F) |
| Backlight LED | RGB: red/green/blue |

* In a low temperature environment (below 0°C), speed and contrast decrease when image changes. The non-indicator dot may become dense in a high temperature environment (about +50°C). Highest backlight brightness level should not be used for temperatures above +35°C.

Absolute Maximum Ratings (Temperature at 25°C)

| Items | Symbols | Ratings |
|----------------|-----------------|--------------------------------|
| Supply Voltage | V _{DD} | -0.3V to +7.0V |
| Input Voltage | V _I | -0.3V to V _{DD} +0.3V |
| Output Voltage | V _O | -0.3V to V _{DD} +0.3V |

Optical Characteristics (Temperature at 25°C)

| Items | Symbols | Min | Typical | Max |
|--------------------------|--------------|-----|---------|-----|
| Contrast Ratio | Cr | — | 3.0 | — |
| Viewing Angle (Cr ≥ 1.1) | Up & Down | θ | 90° | — |
| | Right & Left | φ | 90° | — |


Recommended Operating Conditions (Temperature at 25°C)

| Items | Symbols | Minimum | Typical | Maximum |
|--------------------------|-----------|--------------|---------|-------------|
| Supply Voltage | V_{DD} | 4.9V | 5.0V | 5.1V |
| High Level Input Voltage | V_{IH} | $0.8 V_{DD}$ | — | — |
| Low Level Input Voltage | V_{IL} | — | — | $0.2V_{DD}$ |
| SPI Clock Frequency | f_{SCK} | — | — | 8MHz |
| Current Consumption | I_{DD} | ** 10mA | — | *** 60mA |

** 10mA: Backlighting LED is off

*** 60mA: Backlighting LEDs (Red, Green, Blue) are maximum brightness

SWITCH BLOCK DIAGRAM & PIN CONFIGURATIONS

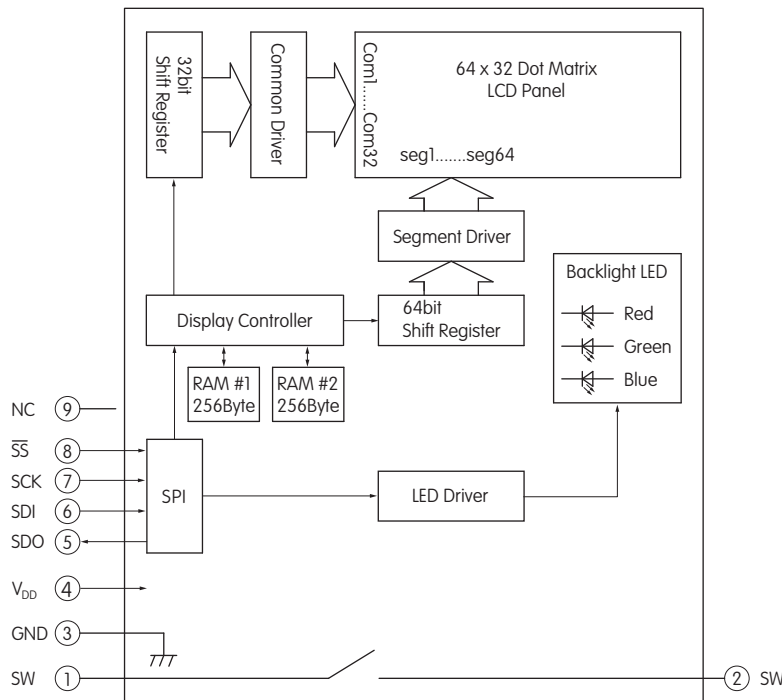

| Pin No. | Symbol | Name | Function |
|---------|-----------------|--------------------|--|
| ① | SW | Terminal of Switch | Normally open |
| ② | SW | Terminal of Switch | Normally open |
| ③ | GND | Ground | |
| ④ | V_{DD} | Power | Power source for logic circuit and LCD |
| ⑤ | SDO | Data Out | Data output line for SPI |
| ⑥ | SDI | Data In | Data input line for SPI |
| ⑦ | SCK | Serial Clock | Clock line for SPI that synchronizes commands and data |
| ⑧ | \overline{SS} | Slave Select | Chip select for SPI; line is active low |
| ⑨ | NC | None | No connection |

DISPLAY PART NUMBER & DESCRIPTION

| Part Number | Terminals | LCD Mode | LED Color |
|-------------------|-------------|--------------------------------|----------------|
| IS01EBFRGB | Straight PC | Black & White FSTN Positive | Red/Green/Blue |

LCD SPECIFICATIONS

Characteristics of Display

| | |
|-------------------------------|---|
| Display Operation Mode | FSTN positive; background colors, black & white |
| Display Condition | Transflective with built-in LED backlight |
| Viewing Angle Direction | 6 o'clock |
| Viewing Area | 14.4mm x 11.8mm (horizontal x vertical) |
| Pixel Format | 64 x 32 pixels (horizontal x vertical) |
| Pixel Size | 0.200mm x 0.285mm (horizontal x vertical) |
| * Operating Temperature Range | -15°C ~ +50°C (+5°F ~ +122°F) |
| Storage Temperature Range | -20°C ~ +60°C (-4°F ~ +140°F) |
| Backlight LED | RGB: red/green/blue |

* In a low temperature environment (below 0°C), speed and contrast decrease when image changes. The non-indicator dot may become dense in a high temperature environment (about +50°C). Highest backlight brightness level should not be used for temperatures above +35°C.

Recommended Operating Conditions (Temperature at 25°C)

| Items | Symbols | Minimum | Typical | Maximum |
|--------------------------|------------------|---------------------|---------|--------------------|
| Supply Voltage | V _{DD} | 4.9V | 5.0V | 5.1V |
| High Level Input Voltage | V _{IH} | 0.8 V _{DD} | — | — |
| Low Level Input Voltage | V _{IL} | — | — | 0.2V _{DD} |
| SPI Clock Frequency | f _{SCK} | — | — | 8MHz |
| Current Consumption | I _{DD} | ** 10mA | — | *** 60mA |

** 10mA: Backlighting LED is off

*** 60mA: Backlighting LEDs (Red, Green, Blue) are maximum brightness


Absolute Maximum Ratings (Temperature at 25°C)

| Items | Symbols | Ratings |
|----------------|-----------------|--------------------------------|
| Supply Voltage | V _{DD} | -0.3V to +7.0V |
| Input Voltage | V _I | -0.3V to V _{DD} +0.3V |
| Output Voltage | V _O | -0.3V to V _{DD} +0.3V |

Optical Characteristics (Temperature at 25°C)

| Items | Symbols | Minimum | Typical | Maximum |
|-----------------------------|--------------|---------|---------|---------|
| Contrast Ratio | Cr | — | 3.0 | — |
| Viewing Angle (Cr ≥ 1.1) | Up & Down | θ | 90° | — |
| | Right & Left | φ | 90° | — |


DISPLAY BLOCK DIAGRAM & PIN CONFIGURATIONS

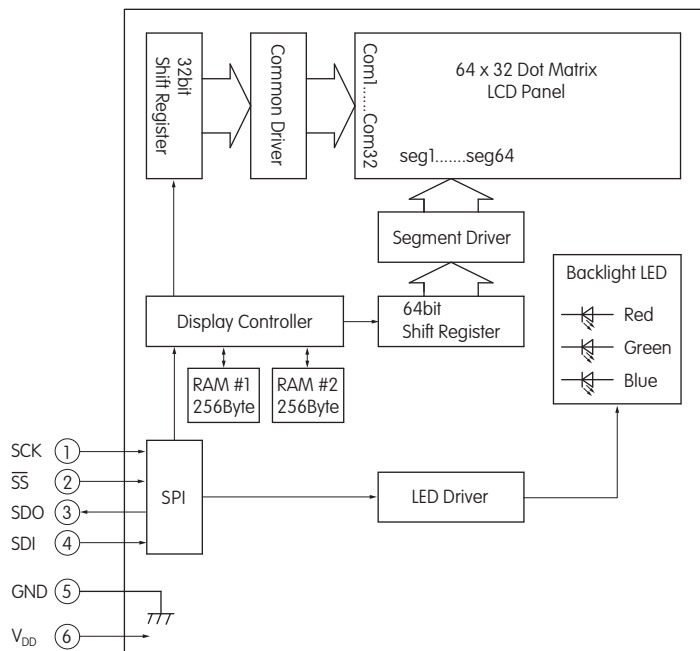



ISO1EBFRGB
RGB LED Backlight
Black and White LCD

| Pin No. | Symbol | Name | Function |
|---------|-----------------|--------------|--|
| ① | SCK | Serial Clock | Clock line for SPI that synchronizes commands and data |
| ② | \overline{SS} | Slave Select | Chip select for SPI; line is active low |
| ③ | SDO | Data Out | Data output line for SPI |
| ④ | SDI | Data In | Data input line for SPI |
| ⑤ | GND | Ground | |
| ⑥ | V _{DD} | Power | Power source for logic circuit and LCD |


TYPICAL DISPLAY DIMENSIONS



Pixel Detail



Footprint

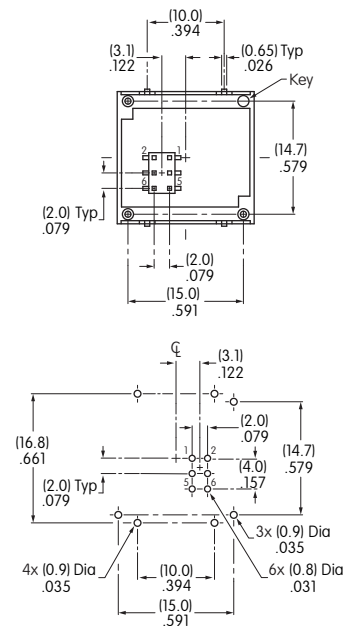

Terminal numbers are not on the device.

Toggles

Rockers

Pushbuttons

Illuminated PB

Programmable **E**

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement

DISTINCTIVE CHARACTERISTICS

Compact Size Combined with High Resolution

- High resolution of 64 x 32 pixels
- 64 colors of backlighting can be controlled dynamically
- Pushbutton switch with LCD, RGB LED backlighting
- General brightness of backlight is dynamically controlled in eight steps from dark to bright
- Operated by commands and data supplied via serial communications (SPI)
- Can display as many as four lines of text with ten characters each
- Incorporates bitmap display function
- Programmable display graphics for alphanumeric characters and animated sequences
- Dual image VRAM for quick change of displayed images
- Low energy consumption
- Dust tight construction

Viewing area: 14.5mm x 11.8mm (horizontal x vertical)

Variety of LED backlighting with 64 colors and 8 steps brightness


Dome gives crisp tactile feedback to positively indicate circuit transfer

Epoxy sealed straight PC terminals

Snap-in standoff for easy, secure mounting and alignment



Actual Size



PART NUMBER & DESCRIPTION

| Part Number | Switch Description | LCD Mode | LED Color |
|----------------------|--|--------------------------------|----------------|
| IS15ESBFP4RGB | SPST Momentary ON Gold Contacts Straight PC Terminals | Black & White FSTN Positive | Red/Green/Blue |

SWITCH SPECIFICATIONS

| | |
|--------------------------------------|-----------------------------------|
| Circuit | SPST normally open |
| Electrical Capacity (Resistive Load) | 100mA @ 12V DC |
| Contact Resistance | 200 milliohms maximum @ 20mV 10mA |
| Insulation Resistance | 100 megohms minimum @ 100V DC |
| Dielectric Strength | 125V AC for 1 minute minimum |
| Mechanical Endurance | 1,000,000 operations minimum |
| Electrical Endurance | 1,000,000 operations minimum |
| Operating Force | 1.7 ± 0.5 Newtons |
| Total Travel | 1.8mm (.071") |

Absolute Maximum Ratings (Temperature at 25°C)

| Items | Symbols | Ratings |
|----------------|-----------------|--------------------------------|
| Supply Voltage | V _{DD} | -0.3V to +7.0V |
| Input Voltage | V _I | -0.3V to V _{DD} +0.3V |
| Output Voltage | V _O | -0.3V to V _{DD} +0.3V |

Optical Characteristics (Temperature at 25°C)

| Items | Symbols | Minimum | Typical | Maximum |
|--------------------------|--------------|---------|---------|---------|
| Contrast Ratio | Cr | — | 3.0 | — |
| Viewing Angle (Cr ≥ 1.1) | Up & Down | θ | 90° | — |
| | Right & Left | φ | 90° | — |

LCD SPECIFICATIONS

Characteristics of Display

| | |
|-------------------------|---|
| Display Operation Mode | FSTN positive; background colors, black & white |
| Display Condition | Transflective with built-in LED backlight |
| Viewing Angle Direction | 6 o'clock |
| Viewing Area | 14.5mm x 11.8mm (horizontal x vertical) |
| Pixel Format | 64 x 32 pixels (horizontal x vertical) |
| Pixel Size | 0.200mm x 0.285mm (horizontal x vertical) |
| * Operating Temp Range | -15°C ~ +50°C (+5°F ~ +122°F) |
| Storage Temp Range | -20°C ~ +60°C (-4°F ~ +140°F) |
| Backlight LED | RGB: red/green/blue |

* In a low temperature environment (below 0°C), speed and contrast decrease when image changes. The non-indicator dot may become dense in a high temperature environment (about +50°C). Highest backlight brightness level should not be used for temperatures above +35°C.

Recommended Operating Conditions (Temperature at 25°C)

| Items | Symbols | Minimum | Typical | Maximum |
|--------------------------|------------------|---------------------|---------|--------------------|
| Supply Voltage | V _{DD} | 4.9V | 5.0V | 5.1V |
| High Level Input Voltage | V _{IH} | 0.8 V _{DD} | — | — |
| Low Level Input Voltage | V _{IL} | — | — | 0.2V _{DD} |
| SPI Clock Frequency | f _{SCK} | — | — | 8MHz |
| Current Consumption | I _{DD} | ** 10mA | — | *** 60mA |


** 10mA: Backlighting LED is off

*** 60mA: Backlighting LEDs (Red, Green, Blue) are maximum brightness

BLOCK DIAGRAM & PIN CONFIGURATIONS





IS15ESBFP4RGB
RGB LED Backlight
Black and White LCD


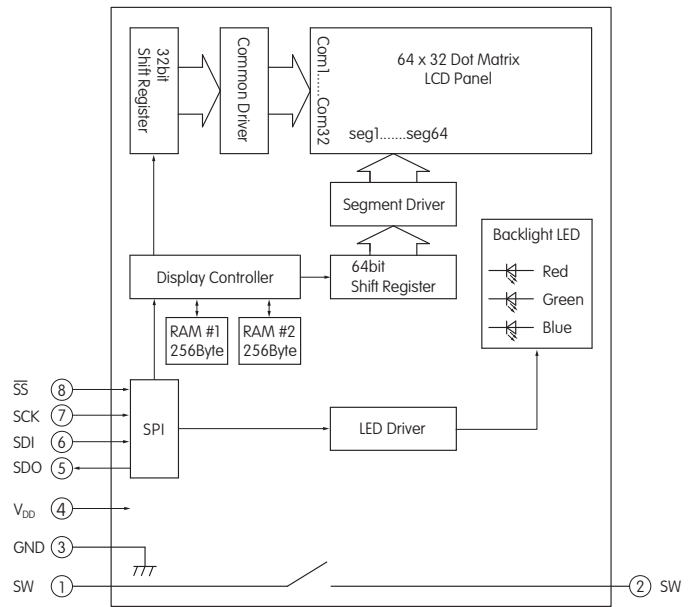


| Pin No. | Symbol | Name | Function |
|---------|-----------------|--------------------|--|
| ① | SW | Terminal of Switch | Normally open |
| ② | SW | Terminal of Switch | Normally open |
| ③ | GND | Ground | |
| ④ | V _{DD} | Power | Power source for logic circuit and LCD |
| ⑤ | SDO | Data Out | Data output line for SPI |
| ⑥ | SDI | Data In | Data input line for SPI |
| ⑦ | SCK | Serial Clock | Clock line for SPI that synchronizes commands and data |
| ⑧ | SS | Slave Select | Chip select for SPI; line is active low |


TYPICAL SWITCH DIMENSIONS

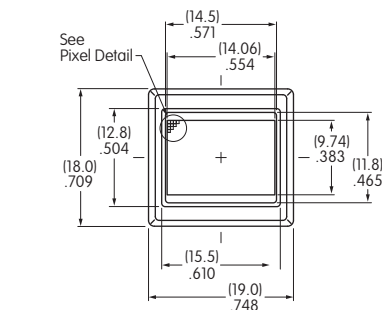


Terminal numbers are not on the switch.



Standoff Detail



Footprint

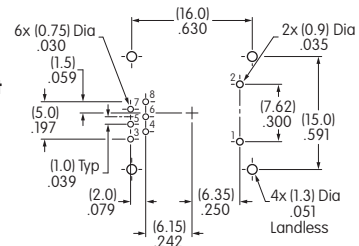

Dimension A

Standoff 1 = (2.7) .106 Standoff 2 = (2.3) .091

The Compact LCD 64 x 32 Pushbutton may utilize the same footprint as the Standard Travel LCD 64 x 32 Pushbutton.


TIMING SPECIFICATIONS FOR SWITCHES & DISPLAY

SPI Characteristics (See Timing Diagram)


(Temperature at -15°C ~ +50°C and $V_{DD} = 5.0V \pm 2\%$)

| Items | Symbols | Minimum | Maximum |
|---------------------------------|-------------|---------|---------|
| SPI \overline{SS} Set Up Time | t_{sSS} | 10ns | |
| SPI \overline{SS} Hold Time | t_{hSS} | 10ns | |
| SPI_CLK Cycle | t_{cycCK} | | 8MHz |
| SPI_CLK Width | t_{hwCK} | 10ns | |
| SPI_DI Set Up Time | t_{sDI} | 10ns | |
| SPI_DI Hold Time | t_{hDI} | 10ns | |
| SPI_DO Delay Time | t_{dDO} | 10ns | |

SPI Timing Chart (\overline{SS} Using)

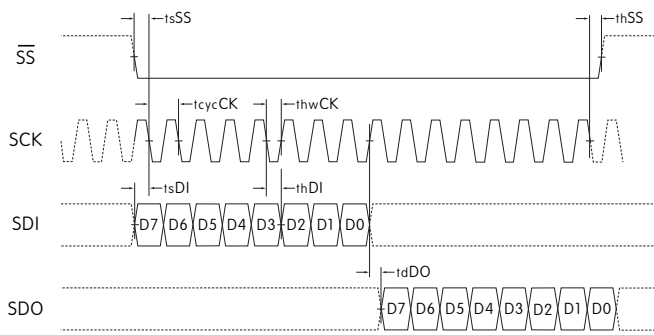


Circuit Example

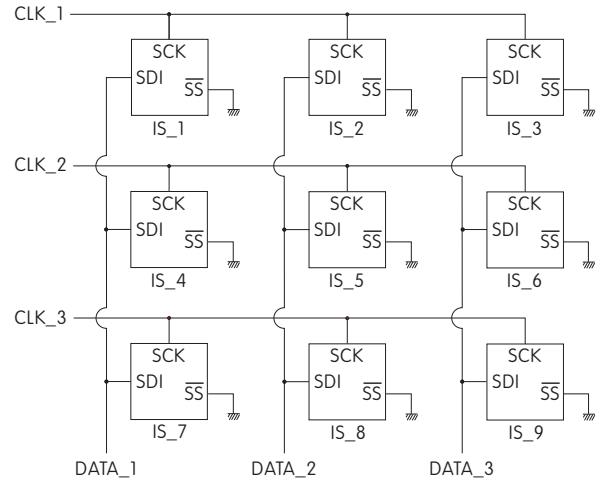

It is recommended that all \overline{SS} pins be connected to a controller pin instead of ground. A clock glitch during power up could cause the communication to fall out of sync. Toggling the \overline{SS} line resets the communication.

SPI Timing Chart (\overline{SS} Low Level Fixed)

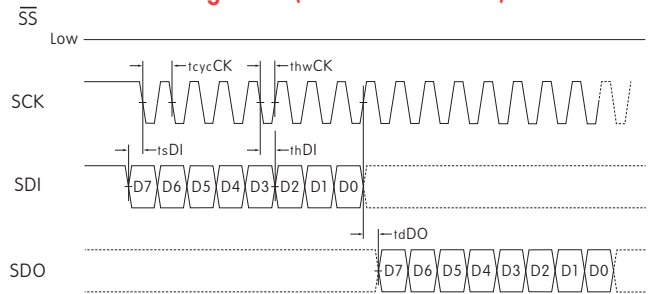

SDI and SCK shall be kept high when idle.

BITMAP

Segment

| Common | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | ••• | 16 | ••••• | 49 | ••• | 56 | 57 | 58 | 59 | 60 | 61 | 62 | 63 | 64 | |
|--------|---------|----|----|----|----|----|----|----|-------|-----|----|-------|-------|-----|----|----|---------|----|----|----|----|----|----|--|
| | Byte8 | | | | | | | | Byte7 | | | | Byte2 | | | | Byte1 | | | | | | | |
| COM1 | D0 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | D0 | ••• | D7 | ••• | D0 | ••• | D7 | D0 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | |
| | Byte16 | | | | | | | | | | | | | | | | Byte9 | | | | | | | |
| COM2 | D0 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | | | | | | | | | | | | | | | | |
| • | | | | | | | | | | | | | | | | | • | | | | | | | |
| • | | | | | | | | | | | | | | | | | • | | | | | | | |
| • | | | | | | | | | | | | | | | | | • | | | | | | | |
| | Byte256 | | | | | | | | ••• | | | | ••• | | | | Byte249 | | | | | | | |
| COM32 | D0 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | | | | | | | | | | | | | | | | |

Transferring Display Data/Displaying LCD Command and Data Sequence

| Command | Data (256 Bytes) | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|------------------|----|----|----|----|----|----|----|-------------------|----|-----|----|----|----|----|----|---------|----|----|----|----|--|--|--|
| 0 x 55 | Byte1 | | | | | | | | Byte2 ••• Byte255 | | | | | | | | Byte256 | | | | | | | |
| 0 1 0 1 0 1 0 1 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | D7 | D6 | ••• | D1 | D0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | | |

Notes: Display RAM has two screen areas. The first area is for the display on current LCD; the second area is for the data to be displayed next. The screens are changed when the second area is fully stored. Set an interval of 16msec or more from the end of the previous data reception to the start of the next command reception.

COMMANDS & DATA

- Transferring display data/displaying on LCD: command (1 Byte) + data (256 Bytes)
- Others: command (1 Byte) + data (1 Byte)
- Commands can be accepted only when all bits coincide; otherwise, they are not acknowledged
- Additional commands will not be received until the communication of commands (1 Byte) and data (256 or 1 Byte) is completed
- There is no time limit from the beginning to end of data receipt
- Commands may be executed consecutively (no need to wait between commands), except for display data
- For display data, set an interval of 16msec or more from the end of previous data reception to the start of the next command reception
- Irregular commands or data are not recognized
- Initial status at power activation: LCD display off, LED off (brightness 1/20, color off)

Transferring Display Data/Displaying on LCD

| Command | | Data | Remarks |
|---------|----------|----------------------------------|--------------------------------------|
| Hex | Binary | | |
| 0 x 55 | 01010101 | 256 Bytes (64 x 32 = 2,048 bits) | See above for details of bitmap data |

LED (Backlight) Color Set

| Command | | Data | Remarks |
|---------|----------|-------------------------------|--|
| Hex | Binary | | |
| 0 x 40 | 01000000 | R R G G B B 1 1 2 bits x 3 | For each of RGB: 00 = off 10 = 1/2 01 = 1/4 11 = full |

LED (Backlight) Brightness Set

| Command | | Data | Remarks |
|---------|----------|---------------------------|---|
| Hex | Binary | | |
| 0 x 41 | 01000001 | * * * 1 1 1 1 1 3 bits | For leading 3bits: 000 = 1/20 (dark) 100 = 1/3 001 = 1/10 101 = 1/2 010 = 1/7 110 = 2/3 011 = 1/5 111 = full (bright) |

Reset (Returning to Initial Status at Power Activation)

| Command | | Data | Remarks |
|---------|----------|----------|---|
| Hex | Binary | | |
| 0 x 5E | 01011110 | 00000011 | Returning to initial status at power activation |

Toggles
 Rockers
 Pushbuttons
 Illuminated PB
 Programmable
 Keylocks
 Rotaries
 Slides
 Tactiles
 Tilt
 Touch
 Indicators
 Accessories
 Supplement

PRECAUTIONS FOR HANDLING & STORAGE OF LCD 64 x 32 DEVICES

Handling

1. The IS Series devices are electrostatic sensitive.
2. Limit operating force to keytop to 100.0N maximum, as excessive pressure may damage the LCD device.
3. The IS series devices are not process sealed.
4. If the LCD is accidentally broken, avoid contact with the liquid and wash off any liquid spills to the skin or clothing.
5. Clean cap surface with dry cloth. If further cleaning is needed, wipe with dampened cloth using neutral cleanser and dry with clean cloth. Do not use organic solvent.
6. Recommended soldering time and temperature limits:
Do not exceed 60°C at the LCD level.
Wave Soldering: see Profile B in Supplement section.
Manual Soldering for Switch: see Profile A in Supplement section.
Manual Soldering for Display: see Profile B in Supplement section.
7. Excessive images may result after the same image is emitted continuously for an extended period of time.
8. The highest backlight brightness level should not be used for temperatures above +35°C.

Storage

1. Store in original container and away from direct sunlight.
2. Keep away from static electricity.
3. Avoid extreme temperatures, high humidity, gaseous substances, and all forms of chemical contamination.




OPTIONAL ACCESSORIES

AT9704-02YC Socket for Single and Bicolor LCD 36 x 24 Pushbutton

Materials:

Base - Glass Fiber Reinforced PBT
 Terminals - Brass/Beryllium Copper

- The socket permits the SmartDisplay to be plugged in after automated processing.
- Use of the socket enables easy field replacement of the device.

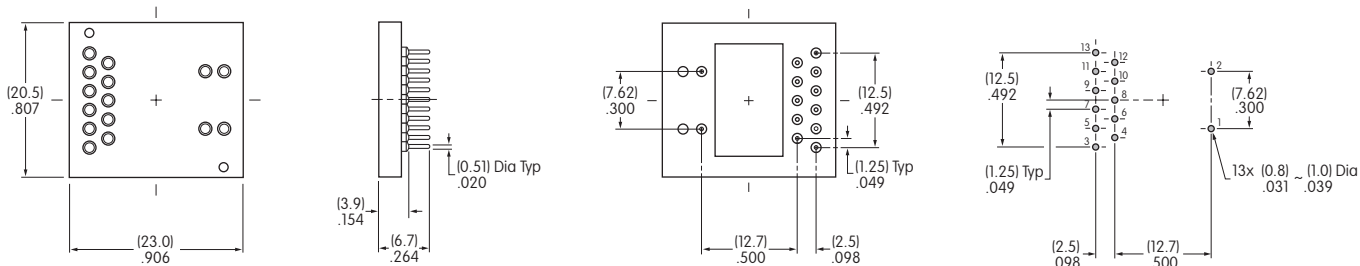

Compatible Part Number for AT9704-02YC

LCD 36 x 24


IS15BAFP4CF

AT9704-065E Socket for RGB LCD 36 x 24 Pushbutton

Materials:

Base - Glass Fiber Reinforced PBT
 Terminals - Brass/Beryllium Copper

- The socket permits the RGB SmartDisplay to be plugged in after automated processing.
- Use of the socket enables easy field replacement of the device.

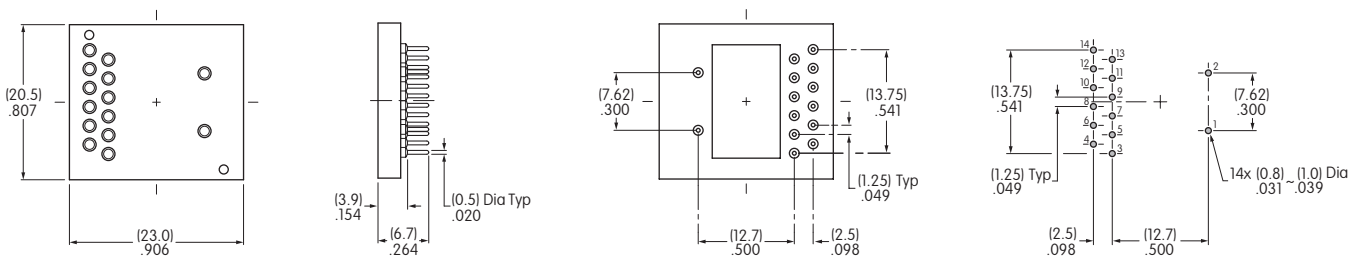

Compatible Part Numbers for AT9704-065E

RGB LCD 36 x 24

IS15BBFP4RGB

Bicolor LCD 36 x 24

* IS15BAFP4CF


* AT9704-065E Socket may be used with IS15BAFP4CF by removing pin 3.

AT9704-065F Socket for Compact Pushbutton (All Models)

Materials:

Base - Glass Fiber Reinforced PBT
 Terminals - Brass/Beryllium Copper

- The socket permits the Compact SmartDisplay to be plugged in after automated processing.
- Use of the socket enables easy field replacement of the device.

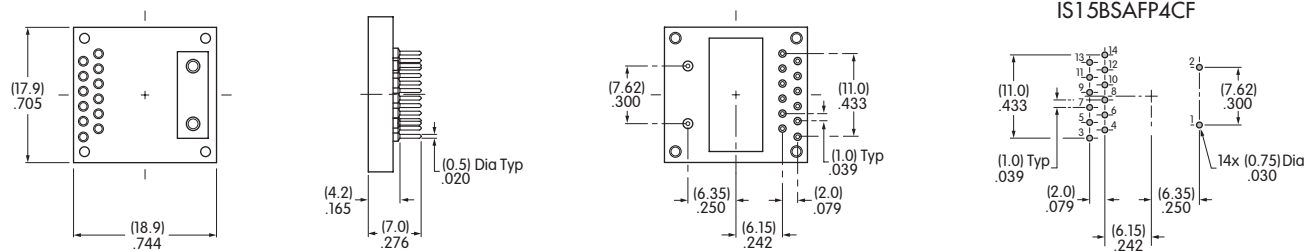

Compatible Part Numbers for AT9704-065F

LCD 64 x 32

IS15EBFP4RGB-09YN

LCD 64 x 32 Compact

IS15ESBFP4RGB

LCD 36 x 24

IS15BAFP4CF

LCD 36 x 24 Compact

IS15BSBFP4RGB

IS15BSAFP4CF

Note: AT9704-065F Socket may be used with the LCD 64 x 32 SmartDisplay by removing pins 3, 4, 11, 12, 13 and 14.