



COAXIAL

Termination, N-type M

KARN-50+

Mini-Circuits

50Ω DC to 8000 MHz

THE BIG DEAL

- Wideband coverage, DC to 8000 MHz
- Useable to 9000 MHz (return loss, 20 dB typ. at 9000 MHz)
- Rugged construction



Generic photo used for illustration purposes only

Model No.	KARN-50+
Case Style	LL718
Connectors	N-Type-Male

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

APPLICATIONS

- Cellular communications
- Satellite communications
- Defense communications
- Test set-up

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		8	GHz
Impedance		50			Ohms
Return Loss	DC - 0.5	30	—	—	dB
	DC - 1	30	—	—	
	DC - 2	29	—	—	
	DC - 5	27	—	—	
	DC - 8	20	—	—	
Power Rating*	DC - 8	—	—	2	W

*At 70°C, derate linearly at 0.025W/°C at 100°C.

MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	-55°C to 100°C
Storage temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

REV. F
ECO-012138
KARN-50+
MCL NY
220301






COAXIAL

Termination, N-type M

KARN-50+

OUTLINE DRAWING

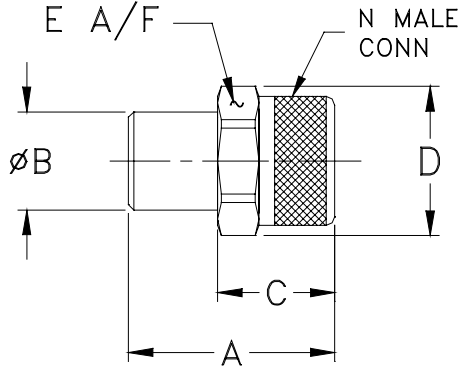

OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	wt
1.18	0.56	0.67	0.85	0.787	grams
29.97	14.22	17.02	21.59	19.99	30.0



To order KARN-50+ with 3½ length chain and end coupling with .130" diameter mtg. hole, use part no. [KARN-50CN+](#). Price is \$14.95, Qty. (1-9)

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Return Loss (dB)
100	46.31
600	46.36
1000	44.26
2000	39.83
3000	37.27
4000	35.14
5000	33.72
6000	34.35
7000	34.72
8000	34.96

