

# LDB75

## LED Power Supply

Constant Voltage /Current

### LDB Series

#### FEATURES

- **Universal Input: 90-305VAC**
- **Constant Voltage/Current**
- **High Efficiency 91%**
- **Class II**
- **IP67 rated**
- **Class 2 device (UL1310)**
- **Power Factor: Typical 0.95**
- **OCV, OVP, SCP, OTP**
- **5 Year Warranty**



LED Power  
75W

The LDB75 series of constant voltage/current LED power supplies can deliver up to 75W output power in an extremely compact package size.

The LDB75 can deliver constant voltage/current 24V, 36V and 48V outputs in a compact package. At only 28.5mm high, the LDB75 offers the lowest profile LED driver solution. Furthermore, the LDB75 can operate as a constant current driver delivering the maximum output current range over the defined voltage range.

Model Number	Output Voltage in Constant Voltage Mode	Output Current Range in Constant Voltage Mode	Output Voltage Range in Constant Current Mode	Output Current in Constant Current Mode	Efficiency
LDB75-024SW	24V	0 - 3.125A	12 - 24V	3.125A	90.0%
LDB75-036SW	36V	0 - 2.083A	18 - 36V	2.083A	90.5%
LDB75-048SW	48V	0 - 1.56A	24 - 48V	1.56A	91.0%

Input Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
<b>Input Voltage Range</b>	Universal Input	90		305	VAC
<b>Input Frequency Range</b>		47		63	Hz
<b>Input Current</b>	240VAC, 75W			0.45	A
<b>Inrush Current</b>	240VAC in, 25°C, Cold Start			45	A
<b>Power Factor</b>	240VAC, 100VAC		0.95		
Output Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
<b>Line Regulation</b>				±0.5	%
<b>Load Regulation</b>				±1.5	%
<b>Voltage Accuracy</b>	% of Vout			±2.0	%
<b>Voltage Range</b>	See individual models				
<b>Current Regulation</b>	Across Model Voltage Range			±3.0	%
<b>Ripple and Noise</b>	20MHz Bandwidth. See Note 1			2.0	% pk-pk
<b>Turn-on Delay</b>	Measured at 200VAC and full load			0.5	s
<b>Hold Up Time</b>		15			ms
<b>Overload Protection</b>		77		85	W
<b>Short Circuit Protection</b>	Auto Recovery				
<b>Over Voltage Protection</b>	Auto Recovery	105%		135%	V
<b>Over Temp Protection</b>	Auto Recovery, Case Temperature Range	85	92	100	°C
General Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
<b>Isolation Voltage</b>	Input to Output	3750			VAC
	Input to Chassis	3750			VAC
<b>Efficiency</b>	See individual models				
<b>Safety Agency Approvals</b>	UL8750, UL1310, CSA C22.2 No.223 Designed to meet EN61347-2-13, EN61347-1				
<b>No load Power Dissipation</b>	Measured at 100VAC and 240VAC			1.5	W
<b>MTBF</b>	Telecordia SR-33, Full Load, 25°C		1,000,000		Hours
<b>Lifetime</b>	T case = 60°C		100,000		Hours
<b>Weight</b>			0.66		Kg
<b>Operating Temperature</b>	Maximum T case = 80°C. See Note 2	-30		+50	°C
<b>Storage Temperature</b>		-40		+85	°C
<b>Relative Humidity</b>	Non-condensing (operating)	5		95	%RH
<b>Altitude</b>	Operating, Non Operating 10,000m			2000	m
<b>Vibration</b>	5-500Hz, random vibration			1.0	Grms
<b>Shock</b>	Half-Sine, 11ms duration			10	Grms
<b>Dimensions</b>	L x H x W: 231.0 x 28.4 x 40.0mm				

Note 1. Output connected in parallel with 0.1uF ceramic capacitor and 10uF electrolytic capacitor.  
 Note 2. Maximum allowable case temperature is 80°C

Specifications are subject to change without notice



#### Europe/Asia

Excelsys Technologies Ltd t: +353 21 4354716  
 27 Eastgate Drive f: +353 21 4354864  
 Eastgate Business Park e: sales@excelsys.com  
 Little Island, Cork, Ireland  
 IRELAND

#### North America

Excelsys Technologies t: (972) 771 4544  
 519 Interstate 30, #309 f: (972) 421 1805  
 Rockwall, TX 75087 e: salesusa@excelsys.com  
 USA

EMC				
Parameter	Standard Tested To		Level	Units
<b>Emissions</b>				
<b>Conducted</b>	EN55015, EN55022 Class B		Compliant	
<b>Radiated</b>	EN55015, EN55022 Class B		Compliant	
<b>Harmonic Distortion</b>	EN61000-3-2, Class C		Compliant	
<b>Flicker and Fluctuation</b>	EN61000-3-3		Compliant	
<b>Immunity</b>				
<b>ESD</b>	EN61000-4-2		Level 4	
<b>Radiated RFI</b>	EN61000-4-3		Level 3	
<b>Fast Transients - burst</b>	EN61000-4-4		Level 4	
<b>Input Line Surges</b>	EN61000-4-5		Level 4	
<b>Conducted RFI</b>	EN61000-4-6		Level 3	
<b>Power Freq Magnetic Field</b>	EN61000-4-8		Compliant	
<b>Voltage Dips</b>	EN61000-4-11		Criterion B	

## INPUT / OUTPUT WIRING


### INPUT CABLE

Black (L) and White(N) 300±20mm  
18AWG

### OUTPUT CABLE

Red (+V) and Black (-V) 300±20mm  
18AWG

## MECHANICAL SPECIFICATIONS

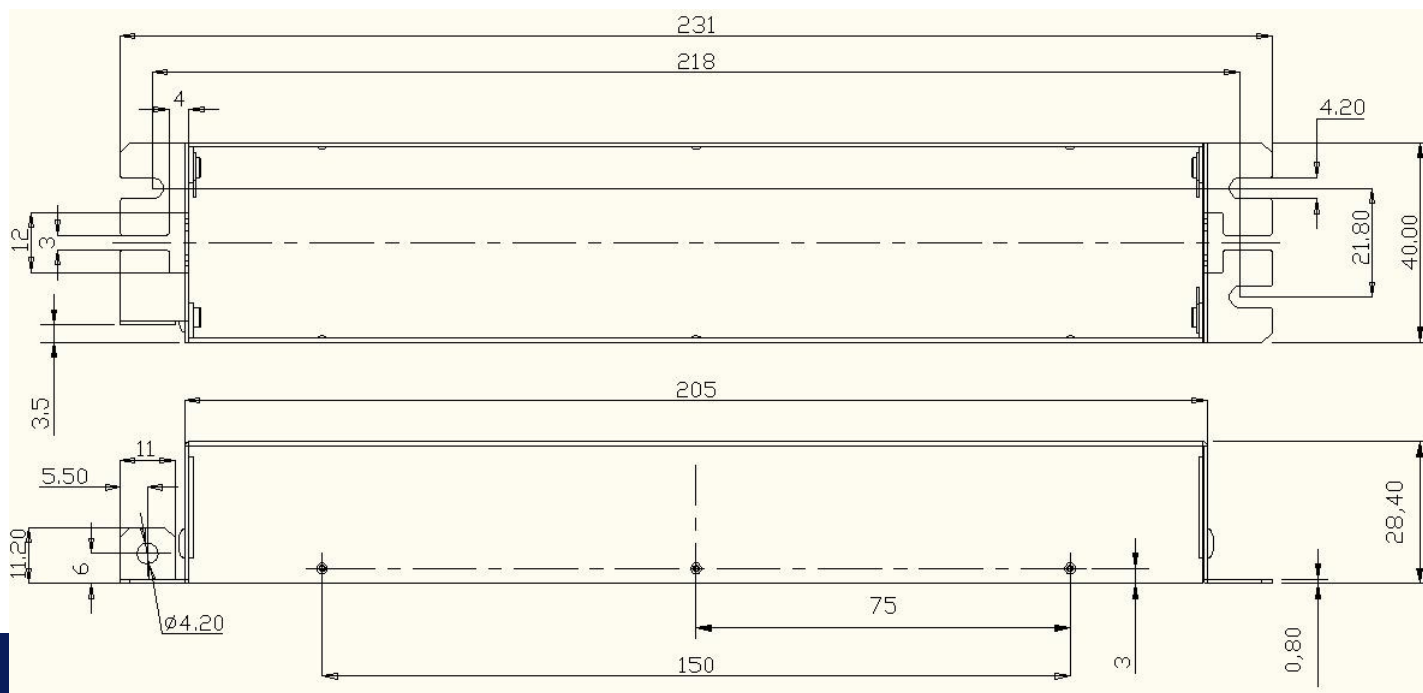

2

Specifications are subject to change without notice



LDB75 Preliminary Datasheet 24 FEB 2012

### Europe/Asia


Excelsys Technologies Ltd t: +353 21 4354716  
27 Eastgate Drive f: +353 21 4354864  
Eastgate Business Park e: sales@excelsys.com  
Little Island, Cork, Ireland  
IRELAND

### North America


Excelsys Technologies t: (972) 771 4544  
519 Interstate 30, #309 f: (972) 421 1805  
Rockwall, TX 75087 e: salesusa@excelsys.com  
USA

**EFFICIENCY CURVES**

**Efficiency under Constant Voltage**

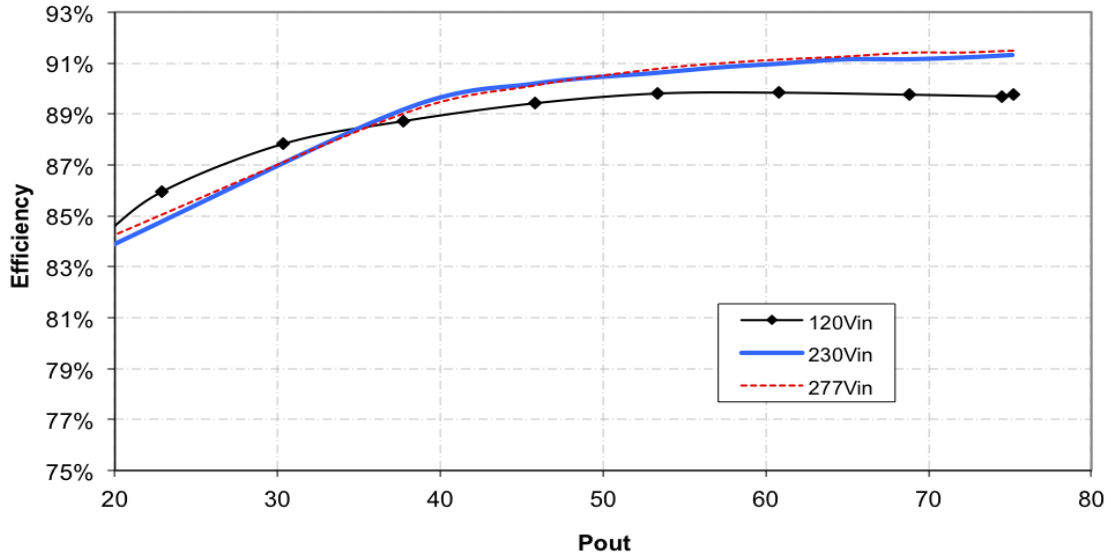

**Efficiency under Constant Current**

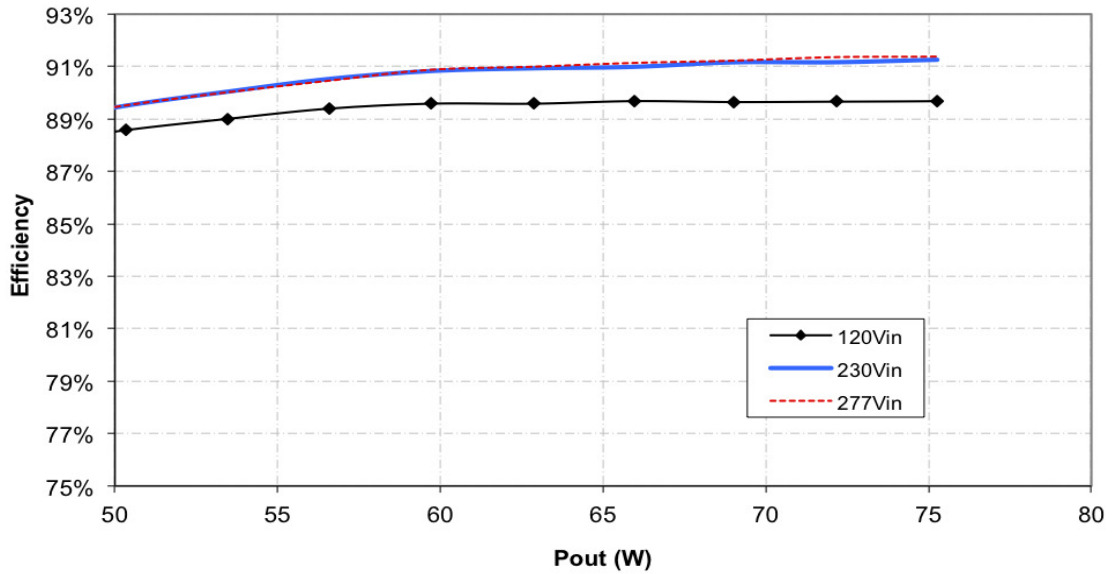



Specifications are subject to change without notice



<b>Europe/Asia</b>		<b>North America</b>	
Excelsys Technologies Ltd	t: +353 21 4354716	Excelsys Technologies	t: (972) 771 4544
27 Eastgate Drive	f: +353 21 4354864	519 Interstate 30, #309	f: (972) 421 1805
Eastgate Business Park	e: sales@excelsys.com	Rockwall, TX 75087	e: salesusa@excelsys.com
Little Island, Cork, Ireland		USA	
IRELAND			

**POWER FACTOR CHARACTERISTICS**

**LED Power  
75W**

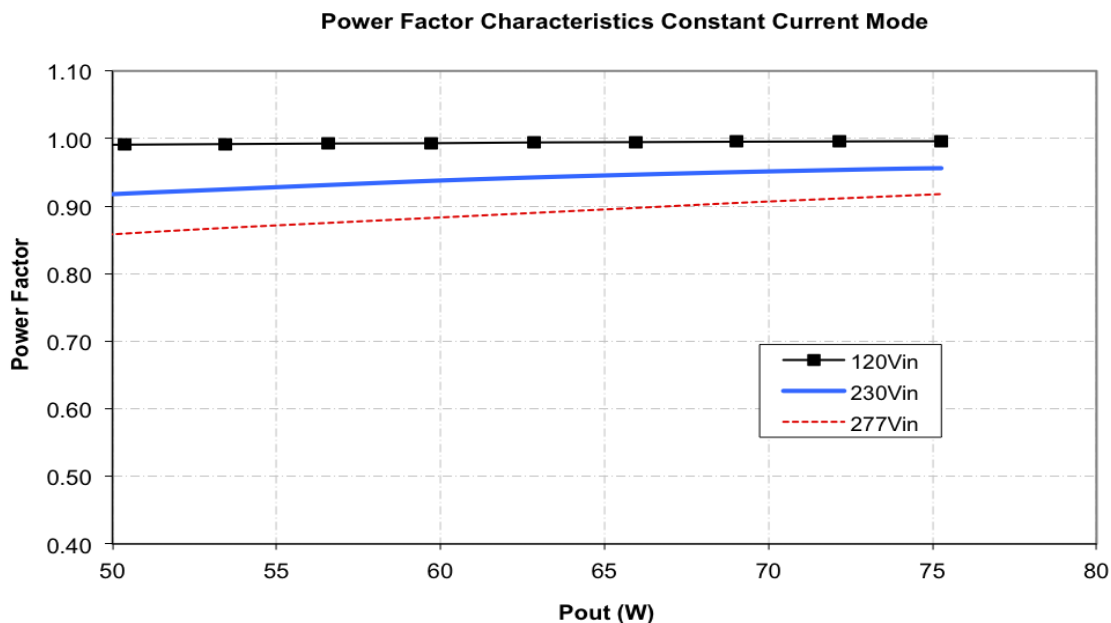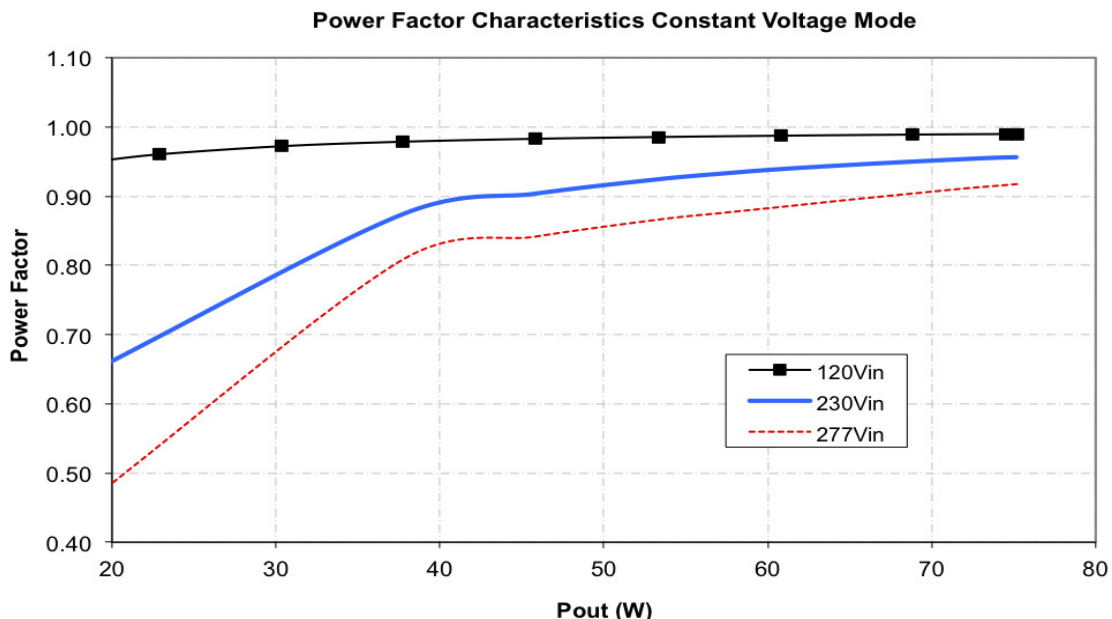


Specifications are subject to change without notice



<b>Europe/Asia</b>		<b>North America</b>	
Excelsys Technologies Ltd	t: +353 21 4354716	Excelsys Technologies	t: (972) 771 4544
27 Eastgate Drive	f: +353 21 4354864	519 Interstate 30, #309	f: (972) 421 1805
Eastgate Business Park	e: sales@excelsys.com	Rockwall, TX 75087	e: salesusa@excelsys.com
Little Island, Cork, Ireland		USA	
<b>IRELAND</b>			

Model Number	Output Voltage in Constant Voltage Mode	Output Current Range in Constant Voltage Mode	Output Voltage Range in Constant Current Mode	Output Current in Constant Current Mode
LDB75-024SW	24V	0 - 3.125A	12 - 24V	3.125A
LDB75-036SW	36V	0 - 2.083A	18 - 36V	2.083A
LDB75-048SW	48V	0 - 1.56A	24 - 48V	1.56A

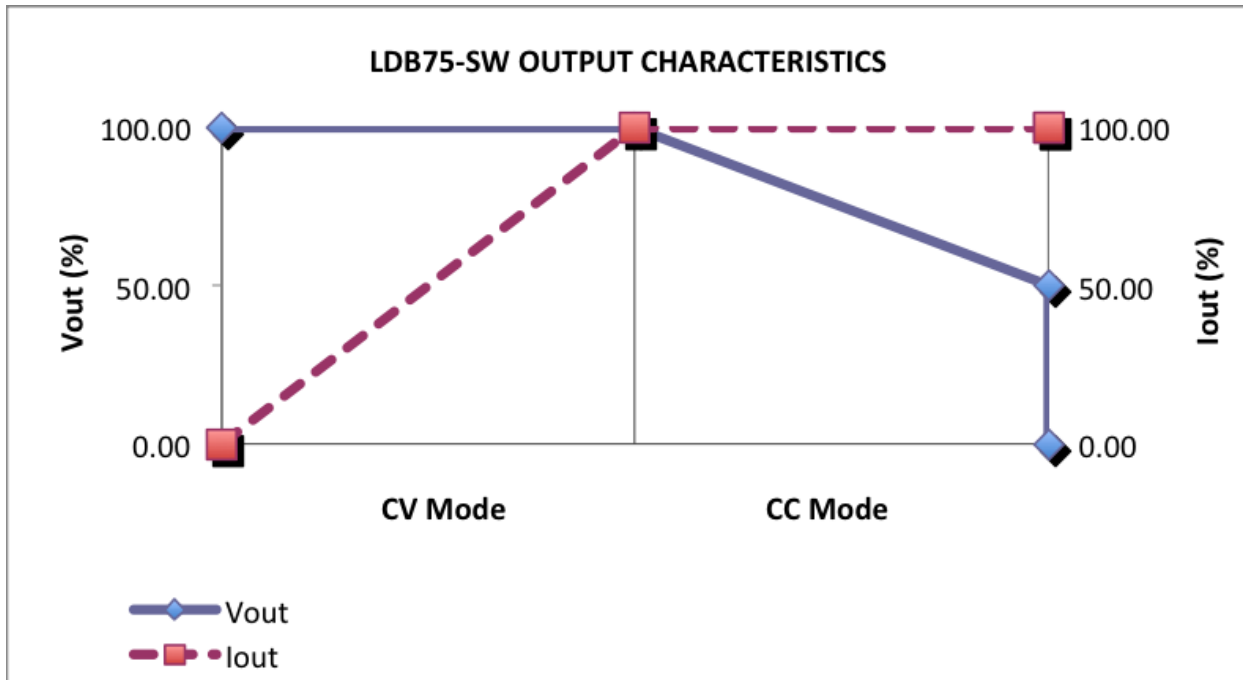

For more information on the Constant Voltage/Constant Current characteristics of the LDB75 series LED Driver see our LED Driver Application Note 1:

#### Driving LEDs & how to choose the correct LED power supply

On our website:

[http://www.excelsys.com/technical\\_support/application.html](http://www.excelsys.com/technical_support/application.html)