

MCL1204RRD1GR1T DATASHEET

Chip Type LED, 1204, Right Angle Lens, Red, Green




VENKEL LTD.

Part Number	Size	Emitting Color	Emitting Material	Lens-Color	Viewing Angle (2 θ 1/2)
MCL1204RRD1GR1T	1204	Red/Green	AllnGaP	Water Clear	120°


Electrical & Optical Specifactions (T _A =25°C)		Red	Green	Unit
Luminous Intensity (Min.)	I _v	28.5	28.5	mcd
Luminous Intensity (Typ.)	I _v	45.0	45.0	mcd
Forward Voltage (Min.) (I _F =5mA)	V _F	1.6	1.6	V
Forward Voltage (Max.) (I _F =5mA)	V _F	2.4	2.4	V
Reverse Current (Max) (V _R =5V)	I _R	<100	<100	uA
Peak Wavelength (Typ.) (I _F =5mA)	λ_P	639	573	nm
Dominant Wavelength (Typ.) (I _F =5mA)	λ_D	631	571	nm
Spectral Line Half Width (Typ.) (I _F =5mA)	$\Delta\lambda$	20	15	nm

Absolute Maximum Ratings (T _A =25°C)		Red	Green	Unit
Reverse Voltage	V _R	5		V
DC Forward Current	I _F	20		mA
Peak Forward Current 1/10 Duty Cycle @ 10KHz	1 _{FP}	40	40	mA
Power Dissipation	P _D	48	48	mW
Operating Temperature	T _A	-40 ~ +85		°C
Storage Temperature	T _{stg}	-40 ~ +100		

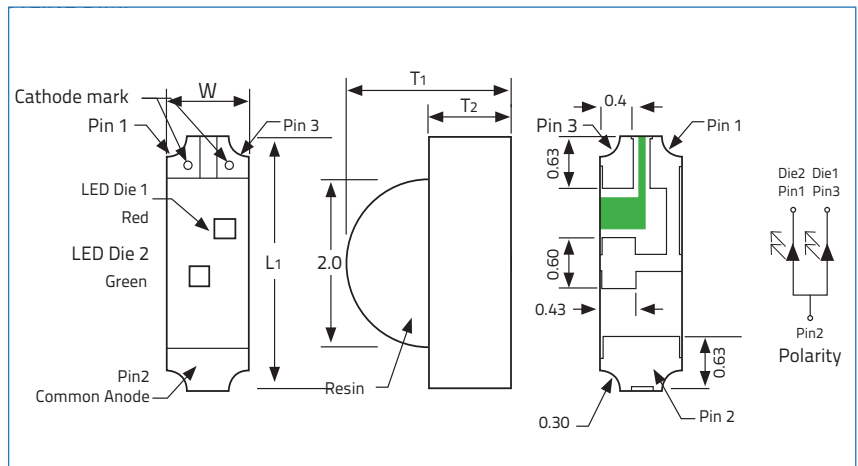

Dimensions		Units: Inches (mm)	
L ₁	W	T ₁	T ₂
0.1189±0.004 (3.0±0.1)	0.0394±0.004 (1.0±0.1)	0.0787±0.004 (2.0±0.1)	0.0394±0.004 (1.0±0.1)

Soldering Pad Layout

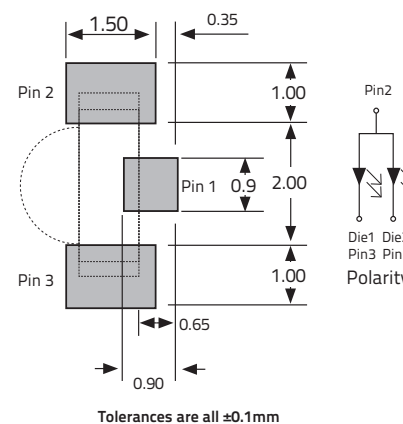

MCL1204RRD1GR1T DATASHEET

Chip Type LED, 1204, Right Angle Lens, Red, Green



VENKEL LTD.

Graphs

Fig.1 Forward Current vs Forward Voltage

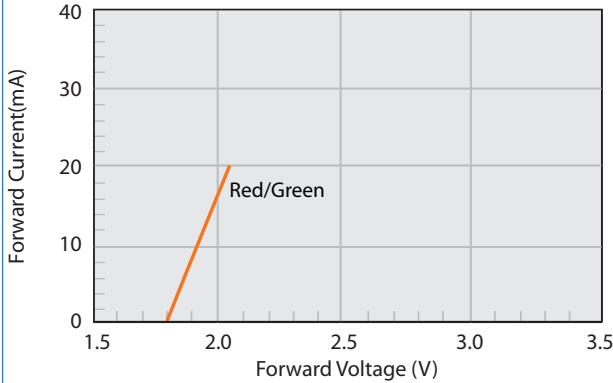


Fig.4 Relative Intensity vs Wavelength

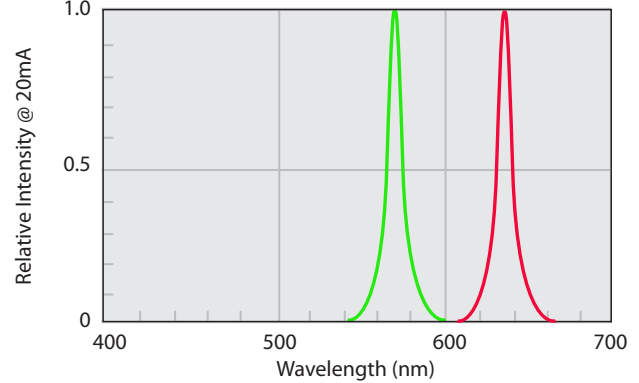


Fig.2 Relative Intensity vs Forward Current

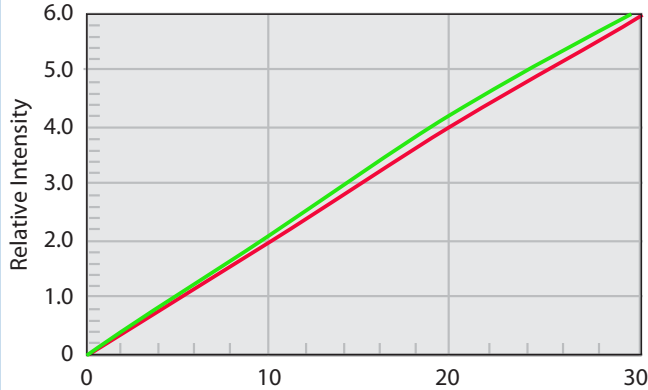


Fig. 5 Direct Radiation


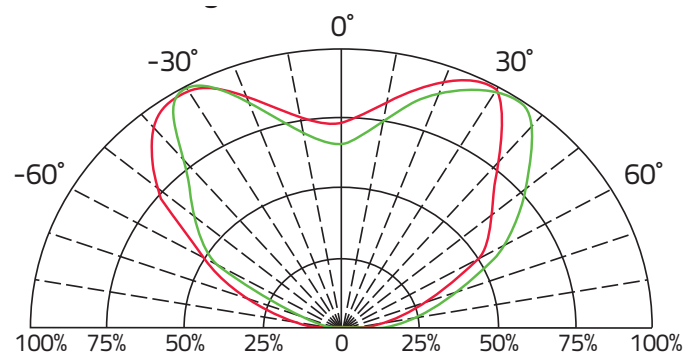


Fig.3 Current vs Temp

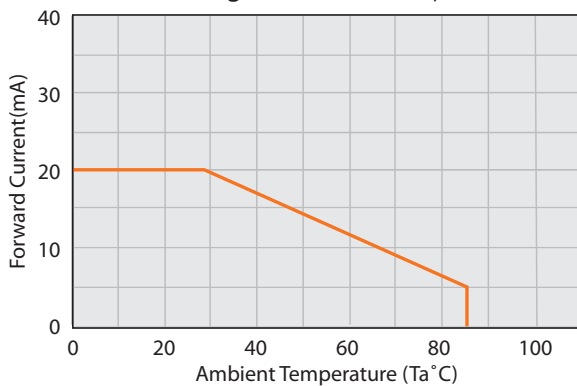

Environmental information

RoHS Status	6 of 6 Compliant
REACH Status	Compliant
Halogen Status	Halogen Free
Conflict Mineral Status	Conflict Mineral Free
Moisture Sensitivity Level (MSL)	3

Reflow profile

Max Reflow Temperature	260°C
Number of Reflow Cycles	2

MCL1204RRD1GR1T DATASHEET

Chip Type LED, 1204, Right Angle Lens, Red, Green



VENKEL LTD.

Label Example

Item: MCL1204RRD1GR1T
Chip Type LED,1204,Right Angle Lens,Red,Green
Qty: 3000 D/C: 1616

Lot: E1A1A22L12 VF: 1.6-2.4
BIN/HUE: N/BH-N/D VF: 1.6-2.4

VENKEL LTD
YOUR SINGLE SOURCE FOR SURFACE MOUNT PASSIVES

Codes:

VF: Forward Voltage | BIN: Luminous Intensity | HUE: Dominant Wavelength

Luminous Intensity Classification (BIN Code)

Red BIN Code	Iv(mcd) at 20mA	
	Min.	Max.
N	28.5	45
P	45	71.5
Q	71.5	112.5
R	112.5	180

Green BIN Code	Iv(mcd) at 20mA	
	Min.	Max.
N	28.5	45
P	45	71.5
Q	71.5	112.5
R	112.5	180

Dominant Wavelength Classification (HUE Code)

Red HUE Code	λD (nm) at 20mA	
	Min.	Max.
BH	620	650

Green HUE Code	λD (nm) at 20mA	
	Min.	Max.
C	567.5	570.5
D	570.5	573.5
E	573.5	576.5
F	576.5	579.5

MCL1204RRD1GR1T DATASHEET

Chip Type LED, 1204, Right Angle Lens, Red, Green



VENKEL LTD.

Reel Specifications		Units: mm		
M	C	F	E	G
178±1.50	56.0±1.0	12.0±1.0	60.0±1.0	9.0±1.0

Packaging Specifications	
Reel Size:	7"
Quantity per Reel :	3,000

Storage Specifications
1. Storage temperature and RH: 5°C~35°C, RH60%
2. Once the package is opened, the LEDs should be used within a week. Otherwise, they should be kept in a moisture proof bag with desiccant. We suggest that you use this product within one year from date code.
3. If opened for more than one week in an atmosphere of 5°C~35°C, RH60%. The parts should be heat treated at 60°C±5°C for 15 hours.

Tape Specifications		Units: mm		
T	W	A	B	F
1.2±0.10	8.0±0.3	3.2±0.10	2.2±0.10	3.5±0.05
E	H	J	D	G
1.75±0.1	4.0±0.1	2.0±0.05	1.5±0.1	4.0±0.1

MCL1204RRD1GR1T DATASHEET

Chip Type LED, 1204, Right Angle Lens, Red, Green



VENKEL LTD.

Environmental Test Criteria			
Classification	Test Item	Test Condition	Sample Size
Endurance Test	Operating Life	1. 25°C 2. 1000hrs	40
	High Temperature Storage	1. 85°C±5°C 2. 1000hrs	40
	Temperature, Humidity Bias	1. 40°C 2. 93% 3. 1000hrs	40
Environmental Test	Solderability	1. 245°C / 3±1 sec 2. 260°C / 10±1 sec	40