


			1		
	Part Number:		DRAWN	2/27/2010	
	MOOC	3001-4	CJ	3/27/2019	
	MOUD.		CHECKED	3/27/2019	
			C.H.		
	Description: Electret Conder	nser Microphone	APPROVED	3/27/2019	
			C.E.		

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


## Top View




Lead Wires

Connection Method

## Side View



## **Bottom View**

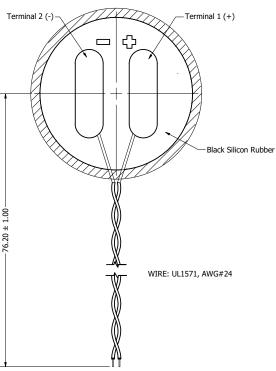

┪	Items	Specifications	Conditions	((	))			
	Directivity	Omnidirectional			ν   Δ			
	Sensitivity	-30	dB		<u> </u>			
	Frequency Range	100 ~ 8,000	Hz					
	Rated Voltage	2	V					
	Voltage Range	1 ~ 10	V	REVISION HISTORY				
	Output Impedance	2,200	Ω	REV	DESCRIPTION	DATE	APPROVED	
$\Gamma$	Max. Rated Current	500	uA		Released from Engineering	3/27/2019	C.E.	
^_	IP Rating	IP67		NOTES				
	Storage Temperature	-10 ~ +60	°C		All dimensions are in mm unless otherwise noted			
	Operating Temperature	-10 ~ +60	°C		2) All tolerances are ± 0.5 mm unless otherwise noted			
	Signal to Noise Ratio	58	dB		3) All parts meet RoHS			
Г	Mount Type	Flush Mount			4) Subject to change or redrawn without notice			