

# FOC-FDX20-PP-STD6-MM - Distributor



1019681

<https://www.phoenixcontact.com/us/products/1019681>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distributor, design: Rail-mountable module, degree of protection: IP20, material: Sheet steel, connection method: Cable gland M20, cable outlet: above and below, housing size: 1, color: traffic grey A RAL 7042

## Product description

FDX 20 series DIN rail distributor box without pigtails, assembled with 6x ST/SC duplex coupling (hybrid), multimode made from metal. Splice holder for separately available shrink and crimp splicing protection, on a patented splice comb made from powder-coated sheet steel. Cable insertion possible via cable gland from above or below.

Housing, 2-part, prepared for DIN rail mounting through the rear-side adapter. The adapter can also be mounted on the side.

Scope of supply:

DIN rail housing with integrated splice comb (mounted), assembled with 6x ST/SC duplex coupling (hybrid), 1x splice holder, 1x cable gland (M20x1.5)

## Your advantages

- Intuitive front-panel operation and clear control cabinet layout thanks to uniform design
- Flexible DIN rail mounting possible in six positioning directions
- Suitable for industrial applications
- Reduced installation time with plug-and-play
- Pin assignment straight in line in a link
- Continuously reliable data connection, thanks to extensively tested components
- Snap-on mounting on standard NS 35/7,5 or NS 35/15 DIN rails
- Transmission rate up to 1,000 Mbps

## Commercial data

Item number	1019681
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB15
Product key	ABNGAB
Catalog page	Page 381 (C-2-2019)
GTIN	4055626701165
Weight per piece (including packing)	801.9 g
Weight per piece (excluding packing)	772.5 g
Customs tariff number	85367000
Country of origin	DE

## Technical data

### Notes

General	Wire pigtails must be ordered separately
---------	--

### Product properties


Type	Rail-mountable module
Product type	Network distributor box
No. of cable outlets	2
Number of module slots	6
Number of slots	12
Type of the screw connection	M20 x 1.5
Protective cover	yes
Series	FDX 20 series
Cable outlet	above and below

### Connection data

#### Connection technology

Connection method	Cable gland M20
-------------------	-----------------

### Dimensions

Dimensional drawing	
Width	40 mm
Height	130 mm
Depth	115 mm

#### Housing

Housing width	40 mm
---------------	-------

#### Mechanical characteristics

Ferrule diameter	2.50 mm
------------------	---------

### Material specifications

Color	traffic grey A RAL 7042
Flammability rating according to UL 94	V0
Ferrule material	Zirconia ceramics
Housing surface material	Powder-coated, gray
Housing material	Sheet steel

### Cable/line

1019681

<https://www.phoenixcontact.com/us/products/1019681>

Cable type	Fiberglass
External cable diameter ( )	6 mm ... 12 mm
External cable diameter	≤ 12 mm (of 6 mm)
	6 mm ... 12 mm
Resistance to oil	no
Flame resistance	yes

## FO cable

Fiber	GOF
Fiber type	Multi-mode fiberglass
Transmission medium	FO

## Mechanical properties

## Mechanical data

Type of the screw connection	M20 x 1.5
Insertion/withdrawal cycles	≥ 500

## Environmental and real-life conditions

## Ambient conditions

Degree of protection	IP20 (according to IEC 60529)
	IP20
Ambient temperature (operation)	-40 °C ... 85 °C (Category OPhd+)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (assembly)	0 °C ... 50 °C
Resistance to oil	no

## Standards and regulations


Flame resistance	yes
Resistance to oil	no

## Mounting

Mounting type	DIN rail: 35 mm
Assembly instructions	Option for flexible replugging of DIN rail adapter
Connection method	Cable gland M20

## Drawings

Dimensional drawing

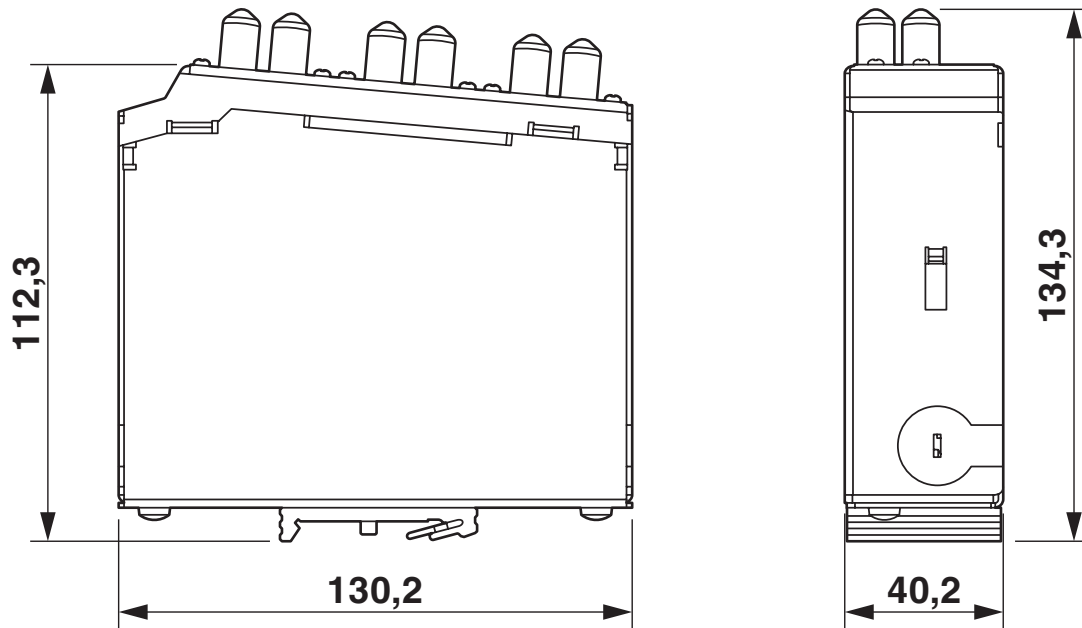

DIN rail distributor 6x ST duplex

1019681

<https://www.phoenixcontact.com/us/products/1019681>

## Classifications

### ECLASS

ECLASS-11.0	19170113
-------------	----------

### ETIM

ETIM 8.0	EC002699
----------	----------

### UNSPSC

UNSPSC 21.0	43223300
-------------	----------

1019681

<https://www.phoenixcontact.com/us/products/1019681>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

1019681

<https://www.phoenixcontact.com/us/products/1019681>

## Mandatory accessories

### FOC-SHRINKSPLICE-PROTECT - Shrink splice protection

1019676

<https://www.phoenixcontact.com/us/products/1019676>



Shrink splice protection, design: Straight, degree of protection: IP20, cable outlet: above and below, color: transparent

---

### FOC-CRIMPSPLICE-PROTECT - Crimp splice protection

1019678

<https://www.phoenixcontact.com/us/products/1019678>



Crimp splice protection, design: Straight, degree of protection: IP20, connection method: Crimp connection, cable outlet: above and below, color: Bare metallic

---

## Accessories

# FOC-FDX20-PP-STD6-MM - Distributor



1019681

<https://www.phoenixcontact.com/us/products/1019681>

## FOC-ST:PA-ST:PA-OM2:D01/1 - FO patch cable

1115560

<https://www.phoenixcontact.com/us/products/1115560>

Multi-mode OM2 duplex jumper, ST-ST, UPC polishing, length 1 m




---

## FOC-ST:PA-SC:PA-OM2:D01/1 - FO patch cable

1115574

<https://www.phoenixcontact.com/us/products/1115574>

Multi-mode OM2 duplex jumper, ST-SC, UPC polishing, length 1 m





# FOC-FDX20-PP-STD6-MM - Distributor



1019681


<https://www.phoenixcontact.com/us/products/1019681>

## FOC-LC:PA-ST:PA-OM2:D01/1 - Fiber optic cable

1115588

<https://www.phoenixcontact.com/us/products/1115588>

Multi-mode OM2 duplex jumper, LC-ST, UPC polishing, length 1 m



---

## FOC-ST:PA-ST:PA-OM1:D01/1 - FO patch cable

1146501

<https://www.phoenixcontact.com/us/products/1146501>

Multi-mode OM1 duplex jumper, ST-ST, UPC polishing, length 1 m



# FOC-FDX20-PP-STD6-MM - Distributor



1019681


<https://www.phoenixcontact.com/us/products/1019681>

## FOC-LC:PA-ST:PA-OM1:D01/1 - FO patch cable

1146499

<https://www.phoenixcontact.com/us/products/1146499>

Multi-mode OM1 duplex jumper, LC-ST, UPC polishing, length 1 m



---

## FOC-PT9:SC-OM1/2.5 - Fiber optic cable

1208107

<https://www.phoenixcontact.com/us/products/1208107>

Fiber optic cable, design: LC, degree of protection: IP20, cable length: 2.5 m, number of positions: 12, connection method: SC, cable outlet: straight, color: beige



# FOC-FDX20-PP-STD6-MM - Distributor



1019681


<https://www.phoenixcontact.com/us/products/1019681>

## FOC-PT9:SC-OM2/2.5 - Fiber optic cable

1208109

<https://www.phoenixcontact.com/us/products/1208109>

Fiber optic cable, design: SC, degree of protection: IP20, cable length: 2.5 m, number of positions: 12, connection method: SC, cable outlet: straight, color: beige



---

## FOC-OE-OE-GMB-U-OM4-12/... - FO cable

1286209

<https://www.phoenixcontact.com/us/products/1286209>



GOF universal cable; 12-wire, mini breakout cable for fixed installation; non-metal rodent protection; can be stripped easily; UV resistant; high mechanical and thermal stability; low smoke; halogen-free and self-extinguishing; improved impact resistance; longitudinally and transversely watertight

1019681

<https://www.phoenixcontact.com/us/products/1019681>

## FOC-OE-OE-GL-U-OM4-12/... - FO cable

1286220

<https://www.phoenixcontact.com/us/products/1286220>



GOF universal cable; 12-wire, loose tube cable for fixed installation; non-metal rodent protection; can be stripped easily; UV resistant; high mechanical and thermal stability; low smoke; halogen-free and self-extinguishing; improved impact resistance; longitudinally and transversely watertight

---

## FOC-OE-OE-GL-U-OM3-12/... - FO cable

1286221

<https://www.phoenixcontact.com/us/products/1286221>



GOF universal cable; 12-wire, loose tube cable for fixed installation; non-metal rodent protection; can be stripped easily; UV resistant; high mechanical and thermal stability; low smoke; halogen-free and self-extinguishing; improved impact resistance; longitudinally and transversely watertight

1019681

<https://www.phoenixcontact.com/us/products/1019681>

## FOC-OE-OE-GL-U-OM2-12/... - FO cable

1286222

<https://www.phoenixcontact.com/us/products/1286222>



GOF universal cable; 12-wire, loose tube cable for fixed installation; non-metal rodent protection; can be stripped easily; UV resistant; high mechanical and thermal stability; low smoke; halogen-free and self-extinguishing; improved impact resistance; longitudinally and transversely watertight

---

## FOC-OE-OE-GL-U-OM1-12/... - FO cable

1286223

<https://www.phoenixcontact.com/us/products/1286223>



GOF universal cable; 12-wire, loose tube cable for fixed installation; non-metal rodent protection; can be stripped easily; UV resistant; high mechanical and thermal stability; low smoke; halogen-free and self-extinguishing; improved impact resistance; longitudinally and transversely watertight

# FOC-FDX20-PP-STD6-MM - Distributor



1019681

<https://www.phoenixcontact.com/us/products/1019681>

## FOC-ST:A-ST:A-GZ01/... - FO patch cable

1405712

<https://www.phoenixcontact.com/us/products/1405712>



Assembled FO cable, zip cord cable, multi-mode fiberglass 50/125  $\mu\text{m}$ , OM2, plug: B-FOC (ST)/B-FOC (ST), degree of protection: IP20, for installation in cable ducts or control cabinets

---

## FOC-ST:A-ST:A-GZ04/... - FO patch cable

1413821

<https://www.phoenixcontact.com/us/products/1413821>



Assembled FO cable, zip cord cable, multi-mode fiberglass 62.5/125  $\mu\text{m}$ , OM1, connector: B-FOC (ST)/B-FOC (ST), degree of protection: IP20, for installation in cable ducts or control cabinets

## FOC-FDX20-PP-STD6-MM - Distributor

1019681

<https://www.phoenixcontact.com/us/products/1019681>



### FOC-TOOL-FERRULECLEANER-2.50 - FO accessories

1407029

<https://www.phoenixcontact.com/us/products/1407029>

2.50 mm ferrule cleaner, for ST, SC, FC, E2000 (also APC), approx. 500 cleaning cycles



---

### FOC-TOOL-STICKCLEANER-2.50 - FO accessories

1407002

<https://www.phoenixcontact.com/us/products/1407002>

Stick cleaner for couplings and plug end faces, 2.50 mm (ST, SC), Pcs. / Pkt.: 10



# FOC-FDX20-PP-STD6-MM - Distributor



1019681

<https://www.phoenixcontact.com/us/products/1019681>

## A-INSP-M20-68N-P-LG - Screw plug

1424519

<https://www.phoenixcontact.com/us/products/1424519>

Screw plug, material for screw connection: PA, connecting thread: M20 x 1.5, color: lightgrey RAL 7035, with O-ring



---

## WP-CN PA M20 - Nut

3241134

<https://www.phoenixcontact.com/us/products/3241134>

Nut, for threads M20, color: gray





# FOC-FDX20-PP-STD6-MM - Distributor



1019681

<https://www.phoenixcontact.com/us/products/1019681>

## SF-PH 1-80 - Screwdriver

1212559

<https://www.phoenixcontact.com/us/products/1212559>



Screwdriver, PH crosshead (lasered), uninsulated, size: PH 1 x 80, 2-component grip, with non-slip grip

---

## SF-SL 1,0X5,5-150 - Screwdriver

1212552

<https://www.phoenixcontact.com/us/products/1212552>



Screwdriver, bladed (lasered), size: 1.0 x 5.5 x 150 mm, 2-component grip, with non-slip grip

1019681


<https://www.phoenixcontact.com/us/products/1019681>

## E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



---

## NBC-PP-G1PGY - DIN rail adapter

1041740

<https://www.phoenixcontact.com/us/products/1041740>

DIN rail adapter, design: Headers with shielding, degree of protection: IP20, material: PC-GF10, connection method: Quick connection, without assembled modules



# FOC-FDX20-PP-STD6-MM - Distributor



1019681

<https://www.phoenixcontact.com/us/products/1019681>

## FL DIN RA - DIN rail adapter

2891053

<https://www.phoenixcontact.com/us/products/2891053>

The FL DIN RA is installed in a standard, 19-inch rack (EIA-310-D, IEC 60297-3-100) to allow DIN rail mounted equipment to be rack mounted.



---

## G-INS-M20-S68N-PNES-GY - Cable gland

1411125

<https://www.phoenixcontact.com/us/products/1411125>

Cable gland, material for screw connection: PA, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver-grey RAL 7001



1019681

<https://www.phoenixcontact.com/us/products/1019681>

## TML (104X10)R - Marker strip

0801835

<https://www.phoenixcontact.com/us/products/0801835>



Marker strip, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: adhesive, for terminal block width: 104 mm, lettering field size: 104 x 10 mm, Number of individual labels: 1500

---

## TML (EX9,5)R TR - Marker strip

0816634

<https://www.phoenixcontact.com/us/products/0816634>



Marker strip, Roll, transparent, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: adhesive, for terminal block width: 30000 mm, lettering field size: 40000 x 9.5 mm, Number of individual labels: 1

1019681

<https://www.phoenixcontact.com/us/products/1019681>

## EMLS (70X32)R SR - Safety label with special adhesive

0800346

<https://www.phoenixcontact.com/us/products/0800346>



Safety label with special adhesive, Roll, silver, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, lettering field size: 70 x 32 mm, Number of individual labels: 500

---

## EML-HA (76X51)R - Label for rough surfaces

0830609

<https://www.phoenixcontact.com/us/products/0830609>



Label for rough surfaces, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, lettering field size: 76 x 51 mm, Number of individual labels: 1000

1019681

<https://www.phoenixcontact.com/us/products/1019681>

## PML-W100 (25X25)R - Warning label

0830429

<https://www.phoenixcontact.com/us/products/0830429>



Warning label, Roll, yellow/black, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, diameter: 0 mm, lettering field size: 25 x 25 mm, Number of individual labels: 500

---

## LS-EMLP (60X15) WH - Device marker

0831696

<https://www.phoenixcontact.com/us/products/0831696>



Device marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, mounting type: adhesive, lettering field size: 60 x 15 mm, Number of individual labels: 20

# FOC-FDX20-PP-STD6-MM - Distributor



1019681

<https://www.phoenixcontact.com/us/products/1019681>

## WML-RFID/HF 14 (25X19)R - Cable marker

0803386

<https://www.phoenixcontact.com/us/products/0803386>



Cable marker label with RFID-HF transponder, roll, white, unmarked, can be printed with: THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK X1.2, mounting type: adhesive, min. cable diameter: 9 mm, max. cable diameter: 14 mm, lettering field size: 25 x 19 mm

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)