

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header



1197599
<https://www.phoenixcontact.com/us/products/1197599>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator box header, application: Standard, connection method: M8 socket Metal, number of slots: 4, number of positions: 3, coding: A, slot assignment: single, status display: Yes, pnp; master cable connection: Plug-in master cable connection 180°, shielding: no

Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Convenient: increased machine availability thanks to quick and easy diagnostics
- Flexible: distributor box with connector hood for on-site assembly

Commercial data

Item number	1197599
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF40
Product key	BF3BCD
GTIN	4063151258009
Weight per piece (including packing)	94.7 g
Weight per piece (excluding packing)	94 g
Customs tariff number	85444290
Country of origin	DE

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box
header



1197599

<https://www.phoenixcontact.com/us/products/1197599>

Technical data

Notes

General	<p>NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.</p>
General	<p>Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".</p>

Product properties

Product type	Header with metric measurement slots
Number of positions	3
Application	Standard
Number of slots	4
Coding	A
LED	yes

System properties

Local diagnostics

Monitored function	Supply voltage
Optical representation	Green LED


Electrical properties

Max. operating voltage U_{\max}	30 V DC
Local diagnostics	Supply voltage Green LED
	Status display I/O Yellow LED
Nominal voltage U_N	24 V DC
Rated current, total	8 A
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	2 A

Signaling

Status display present	Yes
------------------------	-----

Dimensions

<p>Dimensional drawing</p>	 <p>Technical drawing of the 30 mm wide sensor unit. The drawing includes two views: a top view and a side view. The top view shows a rectangular unit with a width of 30 mm and a height of 20 mm. It features a display screen on the left, a speaker grille in the center, and four circular sensors on the right. The distance between the center of the two outer sensors is 57 mm, and the distance between the center of the two inner sensors is 11 mm. The total width of the sensor array is 33 mm. The side view shows a depth of 4.7 mm and a total length of 134 mm. The distance between the center of the two outer sensors is 125 mm. The diameter of the mounting holes is Ø4.2 mm.</p>
<p>Width</p>	<p>30 mm</p>

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header



1197599

<https://www.phoenixcontact.com/us/products/1197599>

Height	17 mm
Length	134 mm

Material specifications

Material	Cu alloy
	PBT
	PUR
Seal material O-ring	FKM
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PBT
Material of contact, master cable side	CU alloy
Material of the contact carrier on the master cable side	PA
Material of contact surface, master cable side	tin-plated

Cable/line

Sensor/actuator connection system	M8 socket
Connection method	Plug-in master cable connection
Tightening torque, cover screw	1 Nm
Tightening torque of mounting screw for fixing the housing	0.8 Nm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 80 °C

Standards and regulations

Standard designation	M8 connector
Standards/specifications	IEC 61076-2-104

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header




1197599

<https://www.phoenixcontact.com/us/products/1197599>

Drawings

Dimensional drawing

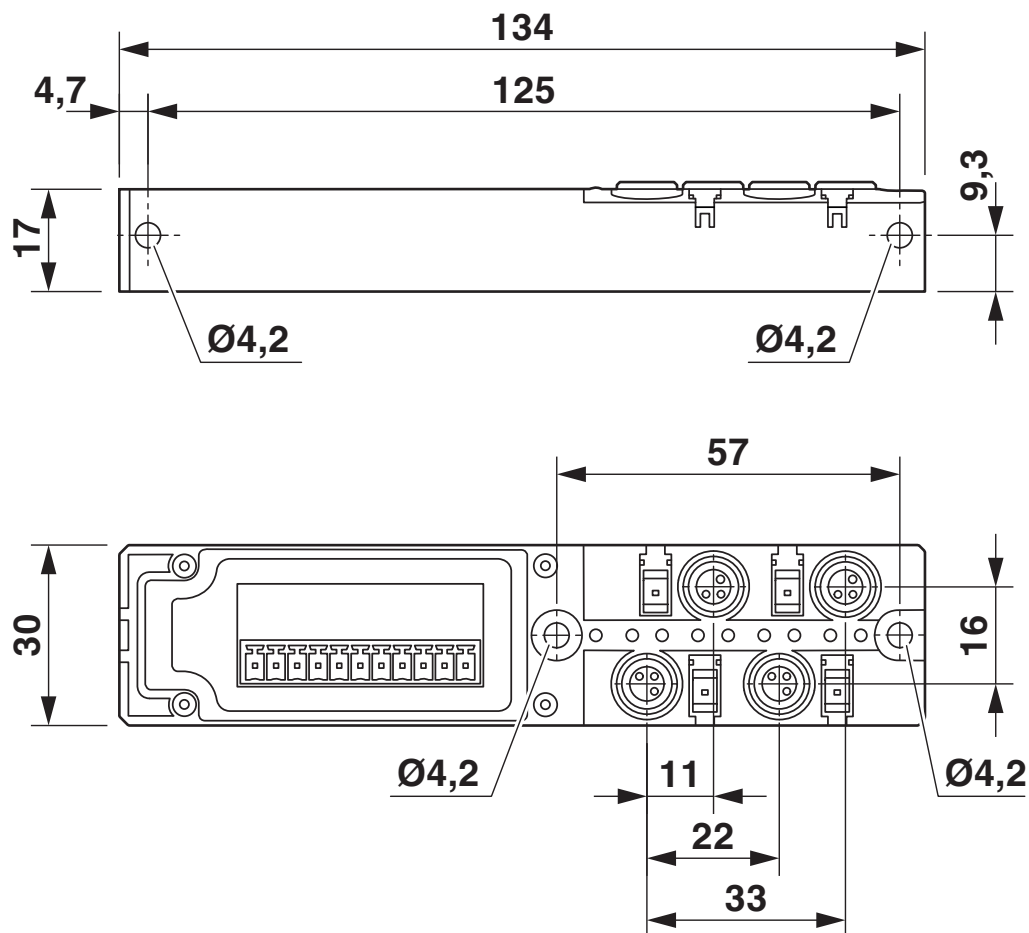


SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header


1197599

<https://www.phoenixcontact.com/us/products/1197599>

Circuit diagram

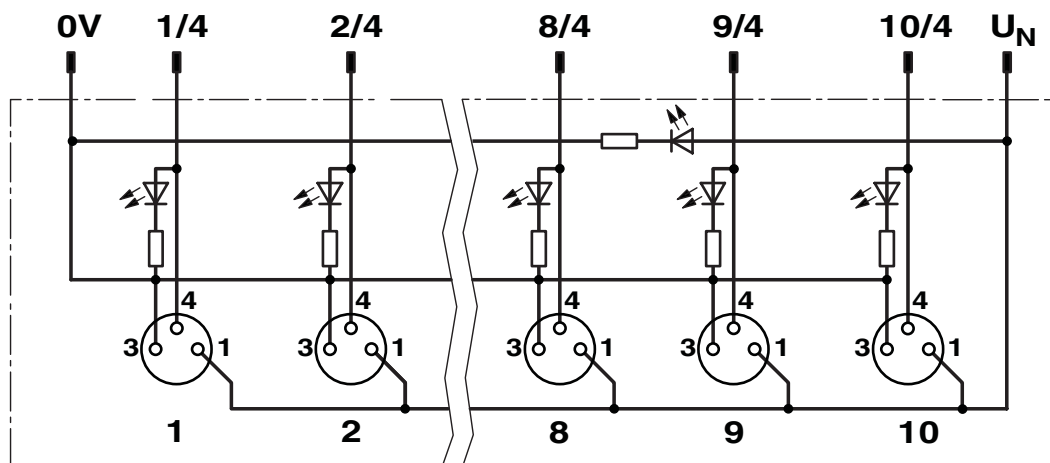

Schematic diagram

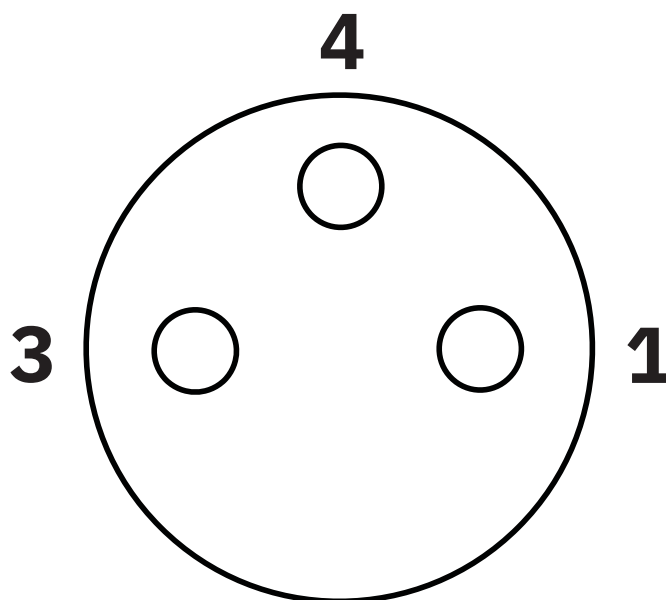

M8 slot, socket, 3-pos.

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header



1197599

<https://www.phoenixcontact.com/us/products/1197599>

Classifications

ECLASS

ECLASS-11.0	27440111
ECLASS-12.0	27440111
ECLASS-13.0	27440111

ETIM

ETIM 8.0	EC003558
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header



1197599
<https://www.phoenixcontact.com/us/products/1197599>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header



1197599

<https://www.phoenixcontact.com/us/products/1197599>

Mandatory accessories

SACB-PT-H180- 4/3-M8 HD - Connector hood

1197651

<https://www.phoenixcontact.com/us/products/1197651>



Connector hood, application: Standard, connection method: M8 socket Metal, number of slots: 4, number of positions: 3, slot assignment: single, status display: No, Universal; master cable connection: Plug-in push-in spring-cage connection 180°, shielding: no

SACB-C-H180- 4/3-M8 HD - Connector hood

1197637

<https://www.phoenixcontact.com/us/products/1197637>



Connector hood, application: Standard, connection method: M8 socket Metal, number of slots: 4, number of positions: 3, slot assignment: single, status display: No, Universal; master cable connection: Pluggable screw connection 180°, shielding: no

Accessories

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header



1197599

<https://www.phoenixcontact.com/us/products/1197599>

SACB-PT-H180- 4/3-M8 HD - Connector hood

1197651

<https://www.phoenixcontact.com/us/products/1197651>



Connector hood, application: Standard, connection method: M8 socket Metal, number of slots: 4, number of positions: 3, slot assignment: single, status display: No, Universal; master cable connection: Plug-in push-in spring-cage connection 180°, shielding: no

SACB-C-H180- 4/3-M8 HD - Connector hood

1197637

<https://www.phoenixcontact.com/us/products/1197637>



Connector hood, application: Standard, connection method: M8 socket Metal, number of slots: 4, number of positions: 3, slot assignment: single, status display: No, Universal; master cable connection: Pluggable screw connection 180°, shielding: no

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header



1197599

<https://www.phoenixcontact.com/us/products/1197599>

SACB- 4X0,34/2X0,75-50 PUR - Master cable ring

1517576

<https://www.phoenixcontact.com/us/products/1517576>



Master cable for sensor/actuator boxes, without PE conductor, unshielded, material PUR/PVC, 6-pos., 4 x 0.34 mm² and 2 x 0.75 mm², length: 50 m

UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/us/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header



1197599

<https://www.phoenixcontact.com/us/products/1197599>

PROT-M8 - Screw plug

1682540

<https://www.phoenixcontact.com/us/products/1682540>



An M8 screw plug for the unoccupied M8 sockets of the sensor/actuator cable, boxes and flush-type connectors

TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/us/products/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header



1197599

<https://www.phoenixcontact.com/us/products/1197599>

SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/us/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

SACC BIT M8-D12 - Tool

1208474

<https://www.phoenixcontact.com/us/products/1208474>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 12 mm, for 4 mm hexagonal drive

SACB- 4/3-L-C-M8 HD GG - Sensor/actuator box header



1197599

<https://www.phoenixcontact.com/us/products/1197599>

SZK PZ2 VDE - Screwdriver

1206463

<https://www.phoenixcontact.com/us/products/1206463>



Screwdriver, PZ crosshead, VDE insulated, size: PZ 2 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com