


SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable



1406243

<https://www.phoenixcontact.com/us/products/1406243>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 4-position, PVC, yellow, free cable end, on Socket angled M8, coding: A, cable length: 2 m

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1406243 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF13 |
| Product key | BF1IAB |
| GTIN | 4046356798082 |
| Weight per piece (including packing) | 60 g |
| Weight per piece (excluding packing) | 60 g |
| Customs tariff number | 85444290 |
| Country of origin | US |

SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable



1406243

<https://www.phoenixcontact.com/us/products/1406243>

Technical data

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Number of positions | 4 |
| Application | Standard, U.S. cables |
| No. of cable outlets | 1 |
| Shielded | no |
| Coding | A |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |
| Outer sheath, material | PVC |

Electrical properties

| | |
|-----------------------|----------------------------|
| Contact resistance | $\leq 5 \text{ m}\Omega$ |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 48 V AC |
| | 60 V DC |
| Nominal current I_N | 4 A |
| Protective circuit | unwired |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Signaling

| | |
|------------------------|----|
| Status display | No |
| Status display present | No |

Connection data

Conductor connection

| | |
|-------------------|------------------------|
| Tightening torque | 0.2 Nm (M8 connectors) |
|-------------------|------------------------|

SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable



1406243

<https://www.phoenixcontact.com/us/products/1406243>

Connector

Connection 1

| | |
|------|----------------|
| Type | free cable end |
|------|----------------|


Connection 2

| | |
|---------------------|------------------|
| Type | Socket angled M8 |
| Number of positions | 4 |
| Coding type | A |
| Number of positions | 4 |

Cable/line

| | |
|--------------|-----|
| Cable length | 2 m |
|--------------|-----|

PVC yellow 105 °C [542]

| | |
|---|---|
| Dimensional drawing |  |
| Cable weight | 25 kg/km |
| UL AWM Style | 2517 (105 °C / 300 V) |
| Number of positions | 4 |
| Shielded | no |
| Cable type | PVC yellow 105 °C [542] |
| Conductor structure signal line | 32x 1.10 mm |
| AWG signal line | 24 |
| Wire diameter incl. insulation | 1.12 mm ±0.03 mm |
| External cable diameter | 4.4 mm ±0.2 mm |
| Outer sheath, material | PVC |
| External sheath, color | yellow |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | PVC |
| Single wire, color | brown, blue, black, white |
| Overall twist | 4 wires, twisted |
| Max. conductor resistance | max. 79.7 Ω/km (20 °C) |
| Insulation resistance | ≥ (550 M Ohms/m @ 500V) |
| Nominal voltage, cable | 300 V |
| Minimum bending radius, flexible installation | 8 x D |
| Flame resistance | FT4 |
| Other resistance | UV resistant |

SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable



1406243

<https://www.phoenixcontact.com/us/products/1406243>

| | |
|---------------------------------|---|
| Ambient temperature (operation) | -30 °C ... 105 °C (cable, fixed installation) |
| | -5 °C ... 105 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Degree of protection | IP65 |
| | IP67 |
| | IP68 |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| | -40 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (Cable, flexible installation) |

Standards and regulations

| | |
|--------------------------|-----------------|
| Standard designation | M8 connector |
| Standards/specifications | IEC 61076-2-104 |

SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable


1406243

<https://www.phoenixcontact.com/us/products/1406243>




Drawings

Schematic diagram

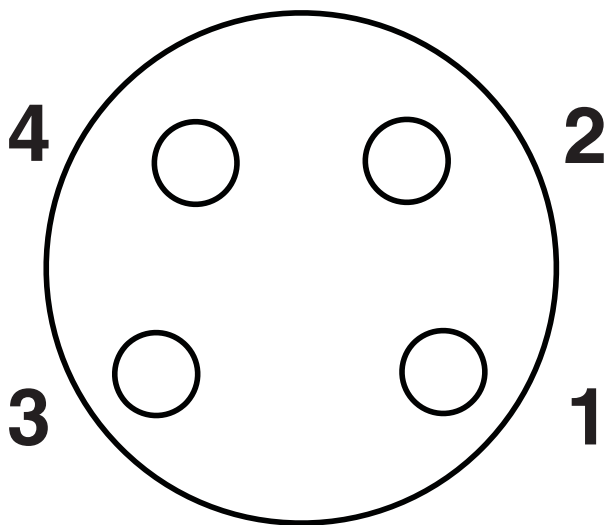

Pin assignment M8 socket, 4-pos., view female side

Schematic diagram

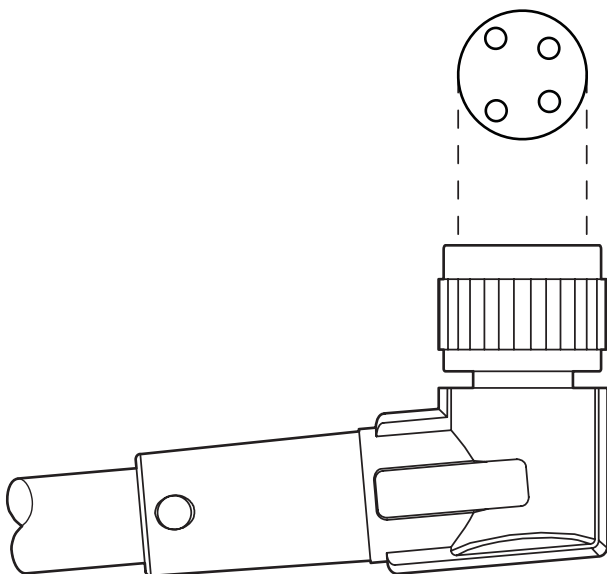

Layout of connector pin assignments


SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable

1406243


<https://www.phoenixcontact.com/us/products/1406243>



Circuit diagram

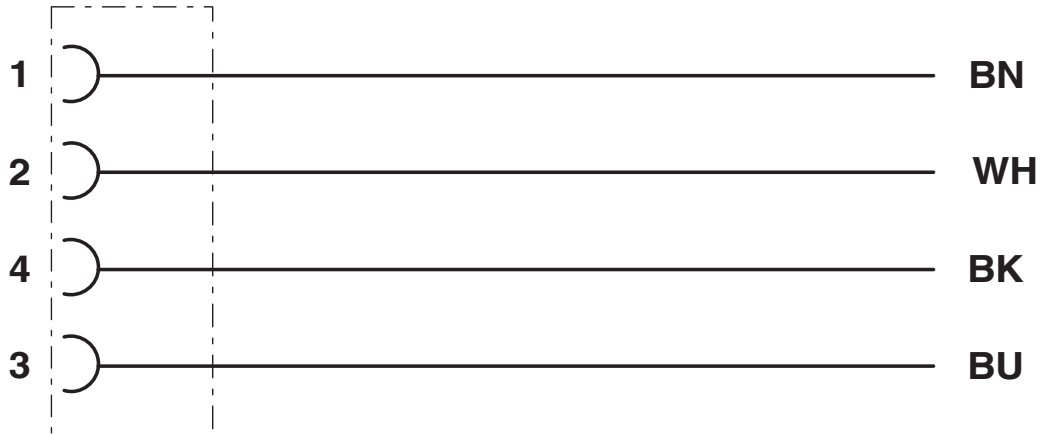

Dimensional drawing

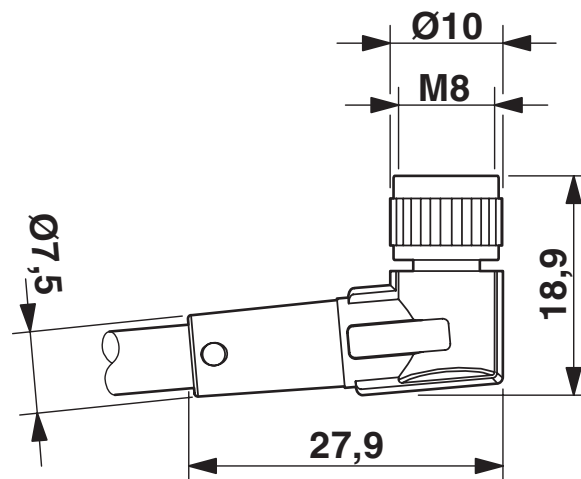

Socket M8 x 1, angled

SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable



1406243

<https://www.phoenixcontact.com/us/products/1406243>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1406243>



EAC

Approval ID: RU C-DE.BL08.B.00286



UL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 125 V | 4 A | - | - |



cUL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 125 V | 4 A | - | - |



EAC-RoHS

Approval ID: RU D-DE.HB35.B.00387



cUL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 30 V | 4 A | - | - |



UL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 30 V | 4 A | - | - |

SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable



1406243

<https://www.phoenixcontact.com/us/products/1406243>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC001855 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable



1406243

<https://www.phoenixcontact.com/us/products/1406243>

Environmental product compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable



1406243

<https://www.phoenixcontact.com/us/products/1406243>

Accessories

PROT-M 8 MS-PA-CHAIN - Screw plug

1430860

<https://www.phoenixcontact.com/us/products/1430860>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/us/products/1208487>

Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors



SAC-4P- 2,0-542/M8 FR BK - Sensor/actuator cable



1406243

<https://www.phoenixcontact.com/us/products/1406243>

SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/us/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com