

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PVC, yellow, Plug straight M8, on Socket straight M12, cable length: 1.5 m

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1406275 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF13 |
| Product key | BF1ICA |
| GTIN | 4046356797771 |
| Weight per piece (including packing) | 22.22 g |
| Weight per piece (excluding packing) | 22.22 g |
| Customs tariff number | 85444290 |
| Country of origin | US |

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

Technical data

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Number of positions | 3 |
| Application | Standard, U.S. cables |
| No. of cable outlets | 1 |
| Shielded | no |
| Coding | A |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |
| Outer sheath, material | PVC |

Electrical properties

| | |
|-----------------------|----------------------------|
| Contact resistance | $\leq 5 \text{ m}\Omega$ |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 48 V AC |
| | 60 V DC |
| Nominal current I_N | 4 A |
| Protective circuit | unwired |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Signaling

| | |
|------------------------|----|
| Status display | No |
| Status display present | No |

Connection data

Conductor connection

| | |
|-------------------|------------------------|
| Tightening torque | 0.4 Nm (M12 connector) |
|-------------------|------------------------|

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

0.2 Nm (M8 connectors)

Connector

Connection 1

| | |
|---------------------|------------------|
| Type | Plug straight M8 |
| Number of positions | 3 |
| | 3 |

Connection 2


| | |
|---------------------|---------------------|
| Type | Socket straight M12 |
| Number of positions | 3 |
| | 3 |

Cable/line

| | |
|--------------|-------|
| Cable length | 1.5 m |
|--------------|-------|

PVC yellow 105 °C [542]

Dimensional drawing



| | |
|---|--------------------------|
| Cable weight | 21 kg/km |
| UL AWM Style | 2517 (105 °C / 300 V) |
| Number of positions | 3 |
| Shielded | no |
| Cable type | PVC yellow 105 °C [542] |
| AWG signal line | 24 |
| Wire diameter incl. insulation | 1.12 mm ±0.03 mm |
| External cable diameter | 4.1 mm ±0.2 mm |
| Outer sheath, material | PVC |
| External sheath, color | yellow |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | PVC |
| Single wire, color | brown, blue, black |
| Overall twist | 3 wires, twisted |
| Max. conductor resistance | max. 79.7 Ω/km (20 °C) |
| Insulation resistance | ≥ (550 M Ohms/m @ 500V) |
| Nominal voltage, cable | 300 V |
| Minimum bending radius, flexible installation | 8 x D |
| Flame resistance | FT4 |

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

| | |
|---------------------------------|---|
| Other resistance | UV resistant |
| Ambient temperature (operation) | -30 °C ... 105 °C (cable, fixed installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Degree of protection | IP65 |
| | IP67 |
| | IP68 |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| | -40 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (Cable, flexible installation) |

Standards and regulations

| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |
| Standard designation | M8 connector |
| Standards/specifications | IEC 61076-2-104 |

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable

1406275

<https://www.phoenixcontact.com/us/products/1406275>


Drawings

Dimensional drawing



M8 x 1 male plug, straight version

Schematic diagram

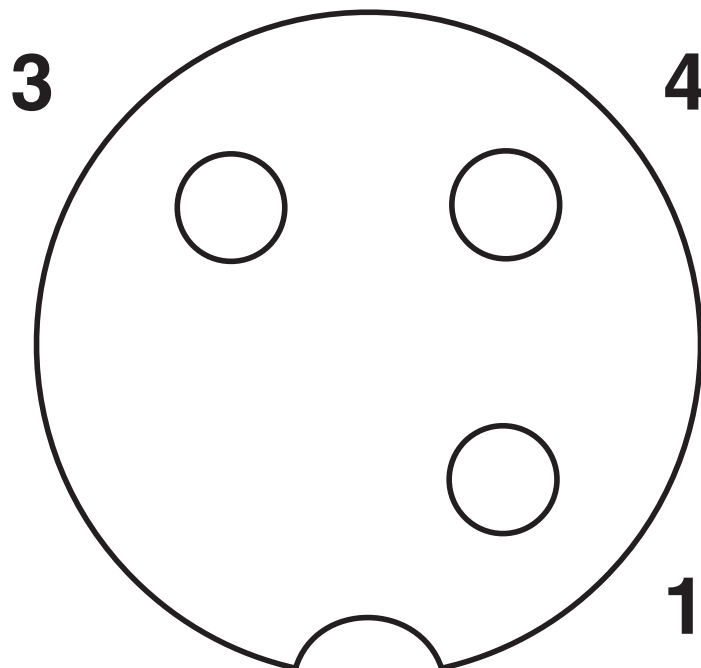

Pin assignment M12 socket, 3-pos., A-coded, view female side


SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275


<https://www.phoenixcontact.com/us/products/1406275>

Dimensional drawing

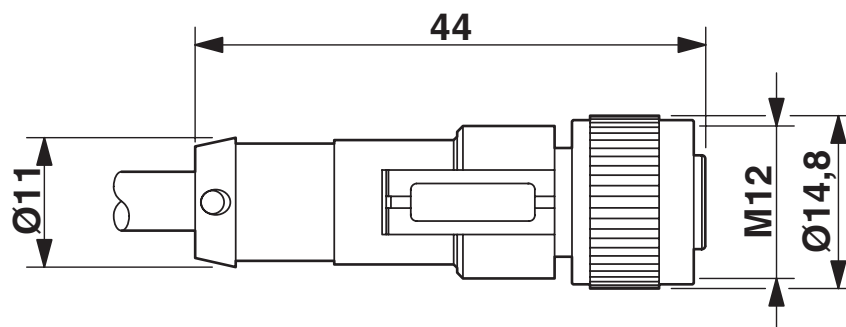

M12 x 1 socket, straight

Schematic diagram

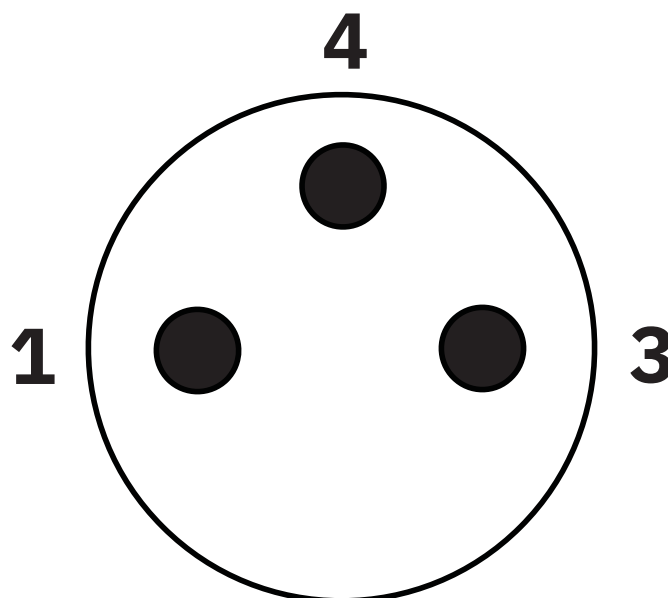

Pin assignment M8 plug, 3-pos., view male side


SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

Circuit diagram

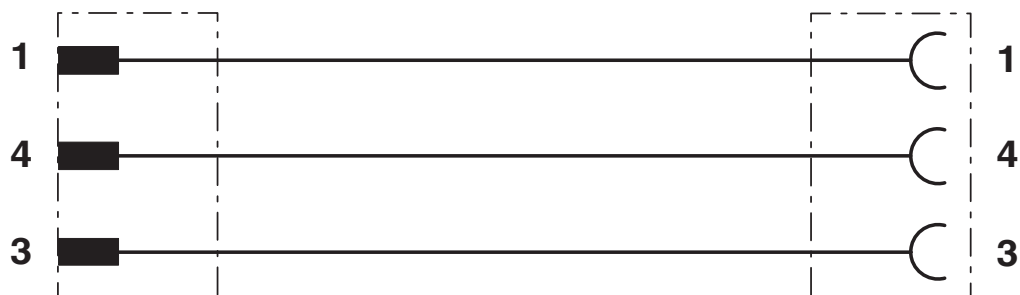

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1406275>



EAC

Approval ID: RU C-DE.BL08.B.00286



UL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 125 V | 4 A | - | - |



cUL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 125 V | 4 A | - | - |



EAC-RoHS

Approval ID: RU D-DE.HB35.B.00387



cUL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 60 V | 4 A | - | - |



UL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 60 V | 4 A | - | - |

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC001855 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275
<https://www.phoenixcontact.com/us/products/1406275>

Environmental product compliance

| | |
|------------|--|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

Accessories

PROT-M 8 FS-PA-CHAIN - Sealing cap

1430857

<https://www.phoenixcontact.com/us/products/1430857>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 plugs



PROT-M12 MS-PA-CHAIN - Screw plug

1430899

<https://www.phoenixcontact.com/us/products/1430899>

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

SAC-M12-EXCLIP-F - Locking clip

1558991

<https://www.phoenixcontact.com/us/products/1558991>



Locking clip for the socket side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools

TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/us/products/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/us/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/us/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/us/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/us/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

SAC-3P-M8MS/ 1,5-542/M12FS BK - Sensor/actuator cable



1406275

<https://www.phoenixcontact.com/us/products/1406275>

SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/us/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com