

# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON ADVANCE sleeve housing, B16, with stainless steel screw locking (Allen screw), salt-water-resistant aluminum, height 93.7 mm, with thread, 1x M32 straight cable outlet, without surface; conductive seal (EMC properties)

## Commercial data

Item number	1413416
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF58
Product key	BF7APH
Catalog page	Page 617 (C-2-2019)
GTIN	4055626030388
Weight per piece (including packing)	311.8 g
Weight per piece (excluding packing)	311.4 g
Customs tariff number	85389099
Country of origin	CN

1413416

<https://www.phoenixcontact.com/us/products/1413416>

## Technical data


### Notes

General	For contact inserts HC-B16, BB32, D40, DD72, HS6, HV6, M, K
---------	---

### Product properties

Type	B16
Product type	Housing with screw locking
Application	Offshore/EMC
No. of cable outlets	1
Type of the screw connection	1x M32
Fixing screws	M6 (screw head: 5 mm Allen screw)
Housing type	Sleeve housing
Cable outlet	straight
Pg screw connection	none

### Dimensions

Dimensional drawing	
Width	57 mm
Height	93.7 mm
Length	125.5 mm

### Installation dimensions

Width of the assembly cutout	35 mm
Length of the assembly cutout	86 mm

### Material specifications

Seal material	NBR, conductive
Housing surface material	uncoated
Locking latch material	Stainless steel
Impact strength	IK09
Housing material	Die-cast aluminum, salt water resistant

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP66
	IP68 (0.2 bar/24 h)
	IP69 (ISO 20653:2013-02)
	4 (UL 50e)

1413416

<https://www.phoenixcontact.com/us/products/1413416>

Enclosure rating (NEMA)	4X (UL 50e)
	12 (UL 50e)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

## Mechanical properties

### Mechanical data

Type of the screw connection	1x M32
Locking type	Screw

## Mounting


Assembly instructions	In order to guarantee that the protective conductor contact functions even when plugged in at an angle, the two panel-mount flanges must have sufficient electrical contact with the metal mounting panel.
Fixing screws	M6 (screw head: 5 mm Allen screw)

1413416

<https://www.phoenixcontact.com/us/products/1413416>

## Drawings

Dimensional drawing

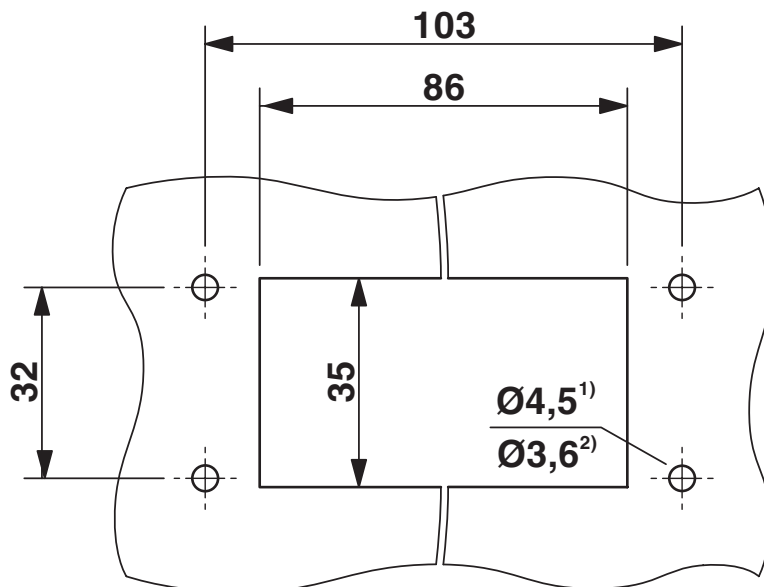


Mounting cutout

1) when M4 screws are used

2) when self-tapping Torx® screws are used (Torx® 20, M4)

Dimensional drawing

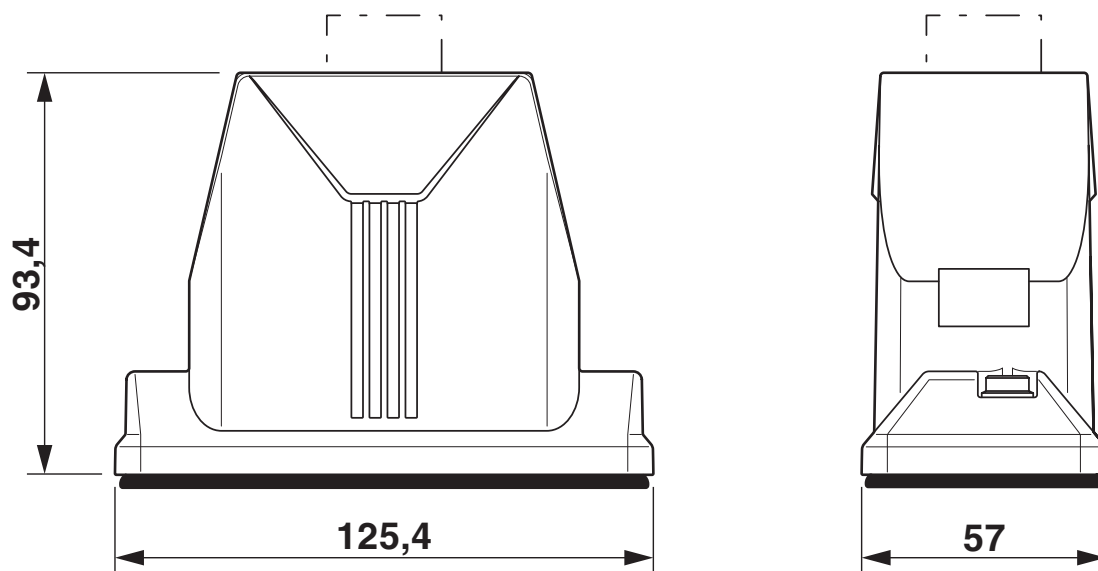


Dimensional drawing

1413416

<https://www.phoenixcontact.com/us/products/1413416>

## Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1413416>

### DNV

Approval ID: TAE000037S



### cUL Recognized

Approval ID: E255026



### UL Recognized

Approval ID: E255026



### EAC

Approval ID: RU C-DE.AI30.B.01102



### EAC

Approval ID: RU C-DE.BL08.B.00511

### cULus Recognized

1413416

<https://www.phoenixcontact.com/us/products/1413416>

## Classifications

### ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

### ETIM

ETIM 8.0	EC000437
----------	----------

### UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

## Accessories

### HC-B-AF - Panel-mount flange

1686533

<https://www.phoenixcontact.com/us/products/1686533>

Panel-mount flange for HEAVYCON ADVANCE housing




---

### HC-B-AF-SET - Panel-mount flange

1604638

<https://www.phoenixcontact.com/us/products/1604638>

Panel-mount flange for HEAVYCON ADVANCE housing, set consisting of:  
2 panel-mount flanges with 4 self-tapping screws (M4, Torx®) and 4 fan-type washers





# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

## HC-B 16-TMS-SD-IP50 - Protective cover

1690752

<https://www.phoenixcontact.com/us/products/1690752>



Protective cover B16, Clip locking, protective cover material: PA, height: 31.2 mm, seal: no, with lanyard

---

## HC-B 16-TMS-SD-IP66 - Protective cover

1411517

<https://www.phoenixcontact.com/us/products/1411517>



HEAVYCON ADVANCE, IP66, B16 protective cover, for panel mounting side, with screw locking, with retaining cord, diameter of retaining cord eyelet: 3 mm

# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

## G-INS-M32-M68N-NNES-S - Cable gland

1411166

<https://www.phoenixcontact.com/us/products/1411166>



Cable gland, material for screw connection: Brass, nickel-plated, external cable diameter 15 mm ... 21 mm, shielding: no, connecting thread: M32 x 1.5, color: silver, with O-ring

---

## HC-M-KV-M32(19-27) - Cable gland

1646010

<https://www.phoenixcontact.com/us/products/1646010>



Metal screw connection up to 5 bar, thread length: 8 mm, cable diameter: 19 - 27 mm, WAF 43, screw connection: M32

# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

## US-EMLP-HA (20X9) - Plastic label

0830989

<https://www.phoenixcontact.com/us/products/0830989>



Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

---

## US-EMLP-HA (20X9) CUS - Plastic label

0830995

<https://www.phoenixcontact.com/us/products/0830995>



Plastic label, Card, white, labeled, can be labeled with: THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

## WP-G HF IP66 M32 BK - Screw connection

3240900

<https://www.phoenixcontact.com/us/products/3240900>



Cable gland, metric thread, IP66 protection, straight

---

## WP-G HF IP69K M32 BK - Screw connection

3240886

<https://www.phoenixcontact.com/us/products/3240886>



Cable gland, metric thread, IP68/69k protection, straight

# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing

1413416

<https://www.phoenixcontact.com/us/products/1413416>



## WP-GA HF IP66 M32 BK - Screw connection

3240928

<https://www.phoenixcontact.com/us/products/3240928>

Cable gland, metric thread, IP66 protection, angled



---

## WP-GA HF IP69K M32 BK - Screw connection

3240914

<https://www.phoenixcontact.com/us/products/3240914>

Cable gland, metric thread, IP68/69k protection, angled



# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

## WP-GR HF IP66 M32 BK - Screw connection

3240956

<https://www.phoenixcontact.com/us/products/3240956>



Cable gland, metric thread, IP66 protection, with strain relief

---

## WP-GR HF IP69K M32 BK - Screw connection

3240942

<https://www.phoenixcontact.com/us/products/3240942>



Cable gland, metric thread, IP68/69k protection, with strain relief

# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

## WP-G PP HF M32 - Screw connection

3241000

<https://www.phoenixcontact.com/us/products/3241000>

Cable gland made from PP with metric thread, IP65 protection



---

## WP-GT PP HF M32 - Screw connection

3241014

<https://www.phoenixcontact.com/us/products/3241014>

Cable gland made from PP with metric thread, rotatable, IP54 protection



# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

## WP-G BRASS IP40 M32 - Screw connection

3241049

<https://www.phoenixcontact.com/us/products/3241049>

Cable gland made from brass with metric thread, IP40 protection



---

## WP-GT BRASS M32 - Screw connection

3241035

<https://www.phoenixcontact.com/us/products/3241035>

Cable gland made from brass with metric thread, rotatable, IP40 protection





# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

## WP-G BRASS IP65 M32 - Screw connection

3241063

<https://www.phoenixcontact.com/us/products/3241063>



Cable gland made from brass with metric thread, IP65 protection

---

## SF-BIT-HEXB 5-89 - Screw insert

1208911

<https://www.phoenixcontact.com/us/products/1208911>



Screw bit, hexagonal with ball head, E6.3-1/4" drive, size: Hex 5 x 89 mm, hardened, suitable for holder according to DIN 3126-F 6.3/ISO 1173

# HC-ADV-B16-HHWH-1TTM32-EMC-AL - Housing



1413416

<https://www.phoenixcontact.com/us/products/1413416>

## SF-M BH - Screwdriver

1212070

<https://www.phoenixcontact.com/us/products/1212070>



Bit screwdriver, with 1/4" quick-action chuck, handle length 119 mm, 2-component handle, with non-slip grip, suitable for bits according to DIN 3126-C 6.3 and E 6.3/ISO 1173, magnetic

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)