

# MG-INC-M25-M67L-PTES-LG - Membrane screw connection



1415188

<https://www.phoenixcontact.com/us/products/1415188>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Membrane screw connection, material for screw connection: Polypropylene, external cable diameter 9 mm ... 17 mm, shielding: no, connecting thread: M25, color: light grey

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1415188             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 20 pc               |
| Sales key                            | BF68                |
| Product key                          | BF7DFX              |
| Catalog page                         | Page 693 (C-2-2019) |
| GTIN                                 | 4055626038025       |
| Weight per piece (including packing) | 6.1 g               |
| Weight per piece (excluding packing) | 5.722 g             |
| Customs tariff number                | 39269097            |
| Country of origin                    | DE                  |

# MG-INC-M25-M67L-PTES-LG - Membrane screw connection



1415188

<https://www.phoenixcontact.com/us/products/1415188>

## Technical data


### Mounting

|                       |   |
|-----------------------|---|
| Assembly instructions | for 0.8 mm ... 3.5 mm wall thickness, 25 mm ... 25.7 mm bore hole |
|-----------------------|---|

### Product properties

|                          |                       |
|--------------------------|-----------------------|
| Product type             | Full screw connection |
| Manufacturer             | WISKA                 |
| Manufacturer Designation | CLIXX 25              |
| Shielded                 | no                    |

### Dimensions

|                                  |   |
|----------------------------------|---|
| Dimensional drawing              |  |
| Length                           | 15 mm   |
| Length of the connecting thread  | 8 mm  |
| Length without connecting thread | 7 mm  |
| Diameter                         | 25 mm   |
| Connecting thread diameter       | 25 mm   |
| Hole diameter                    | 25 mm ... 25.7 mm   |
| Hexagon angular dimension        | 40 mm   |
| Thread type connection side      | M25   |

### Material specifications

|                               |               |
|-------------------------------|---------------|
| Seal material                 | TPE           |
| Material for screw connection | Polypropylene |

### Cable/line

|                             |                |
|-----------------------------|----------------|
| External cable diameter ( ) | 9 mm ... 17 mm |
|-----------------------------|----------------|

### Environmental and real-life conditions

#### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
| Degree of protection            | IP66             |
|                                 | IP67             |
| Ambient temperature (operation) | -40 °C ... 65 °C |


# MG-INC-M25-M67L-PTES-LG - Membrane screw connection



1415188

<https://www.phoenixcontact.com/us/products/1415188>

## Drawings

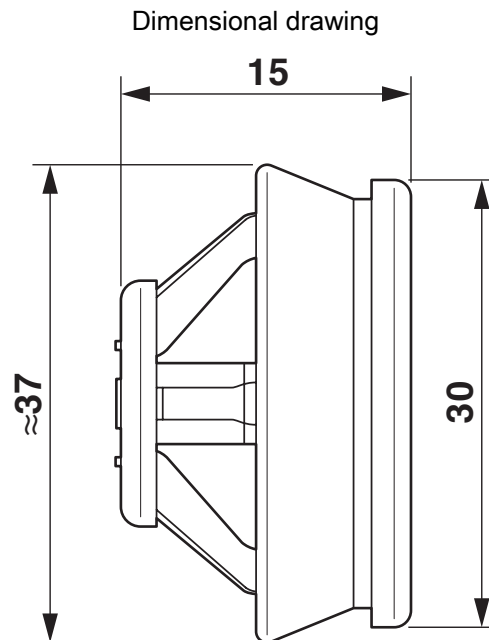

# MG-INC-M25-M67L-PTES-LG - Membrane screw connection



1415188

<https://www.phoenixcontact.com/us/products/1415188>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27144433 |
| ECLASS-13.0 | 27140890 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC003608 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121300 |
|-------------|----------|

# MG-INC-M25-M67L-PTES-LG - Membrane screw connection



1415188  
<https://www.phoenixcontact.com/us/products/1415188>

## Environmental product compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)