

# SAC-4P-M12MRT/ 1,0-PUR/M12FRT - Power cable



1415196

<https://www.phoenixcontact.com/us/products/1415196>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position halogen-free, Plug angled M12, coding: T, on Socket angled M12, coding: T, cable length: 1 m, For direct current up to 12 A/63 V

## Your advantages

- Easy and safe: 100% electrically tested plug-in components
- Protection against incorrect connection using special T-coding
- Our standard: robust halogen-free PUR cable

## Commercial data

Item number	1415196
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	BF05
Product key	BF1CCQ
Catalog page	Page 185 (C-6-2019)
GTIN	4055626041216
Weight per piece (including packing)	150.1 g
Weight per piece (excluding packing)	147.1 g
Customs tariff number	85444290
Country of origin	US

## Technical data

### Product properties

Product type	Power cable
Number of positions	4
Application	Power supply
No. of cable outlets	1
Shielded	no
Coding	T

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Material specifications

Flammability rating according to UL 94	V0
Material of grip body	PP
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated

### Electrical properties

Contact resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	63 V DC
Nominal current $I_N$	12 A
Protective circuit	unwired

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

### Connector

#### Connection 1

Type	Plug angled M12
Coding type	T (Power)

#### Connection 2

Type	Socket angled M12
Coding type	T (Power)

### Cable/line

Cable length	1 m
--------------	-----


# SAC-4P-M12MRT/ 1,0-PUR/M12FRT - Power cable



1415196

<https://www.phoenixcontact.com/us/products/1415196>

PUR halogen-free black [PUR]

Dimensional drawing	
Cable weight	109 kg/km
UL AWM Style	20233 / 10493 (80°C/300 V)
Number of positions	4
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor cross section	4x 1.5 mm²
Wire diameter incl. insulation	2.35 mm ±0.05 mm
External cable diameter	8.4 mm ±0.25 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	brown, white, blue, black
Thickness, insulation	≥ 0.25 mm
Thickness, outer sheath	approx. 1.3 mm
Overall twist	4 wires, twisted
Length of twist, overall twist	90 mm
Max. conductor resistance	≤ 13 Ω/km (at 20 °C)
Insulation resistance	≥ 1 GΩ*km (at 20 °C)
Nominal voltage, cable	≤ 300 V AC
Test voltage	≥ 3000 V AC (Spark test)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Max. bending cycles	4000000
Halogen-free	in accordance with DIN VDE 0472 part 815 in accordance with DIN EN 50267-2-1
Flame resistance	According to UL 758/1581 (Cable Flame) according to UL 758/1581 FT1 According to DIN EN 60332-1-2
Resistance to oil	According to DIN EN 60811-2-1, 168 h at 100°C According to UL 758, 168 h at 60°C
Other resistance	Hydrolysis and microbe resistant as per VDE 0282 section 10 Low adhesion abrasion-resistant

# SAC-4P-M12MRT/ 1,0-PUR/M12FRT - Power cable



1415196

<https://www.phoenixcontact.com/us/products/1415196>

	Resistant to salt water
Ambient temperature (operation)	-50 °C ... 80 °C (cable, fixed installation)
	-30 °C ... 80 °C (Cable, flexible installation)

## Environmental and real-life conditions

### Ambient conditions


Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)

## Standards and regulations


Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111

## Drawings

Circuit diagram

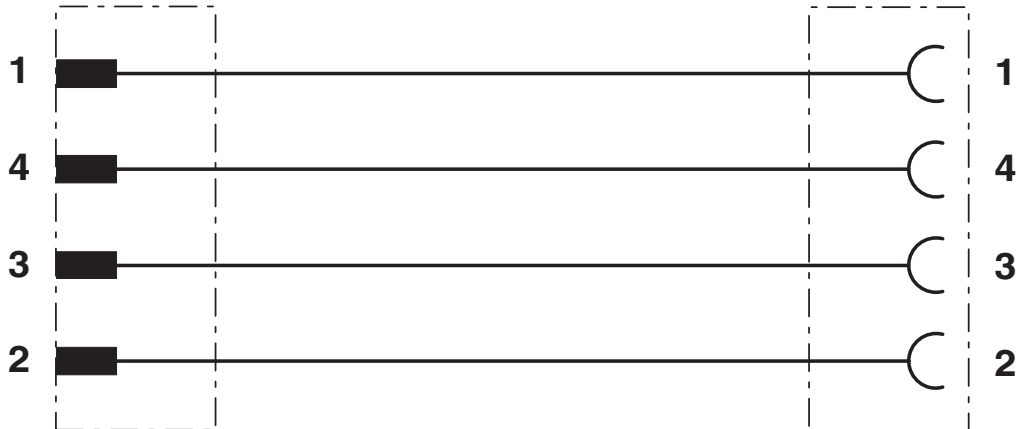


Schematic diagram

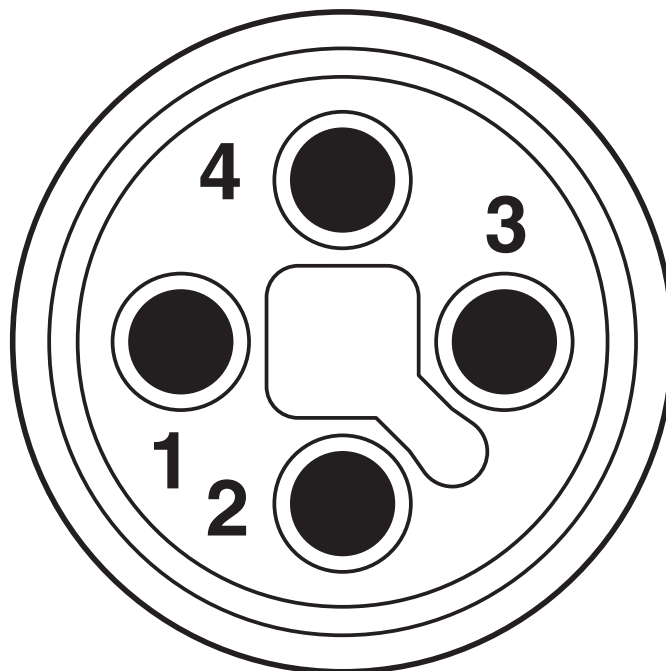


Pin assignment for M12 plug, 4-pos., T-coded, view of plug side

Diagram

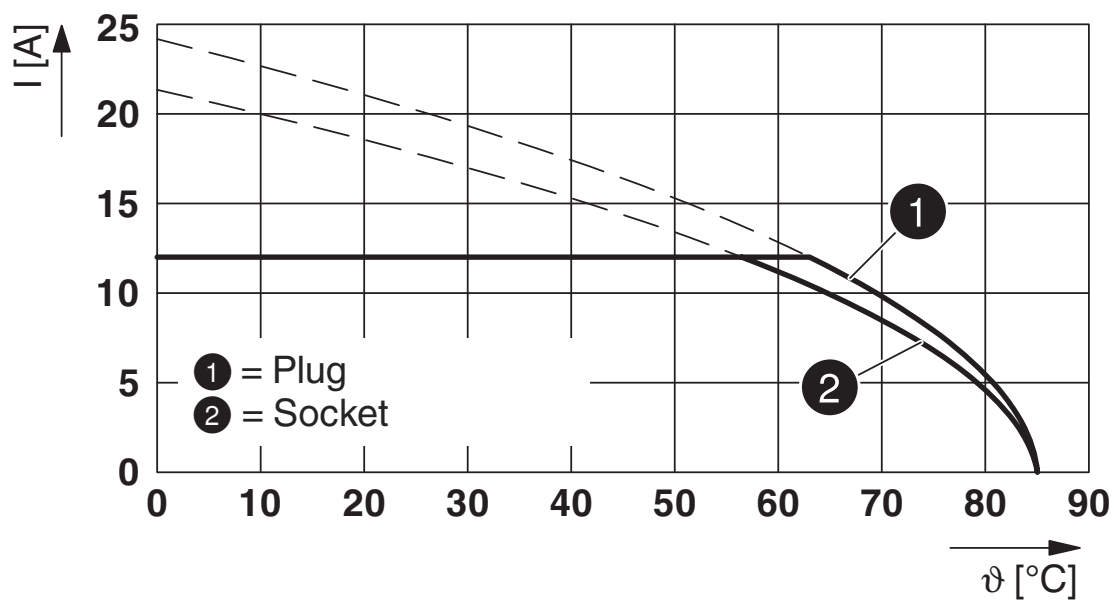


Base curve

Dimensional drawing

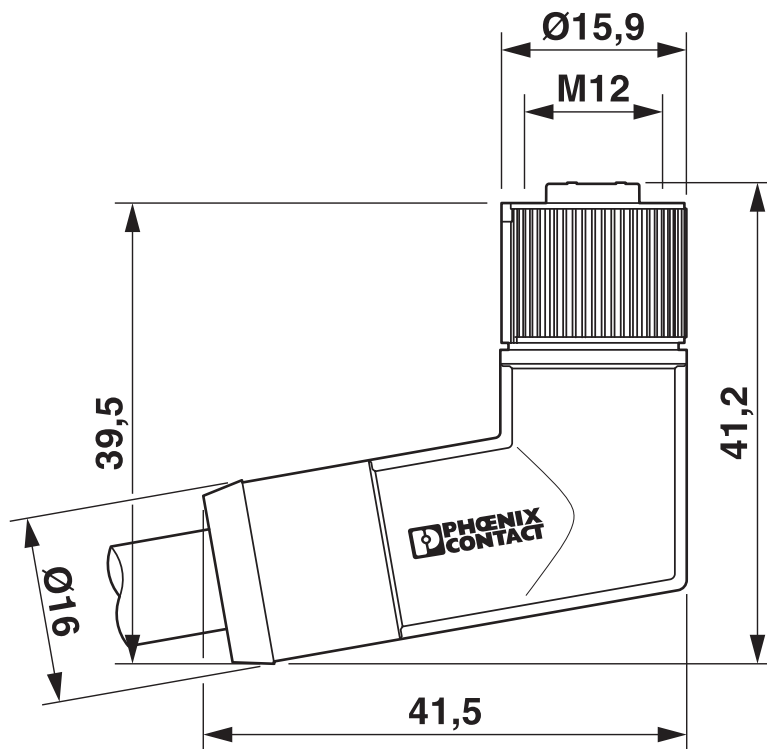


M12 x 1 socket, angled

Schematic diagram

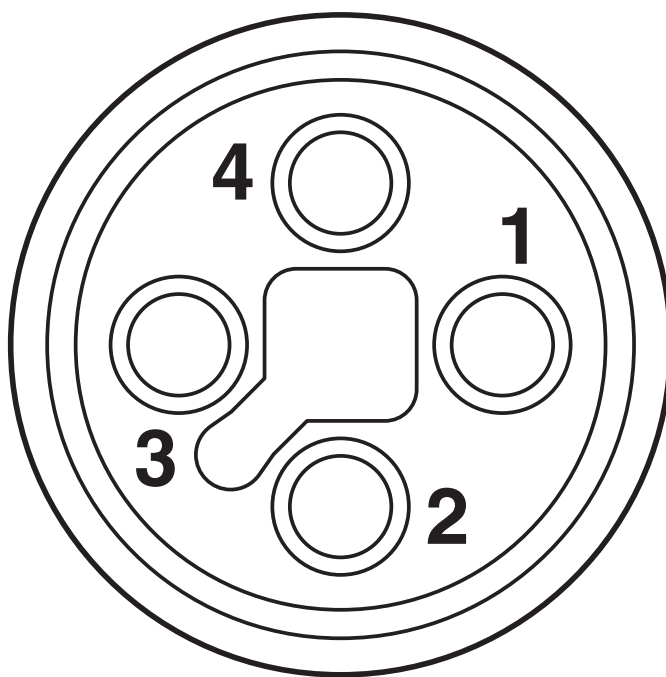

Pin assignment of M12 socket, 4-pos., T-coded, socket side view

Dimensional drawing

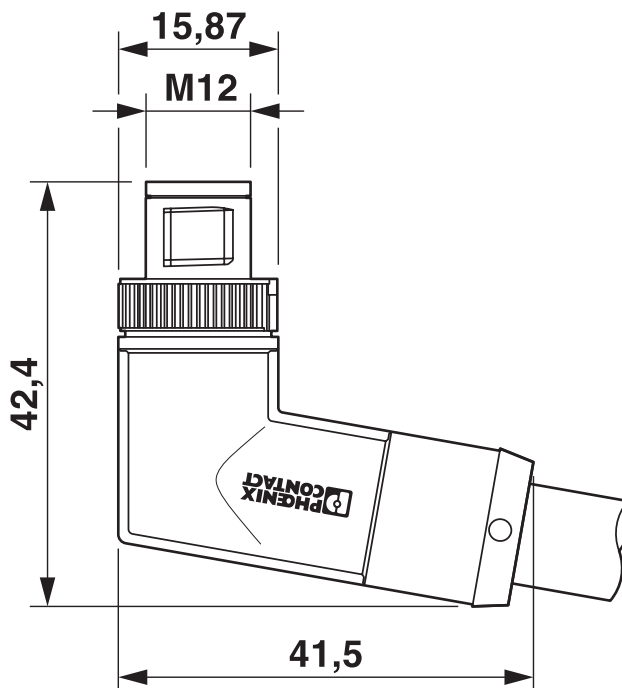

M12 x 1 male plug, angled

# SAC-4P-M12MRT/ 1,0-PUR/M12FRT - Power cable



1415196

<https://www.phoenixcontact.com/us/products/1415196>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1415196>



### UL Listed

Approval ID: E468743

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	63 V	12 A	-	- 16



### cUL Listed

Approval ID: E468743

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	63 V	12 A	- 16	-



### EAC-RoHS

Approval ID: RU D-DE.HB35.B.00387

### cULus Listed



# SAC-4P-M12MRT/ 1,0-PUR/M12FRT - Power cable



1415196

<https://www.phoenixcontact.com/us/products/1415196>

## Classifications

### ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060327

### ETIM

ETIM 8.0	EC001855
----------	----------

### UNSPSC

UNSPSC 21.0	26121600
-------------	----------

# SAC-4P-M12MRT/ 1,0-PUR/M12FRT - Power cable



1415196

<https://www.phoenixcontact.com/us/products/1415196>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# SAC-4P-M12MRT/ 1,0-PUR/M12FRT - Power cable



1415196

<https://www.phoenixcontact.com/us/products/1415196>

## Accessories

### PROT M12 MS PWR - Screw plug

1092802

<https://www.phoenixcontact.com/us/products/1092802>



An M12 screw plug for the unoccupied M12 females of the M12 POWER connectors, boxes, and flush-type connectors

---

### PROT-M12 FS - Sealing cap

1560251

<https://www.phoenixcontact.com/us/products/1560251>



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

# SAC-4P-M12MRT/ 1,0-PUR/M12FRT - Power cable



1415196

<https://www.phoenixcontact.com/us/products/1415196>

## SAC BIT M12-D16 - Tool

1200305

<https://www.phoenixcontact.com/us/products/1200305>

Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, knurl diameter: 16 mm, for 4 mm hexagonal drive



---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)