

SACC-M12FR-5CON-PG 9-SH - Connector



1430433

<https://www.phoenixcontact.com/us/products/1430433>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Connector, Universal, 5-position, shielded, Socket angled M12, A, Screw connection, knurl material: Brass, nickel-plated, cable gland Pg9, external cable diameter 6 mm ... 8 mm



Your advantages

- Safe use in the field, thanks to a high degree of protection
- Screw connection: proven connection technology for a large selection of different conductors
- Reliable signal transmission – 360° shielding in environments with electromagnetic interference

Commercial data

Item number	1430433
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF30
Product key	BF2CBA
Catalog page	Page 24 (C-2-2019)
GTIN	4046356322706
Weight per piece (including packing)	72.2 g
Weight per piece (excluding packing)	72 g
Customs tariff number	85366990
Country of origin	CN

Technical data

Notes

General

NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.

Mounting

Assembly instructions

The connector pin assignment can be rotated 90° to the cable outlet

Connection method

Screw connection

Product properties

Product type

Circular connector (cable-side)

Sensor type

Universal

Number of positions

5

No. of cable outlets

1

Shielded

yes

Coding

A

Cable outlet

angled

Pg screw connection

Pg9

Insulation characteristics

Overvoltage category


II

Degree of pollution

3

Dimensions

Dimensional drawing



Length

48.3 mm

External dimensions

Outside diameter

6 mm ... 8 mm

Housing

Diameter housing

20 mm

Material specifications

Flammability rating according to UL 94

HB

Seal material

NBR

Material of grip body

Brass, nickel-plated

SACC-M12FR-5CON-PG 9-SH - Connector



1430433

<https://www.phoenixcontact.com/us/products/1430433>

Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA
Material for screw connection	Brass, nickel-plated

Connection data

Conductor connection

Connection method	Screw connection
Connection cross section	0.25 mm² ... 0.75 mm² (without ferrule)
	0.14 mm² ... 0.5 mm² (with ferrule)
	0.25 mm² ... 0.75 mm² (solid)
Connection cross section AWG	24 ... 18 (without ferrule)
	26 ... 20 (with ferrule)
Stripping length of the individual wire	5 mm
Tightening torque	0.4 Nm (M12 knurl)
	0.2 Nm (Screw terminal blocks)
	1 Nm (Pressure nut with coupling sleeve)

Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	48 V AC
	60 V DC
Nominal current I _N	4 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

Connector

Connection 1

Head design	Socket
Head cable outlet	angled
Head thread type	M12
Coding	A

Cable/line

Signal type/category	Universal
Stripping length of the individual wire	5 mm

Environmental and real-life conditions

Ambient conditions

SACC-M12FR-5CON-PG 9-SH - Connector



1430433

<https://www.phoenixcontact.com/us/products/1430433>

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 85 °C (Plug / socket)

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

SACC-M12FR-5CON-PG 9-SH - Connector


1430433

<https://www.phoenixcontact.com/us/products/1430433>



Drawings

Dimensional drawing

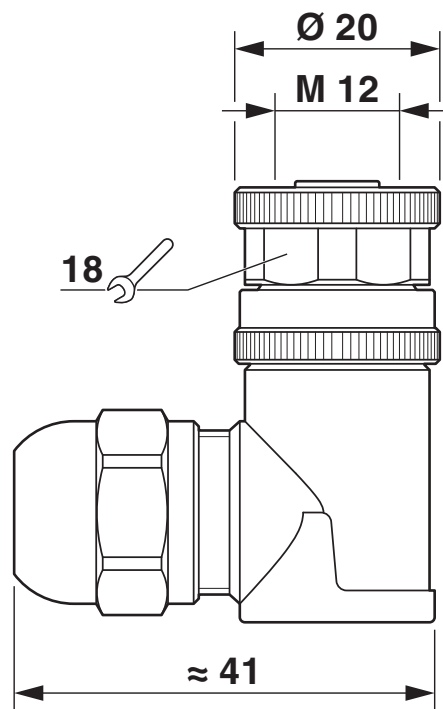


M12 x 1 socket, angled, shielded

1430433

<https://www.phoenixcontact.com/us/products/1430433>

Schematic diagram

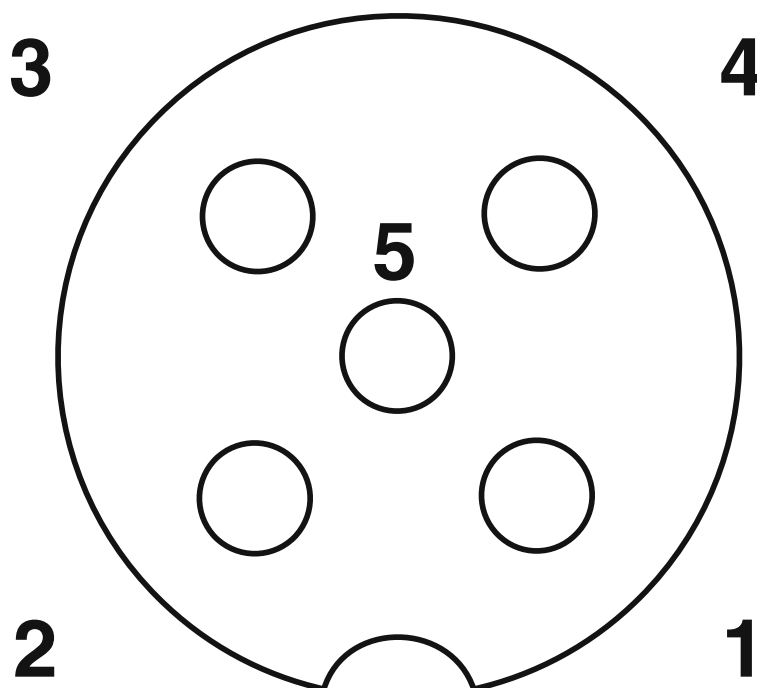

Pin assignment M12 socket, 5-pos., A-coded, socket side view

SACC-M12FR-5CON-PG 9-SH - Connector





1430433

<https://www.phoenixcontact.com/us/products/1430433>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1430433>

 cUL Recognized Approval ID: FILE E 221474				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	60 V	4 A	-	-

 UL Recognized Approval ID: FILE E 221474				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	60 V	4 A	-	-

cULus Recognized				
-------------------------	--	--	--	--

SACC-M12FR-5CON-PG 9-SH - Connector



1430433

<https://www.phoenixcontact.com/us/products/1430433>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 8.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

SACC-M12FR-5CON-PG 9-SH - Connector



1430433

<https://www.phoenixcontact.com/us/products/1430433>

Accessories

PROT-M12 MS-PA-CHAIN - Screw plug

1430899

<https://www.phoenixcontact.com/us/products/1430899>

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



SAC-5P-100,0-PUR/SH-0,34 - Cable reel

1501728

<https://www.phoenixcontact.com/us/products/1501728>

By the meter, Cable reel, shielded, PUR halogen-free, black-gray RAL 7021, 5-wire, color single wire: brown, white, blue, black, gray, cable length: 100 m



SACC-M12FR-5CON-PG 9-SH - Connector



1430433

<https://www.phoenixcontact.com/us/products/1430433>

A 0,25- 5 - Ferrule

3202465

<https://www.phoenixcontact.com/us/products/3202465>

Ferrule, length: 5 mm, color: silver



TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/us/products/1208429>

Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors



SACC-M12FR-5CON-PG 9-SH - Connector

1430433

<https://www.phoenixcontact.com/us/products/1430433>



SACC BIT M12-D20 - Tool

1208445

<https://www.phoenixcontact.com/us/products/1208445>

Nut for assembling M12 connectors for assembly with a knurl diameter of 20 mm, for 4 mm hexagonal drive



TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/us/products/1212224>

Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm



SACC-M12FR-5CON-PG 9-SH - Connector

1430433

<https://www.phoenixcontact.com/us/products/1430433>



TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/us/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

CRIMPFOX 6H - Crimping pliers

1212046

<https://www.phoenixcontact.com/us/products/1212046>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm² ... 6 mm², unlockable pressure lock, lateral entry

SACC-M12FR-5CON-PG 9-SH - Connector



1430433

<https://www.phoenixcontact.com/us/products/1430433>

WIREFOX SAC - Stripping tool

1212623

<https://www.phoenixcontact.com/us/products/1212623>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

VS-CABLE-STRIP-VARIO - Stripping tool

1657407

<https://www.phoenixcontact.com/us/products/1657407>



Stripping tool, for the multi-level stripping of shielded cables

SACC-M12FR-5CON-PG 9-SH - Connector

1430433

<https://www.phoenixcontact.com/us/products/1430433>



SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/us/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com