

SAC-5P- 5,0-115/M12FSB - Sensor/actuator cable



1535914

<https://www.phoenixcontact.com/us/products/1535914>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 5-position, free cable end, on Socket straight M12, coding: B, cable length: 5 m

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1535914 |
| Packing unit | 1 pc |
| Minimum order quantity | 50 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF03 |
| Product key | BF1CDA |
| GTIN | 4046356027458 |
| Weight per piece (including packing) | 189.6 g |
| Weight per piece (excluding packing) | 189.6 g |
| Customs tariff number | 85444290 |
| Country of origin | DE |

SAC-5P- 5,0-115/M12FSB - Sensor/actuator cable



1535914

<https://www.phoenixcontact.com/us/products/1535914>

Technical data

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Number of positions | 5 |
| No. of cable outlets | 1 |
| Shielded | no |
| Coding | B |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |

Electrical properties

| | |
|-----------------------|----------------------------|
| Contact resistance | $\leq 5 \text{ m}\Omega$ |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 48 V AC |
| | 60 V DC |
| Nominal current I_N | 4 A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Signaling

| | |
|------------------------|----|
| Status display | No |
| Status display present | No |

Connector

Connection 1

| | |
|------|----------------|
| Type | free cable end |
|------|----------------|

Connection 2

| | |
|---------------------|---------------------|
| Type | Socket straight M12 |
| Number of positions | 5 |

SAC-5P- 5,0-115/M12FSB - Sensor/actuator cable



1535914


<https://www.phoenixcontact.com/us/products/1535914>

| | |
|---------------------|---|
| Coding type | B |
| Number of positions | 5 |

Cable/line

| | |
|--------------|-----|
| Cable length | 5 m |
|--------------|-----|

PUR, black, 5th conductor gray [115]

| | |
|---|--|
| Dimensional drawing |  |
| Cable weight | 35 kg/km |
| UL AWM Style | 20549 / 10493 (80°C/300 V) |
| Number of positions | 5 |
| Shielded | no |
| Cable type | PUR, black, 5th conductor gray [115] |
| Conductor structure signal line | 42x 0.10 mm |
| AWG signal line | 22 |
| Conductor cross section | 5x 0.34 mm² |
| Wire diameter incl. insulation | 1.27 mm ±0.02 mm |
| External cable diameter | 5 mm ±0.15 mm |
| Outer sheath, material | PUR |
| External sheath, color | black-gray RAL 7021 |
| Conductor material | Bare Cu litz wires |
| Material, filler | PP |
| Material wire insulation | PP |
| Single wire, color | brown, white, blue, black, gray |
| Thickness, insulation | ≥ 0.21 mm |
| Thickness, outer sheath | approx. 0.7 mm |
| Overall twist | 5 cores, twisted |
| Max. conductor resistance | ≤ 58 Ω/km |
| Nominal voltage, cable | ≤ 300 V |
| Test voltage | ≥ 3000 V |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 10 x D |
| Max. bending cycles | 4000000 |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| Flame resistance | in accordance with DIN UL-Style 20549 |
| | in accordance with UL 758/1581 FT2 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |

SAC-5P- 5,0-115/M12FSB - Sensor/actuator cable



1535914

<https://www.phoenixcontact.com/us/products/1535914>

| | |
|---------------------------------|---|
| Other resistance | partly UV-resistant in accordance with DIN EN ISO 4892-2-A |
| | hydrolysis and microbe resistant |
| | Resistant to salt water |
| | Low adhesion |
| | abrasion-resistant |
| Special properties | Flexible cable conduit capable |
| | Silicone-free |
| | Free of substances which would hinder coating with paint or varnish |
| | flexible |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -25 °C ... 80 °C (Cable, flexible installation) |


Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Degree of protection | IP65 |
| | IP67 |
| | IP68 |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| | -40 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (Cable, flexible installation) |


Drawings

Dimensional drawing

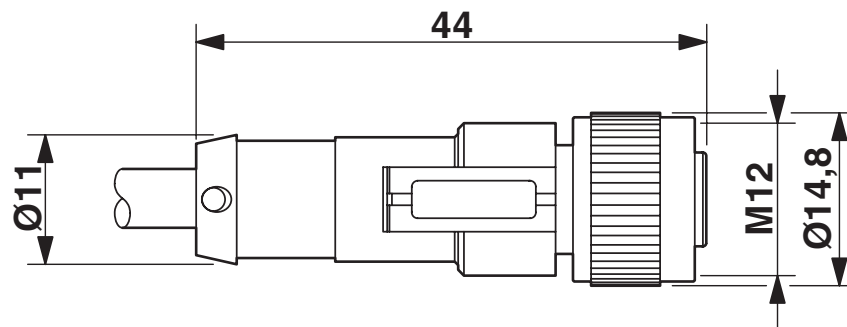

M12 x 1 socket, straight

Schematic diagram

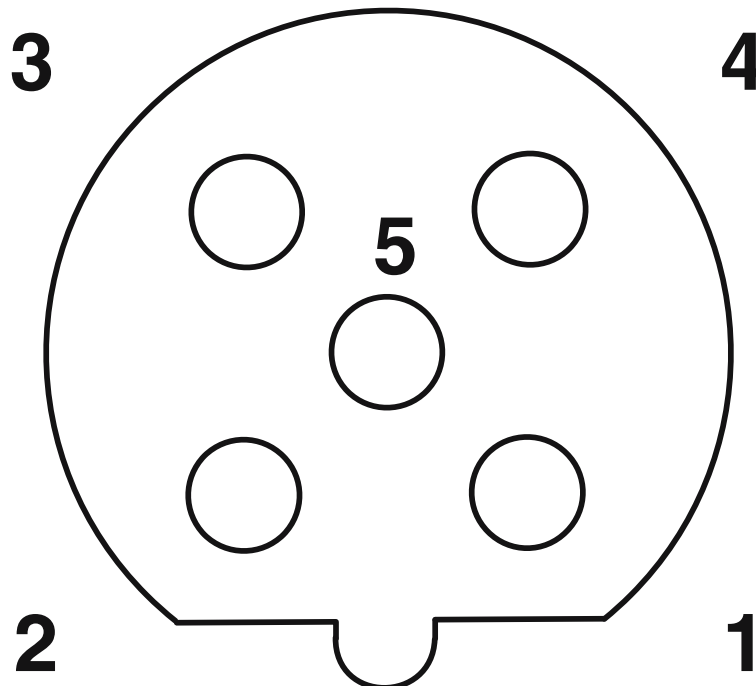

Pin assignment M12 socket, 5-pos., B-coded, female side

SAC-5P- 5,0-115/M12FSB - Sensor/actuator cable



1535914

<https://www.phoenixcontact.com/us/products/1535914>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1535914>



UL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 125 V | 4 A | - | - |



cUL Listed

Approval ID: FILE E 221474

| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | 125 V | 4 A | - | - |



EAC-RoHS

Approval ID: RU D-DE.HB35.B.00387

cULus Listed

SAC-5P- 5,0-115/M12FSB - Sensor/actuator cable



1535914

<https://www.phoenixcontact.com/us/products/1535914>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC001855 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

SAC-5P- 5,0-115/M12FSB - Sensor/actuator cable



1535914

<https://www.phoenixcontact.com/us/products/1535914>

Environmental product compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com