

CA-16P1N128007S - Cable connector



1619517

<https://www.phoenixcontact.com/us/products/1619517>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: CA, straight, shielded: yes, SPEEDCON, No. of pos.: 16, Direction of rotation: Standard, contact connection type: Pin, Solder connection, cable diameter range: 6 mm ... 10 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1243627

Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Reduced connection time with SPEEDCON fast locking system
- Solder connection: proven connection technology for various litz wires

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1619517 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB33 |
| Product key | ABRAEB |
| GTIN | 4046356823388 |
| Weight per piece (including packing) | 100 g |
| Weight per piece (excluding packing) | 100 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

CA-16P1N128007S - Cable connector



1619517

<https://www.phoenixcontact.com/us/products/1619517>

Technical data

Product properties

| | |
|--------------|---------------------------------|
| Product type | Circular connector (cable-side) |
|--------------|---------------------------------|

Connector

Insulating body

| | |
|---|--------------------|
| Coding | N |
| Insulation body material | PBT |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Insertion/withdrawal cycles | 100 |
| Connection method | Solder connection |
| Contact switching type | Pin |
| Application | Signal |
| Number of positions | 16 |
| Direction of rotation | Standard |
| Connection profile | 16 |
| Rated voltage | 48 V AC 74 V DC |
| Rated surge voltage | 1.5 kV |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Contact diameter Signal contacts | 1 mm |
| Litz wire cross-section Signal contacts max. | 1 mm ² |
| Nominal current per signal contact | 8 A |

Housing

| | |
|-----------------------------------|-------------|
| Housing material | CuZn, GD-Zn |
| Type of locking | SPEEDCON |
| Pg screw connection | none |
| Degree of protection (plugged in) | IP67 |
| Thread type | M23 |

Seal

| | |
|-------------------------|----------------|
| External cable diameter | 6 mm ... 10 mm |
| Seal material | NBR |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

CA-16P1N128007S - Cable connector




1619517

<https://www.phoenixcontact.com/us/products/1619517>

Drawings

Schematic diagram

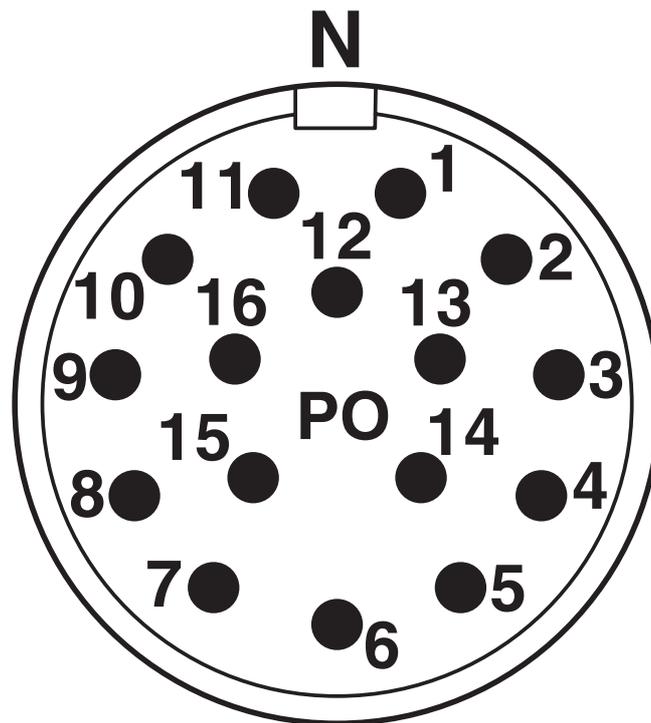


CA-16P1N128007S - Cable connector



1619517

<https://www.phoenixcontact.com/us/products/1619517>

Dimensional drawing

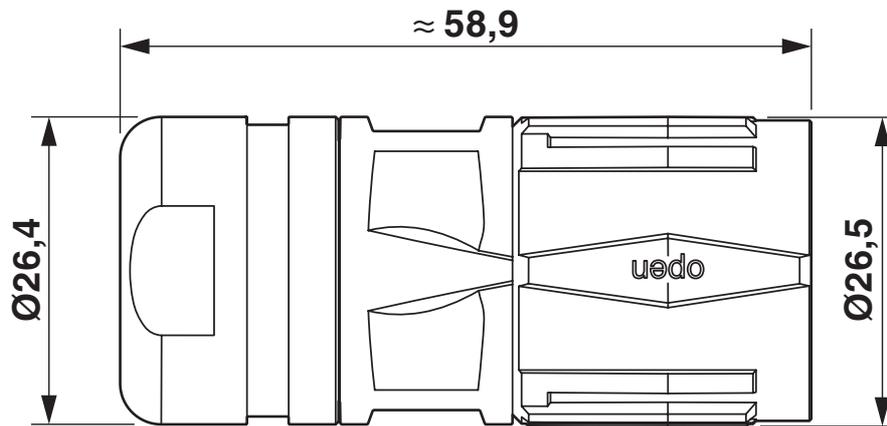

CA-16P1N128007S - Cable connector



1619517

<https://www.phoenixcontact.com/us/products/1619517>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1619517>

|  cUL Recognized Approval ID: E335019-20141210 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 48 V | 5 A | - 18 | - |

|  UL Recognized Approval ID: E335019-20141210 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 48 V | 8 A | - 18 | - |

| cULus Recognized | | | | |
|-------------------------|--|--|--|--|
|-------------------------|--|--|--|--|

CA-16P1N128007S - Cable connector



1619517

<https://www.phoenixcontact.com/us/products/1619517>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27440116 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC002635 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

CA-16P1N128007S - Cable connector



1619517

<https://www.phoenixcontact.com/us/products/1619517>

Environmental product compliance

| | |
|------------|--|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

CA-16P1N128007S - Cable connector

1619517

<https://www.phoenixcontact.com/us/products/1619517>

Accessories

SF-Z0028 - Torque screwdriver

1607456

<https://www.phoenixcontact.com/us/products/1607456>

Torque screwdriver, series: RC



SF-Z0027 - Hook wrench

1607455

<https://www.phoenixcontact.com/us/products/1607455>

Hook wrench, series: RC



CA-16P1N128007S - Cable connector

1619517

<https://www.phoenixcontact.com/us/products/1619517>

RC-Z2058 - Protective cap

1604223

<https://www.phoenixcontact.com/us/products/1604223>

Plastic protection cap for connectors with M23 knurled nut



RC-Z2468 - Protective cap

1611796

<https://www.phoenixcontact.com/us/products/1611796>

Plastic protection cap, antistatic, for connectors with M23 knurled nut



CA-16P1N128007S - Cable connector



1619517

<https://www.phoenixcontact.com/us/products/1619517>

RF-Z0014 - Color-coding

1620588

<https://www.phoenixcontact.com/us/products/1620588>

Color-coding, color: green



RF-Z0015 - Color-coding

1620592

<https://www.phoenixcontact.com/us/products/1620592>

Color-coding, color: orange



CA-16P1N128007S - Cable connector

1619517

<https://www.phoenixcontact.com/us/products/1619517>



RF-Z0016 - Color-coding

1620593

<https://www.phoenixcontact.com/us/products/1620593>

Color-coding, color: black



RF-Z0003 - Square mounting flange

1607905

<https://www.phoenixcontact.com/us/products/1607905>



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1242369

CA-16P1N128007S - Cable connector

1619517

<https://www.phoenixcontact.com/us/products/1619517>



CA-Z0077 - Metal protective cap

1627224

<https://www.phoenixcontact.com/us/products/1627224>



Metal protective cap, degree of protection: IP67, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1245447

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com