

HC-D 7-ESTC - Contact insert



1772243

<https://www.phoenixcontact.com/us/products/1772243>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

HEAVYCON male insert, D7 series, 7-pos., crimp connection, with IP65 sealing screw



Commercial data

Item number	1772243
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	BF61
Product key	BF7ABE
Catalog page	Page 438 (PC-2009)
GTIN	4017918036911
Weight per piece (including packing)	10.15 g
Weight per piece (excluding packing)	9.19 g
Customs tariff number	85366990
Country of origin	DE

HC-D 7-ESTC - Contact insert

1772243

<https://www.phoenixcontact.com/us/products/1772243>



Technical data

Notes

General	For HC-D7 housing, crimp contacts CK1,6-ED (crimp contacts not included in scope of supply)
---------	---

Mounting

Assembly instructions	Connectors may be operated only when there is no load/voltage. The inserts may only be used in plastic housings at voltages >42 V.
-----------------------	---


Product properties

Type	D7
Product type	Contact insert with a fixed no. of positions
Number of positions	7
Connection profile	7+PE

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	21 mm
Height	30.2 mm
Length	21 mm

Connection data

Connection technology

Connection technology	Crimp connection
Connection in acc. with standard	IEC / EN

Conductor connection

Conductor cross section	0.14 mm ² ... 2.5 mm ²
Connection cross section AWG	26 ... 14
Stripping length of the individual wire	8 mm 6 mm (2.5 mm ²)

Electrical properties

Rated voltage (III/3)	250 V
Rated surge voltage	4 kV

HC-D 7-ESTC - Contact insert

1772243

<https://www.phoenixcontact.com/us/products/1772243>



Rated current	10 A
Test voltage	4 kV AC

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Seal material Profile gasket	NBR
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PA

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Tests	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352

HC-D 7-ESTC - Contact insert


1772243

<https://www.phoenixcontact.com/us/products/1772243>




Drawings

Dimensional drawing

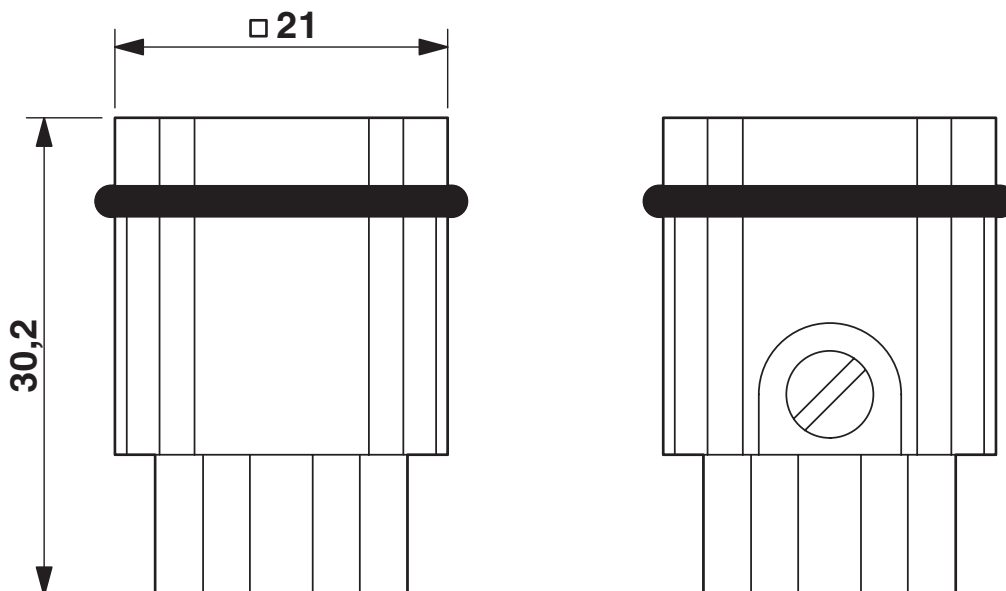

Male insert (turned contacts)

Schematic diagram

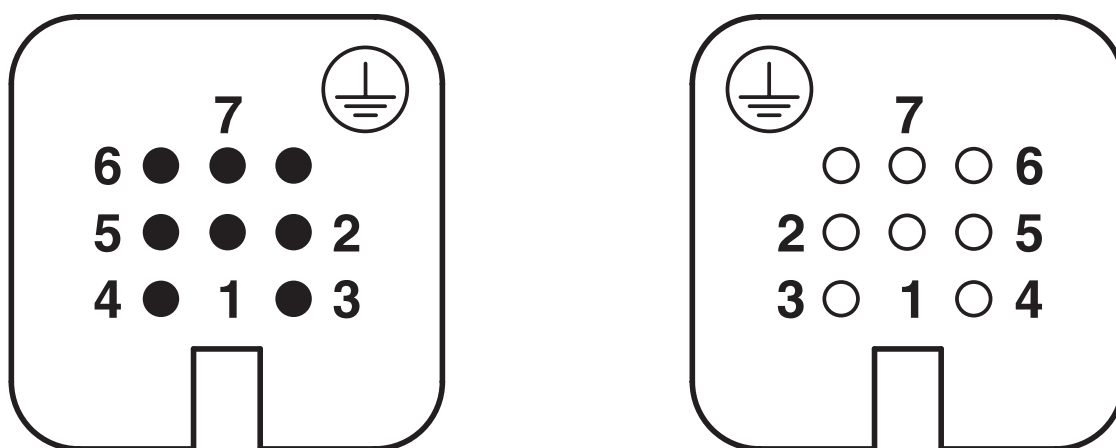


Connector pin assignment (connection side)

HC-D 7-ESTC - Contact insert

1772243

<https://www.phoenixcontact.com/us/products/1772243>

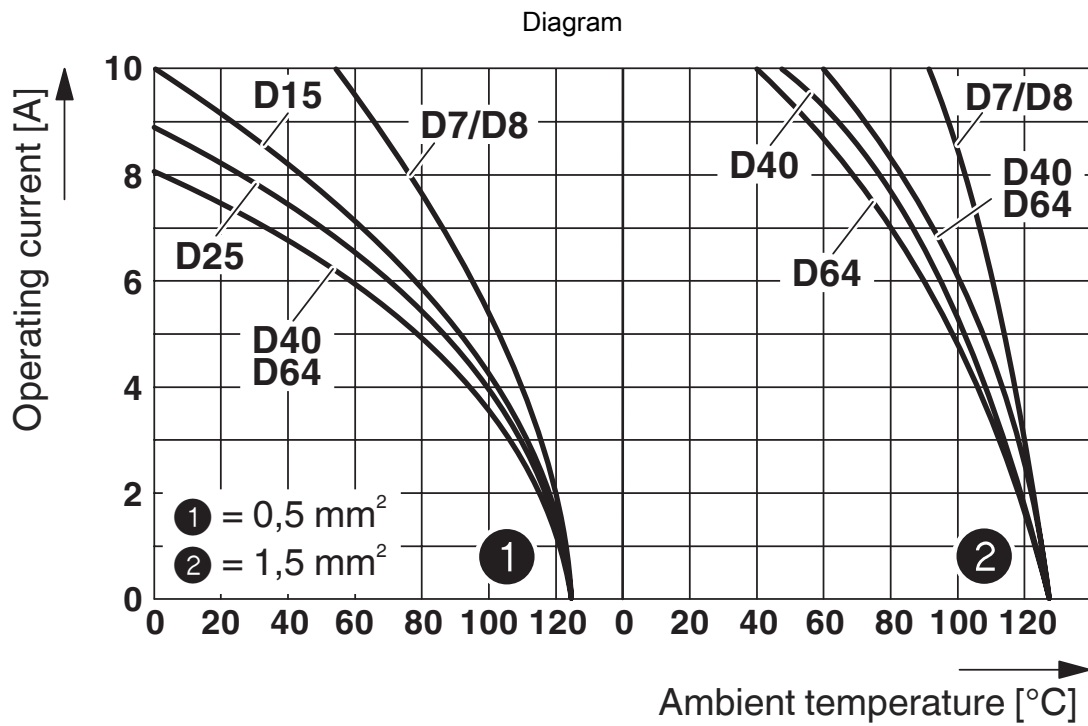

Derating diagram: HC-D...C series

HC-D 7-ESTC - Contact insert



1772243

<https://www.phoenixcontact.com/us/products/1772243>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-13.0	27440223

HC-D 7-ESTC - Contact insert



1772243

<https://www.phoenixcontact.com/us/products/1772243>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com