

HC-D 15-TFL-66/M1PG16S - Housing



1772337

<https://www.phoenixcontact.com/us/products/1772337>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing, for single locking latch, height 66 mm, with screw connection, 1x Pg16, lateral cable entry

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1772337 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF55 |
| Product key | BF7AAE |
| Catalog page | Page 422 (C-4-2013) |
| GTIN | 4017918037000 |
| Weight per piece (including packing) | 180.94 g |
| Weight per piece (excluding packing) | 178.14 g |
| Customs tariff number | 85389099 |
| Country of origin | DE |

HC-D 15-TFL-66/M1PG16S - Housing

1772337

<https://www.phoenixcontact.com/us/products/1772337>

Technical data


Notes

| | |
|---------|---------------------------------|
| General | For contact inserts HC-D15, A10 |
|---------|---------------------------------|

Product properties

| | |
|------------------------------|----------------------------|
| Type | D15 |
| Product type | Housing with locking latch |
| Application | Standard |
| No. of cable outlets | 1 |
| Type of the screw connection | 1x Pg16 |
| Housing type | Sleeve housing |
| Shielded | no |
| Cable outlet | lateral |
| Pg screw connection | with |

Dimensions

| | |
|------------------------|--|
| Dimensional drawing |  |
| Width | 36 mm |
| Height | 66 mm |
| Length | 63 mm |
| Wrench size, union nut | 22 mm |

Material specifications

| | |
|--------------------------|----------------------|
| Material | Brass, nickel-plated |
| Seal material Cable seal | NBR |
| Housing surface material | Powder-coated, gray |
| Housing material | die-cast aluminum |

Mechanical properties

| | |
|------------------------------|---------|
| Mechanical data | |
| Type of the screw connection | 1x Pg16 |
| Locking type | Pin |

Cable/line

| | |
|-----------------------------------|------------------|
| External cable diameter (Cable 1) | 7.5 mm ... 15 mm |
|-----------------------------------|------------------|

Environmental and real-life conditions

HC-D 15-TFL-66/M1PG16S - Housing



1772337

<https://www.phoenixcontact.com/us/products/1772337>

Ambient conditions

| | |
|---------------------------------|-------------------|
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

HC-D 15-TFL-66/M1PG16S - Housing


1772337

<https://www.phoenixcontact.com/us/products/1772337>



Drawings

Dimensional drawing

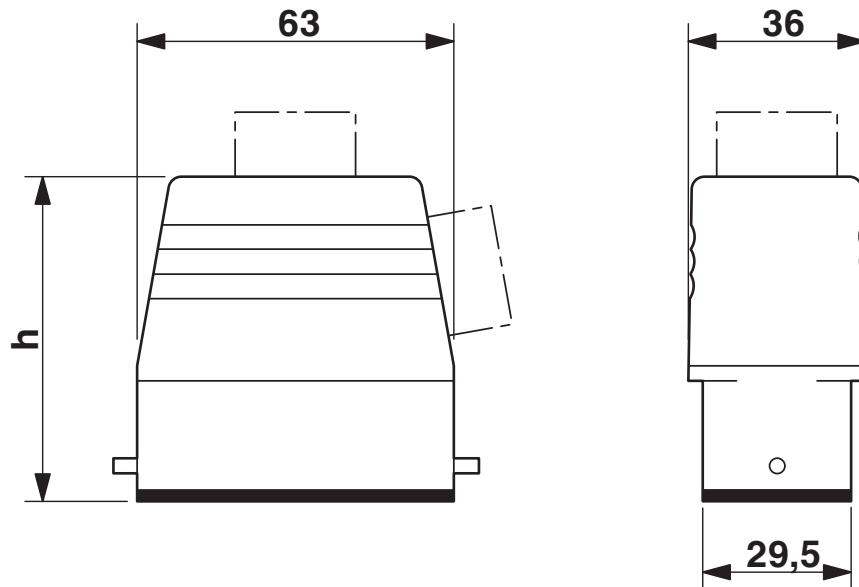

Dimensional drawing

HC-D 15-TFL-66/M1PG16S - Housing

1772337

<https://www.phoenixcontact.com/us/products/1772337>



Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440202 |
| ECLASS-13.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 7.0 | EC000437 |
|----------|----------|

HC-D 15-TFL-66/M1PG16S - Housing



1772337
<https://www.phoenixcontact.com/us/products/1772337>

Environmental product compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com