

HC-D 64-EBUC - Contact insert

1772515

<https://www.phoenixcontact.com/us/products/1772515>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON female insert, D64 series, 64-pos., crimp connection

Commercial data

Item number	1772515
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	BF61
Product key	BF7ABE
Catalog page	Page 440 (PC-2009)
GTIN	4017918037185
Weight per piece (including packing)	92.58 g
Weight per piece (excluding packing)	92.58 g
Customs tariff number	85366990
Country of origin	DE

HC-D 64-EBUC - Contact insert

1772515

<https://www.phoenixcontact.com/us/products/1772515>



Technical data

Notes

General	For HC-D64 housing, crimp contacts CK1,6-ED (crimp contacts not included in scope of supply)
---------	--

Mounting

Assembly instructions	- Use of HC-CST (1676857) coding pins and HC-CBU (1676860) coding sockets has been prescribed. Connectors may be plugged in only when there is no load/voltage.
-----------------------	--


Product properties

Type	D64
Product type	Contact insert with a fixed no. of positions
Number of positions	64
Connection profile	64+PE
Contact numbering	1 - 64

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

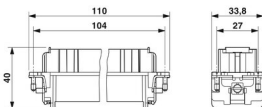Dimensional drawing	
Width	34 mm
Height	39.7 mm
Length	111 mm

Connection data

Connection technology

Connection technology	Crimp connection
Connection in acc. with standard	IEC / EN

Conductor connection

Conductor cross section	0.14 mm ² ... 2.5 mm ²
Connection cross section AWG	26 ... 14
Stripping length of the individual wire	8 mm 6 mm (2.5 mm ²)

Electrical properties

HC-D 64-EBUC - Contact insert



1772515

<https://www.phoenixcontact.com/us/products/1772515>

Rated voltage (III/3)	250 V
Rated surge voltage	4 kV
Rated current	10 A
Test voltage	4 kV AC

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PA

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations


Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Tests	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352

1772515

<https://www.phoenixcontact.com/us/products/1772515>

Drawings

Schematic diagram

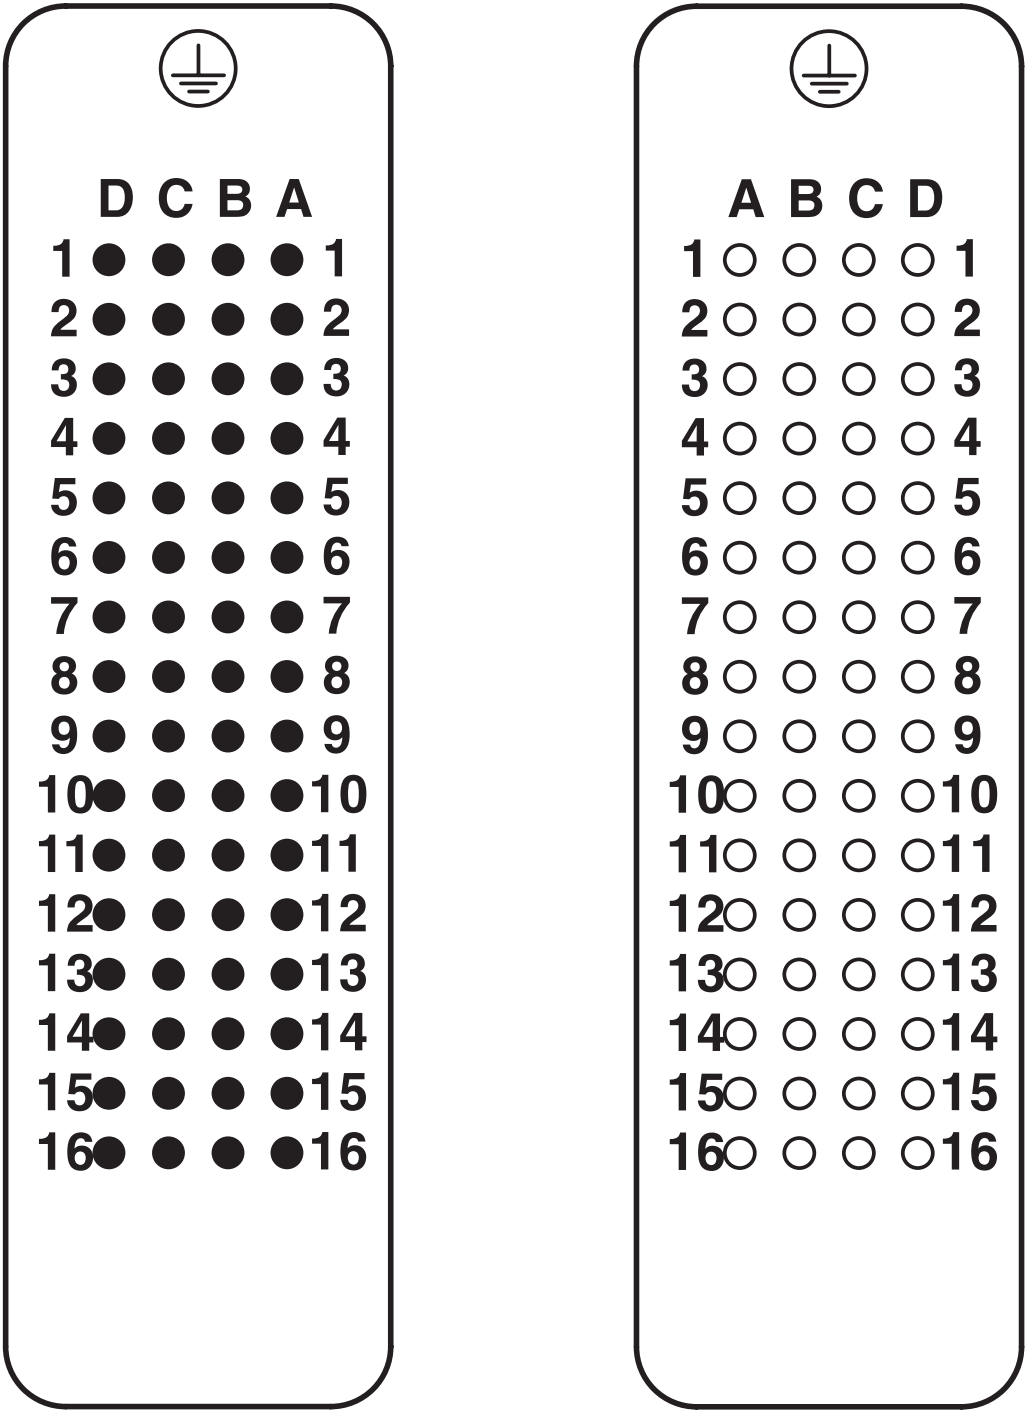

Connector pin assignment, connection side


HC-D 64-EBUC - Contact insert

1772515

<https://www.phoenixcontact.com/us/products/1772515>




Dimensional drawing

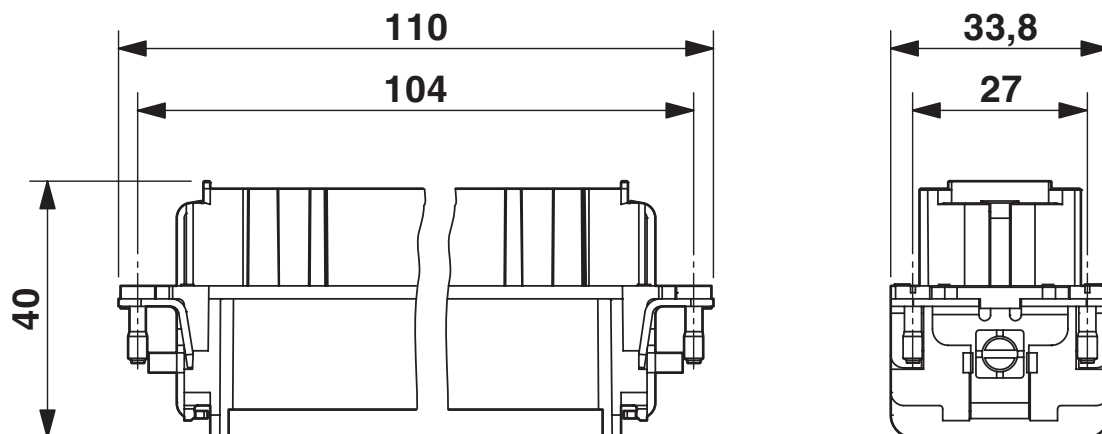

Female insert (turned contacts)

Dimensional drawing

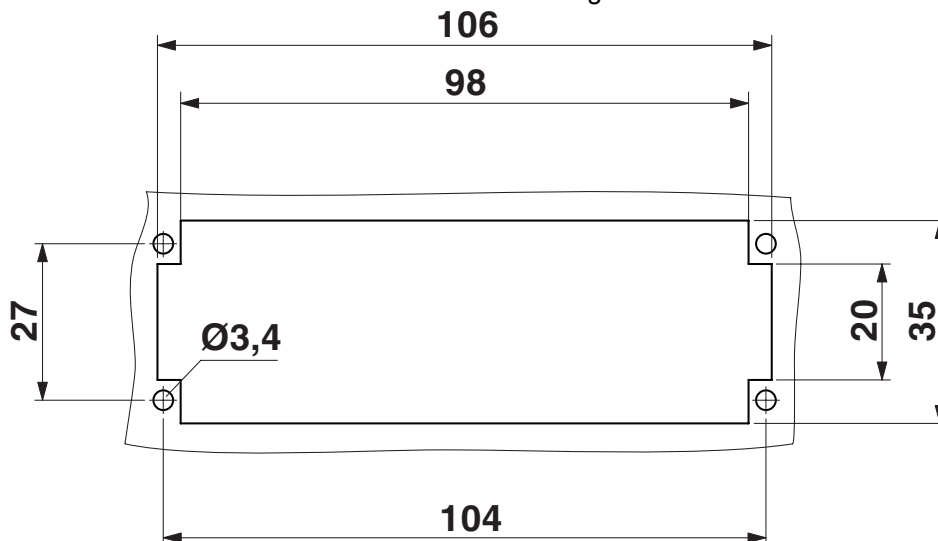


Mounting cutout

HC-D 64-EBUC - Contact insert

1772515

<https://www.phoenixcontact.com/us/products/1772515>

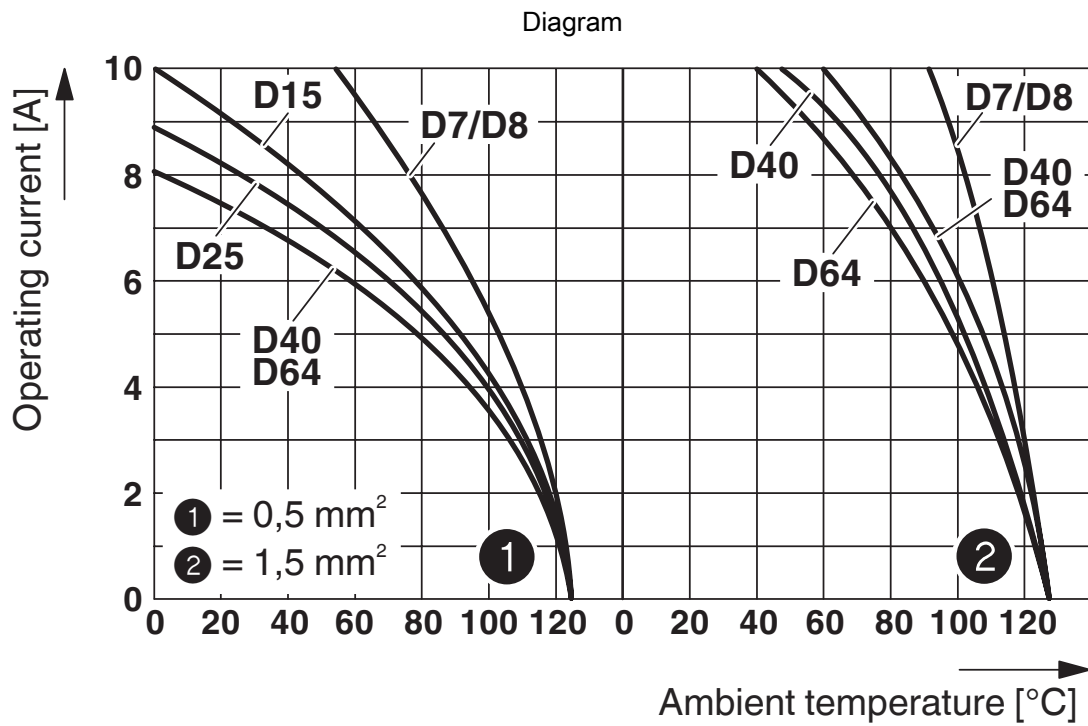

Derating diagram: HC-D...C series

HC-D 64-EBUC - Contact insert

1772515

<https://www.phoenixcontact.com/us/products/1772515>



Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-13.0	27440223

HC-D 64-EBUC - Contact insert



1772515

<https://www.phoenixcontact.com/us/products/1772515>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

HC-D 64-EBUC - Contact insert



1772515

<https://www.phoenixcontact.com/us/products/1772515>

Accessories

HC-B-PES - Screw

1604997

<https://www.phoenixcontact.com/us/products/1604997>

PE screw, for contact inserts HC-B / HC-BB / HC-DD / HC-D40 / HC-D64



HC-B-3PE - PE multiplier

1644326

<https://www.phoenixcontact.com/us/products/1644326>

PE multiplier, for 3 PE connections, for HC-B / HC-BB / HC-DD / HC-D40 / HC-D64 contact inserts



HC-D 64-EBUC - Contact insert

1772515

<https://www.phoenixcontact.com/us/products/1772515>



HC-CBU - Coding element

1676860

<https://www.phoenixcontact.com/us/products/1676860>



Coding socket for coding up to 16 connectors

HC-CB - Coding bolt

1772722

<https://www.phoenixcontact.com/us/products/1772722>



Coding pin, prevents mismatching of up to six connectors with an identical number of positions

HC-D 64-EBUC - Contact insert

1772515

<https://www.phoenixcontact.com/us/products/1772515>



HC-B-ZG - Strain relief clamp

1685327

<https://www.phoenixcontact.com/us/products/1685327>



Strain relief clamps contact inserts of series: B-, BB-, D 40, D 64, DD and HV, straight cable exit

HC-B-ZS - Strain relief clamp

1685330

<https://www.phoenixcontact.com/us/products/1685330>



Strain relief clamps contact inserts of series: B-, BB-, D 40, D 64, DD and HV, lateral cable exit

HC-D 64-EBUC - Contact insert

1772515

<https://www.phoenixcontact.com/us/products/1772515>



HC-CST - Coding element

1676857

<https://www.phoenixcontact.com/us/products/1676857>



Coding peg for coding up to 16 connectors

HC-SMR-B24 - DIN rail mounting frame

1687985

<https://www.phoenixcontact.com/us/products/1687985>



HEAVYCON DIN rail mounting frame, for contact inserts of type B24

HC-D 64-EBUC - Contact insert

1772515

<https://www.phoenixcontact.com/us/products/1772515>



HC-SMP 150-B24-AMQ - DIN rail mounting frame

1660944

<https://www.phoenixcontact.com/us/products/1660944>



HEAVYCON DIN rail mounting frame with panel mounting base with double locking latch, for contact inserts of type B24, 150 mm long

HC-B 24-ANDOCK - Docking frame

1586141

<https://www.phoenixcontact.com/us/products/1586141>



Docking frame for racks, for contact inserts of B24 type, with four M5 flat headed screws, rack balance x/y axis ± 1.5 mm

HC-D 64-EBUC - Contact insert

1772515

<https://www.phoenixcontact.com/us/products/1772515>



CK1,6-ED-BB - Dummy socket

1645888

<https://www.phoenixcontact.com/us/products/1645888>



Dummy socket for contact carrier with turned CK 1,6-ED.. female contacts

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com