

Surface Mount Aluminum Electrolytic Capacitors

SREL Series

MERITEK

FEATURE

- General Purpose Series
- Applications: Suitable for AV (TV, Video, Audio), Monitor/Computer, Home appliance, OA/HA/Communication, Industrial, Automobile, Meter.
- Load life: 105°C

Diameter (mm)	Load Life (Hours)
4.0 ~ 6.3	3000
8.0 ~ 10.0	5000



SPECIFICATIONS

Item	Characteristic								
Operating Temperature	-55°C ~ 105°C								
Rated Voltage	6.3VDC ~ 50VDC								
Nominal Capacitance	1 μF ~ 1000 μF, ±20% (at 20°C, 120Hz)								
Leakage Current	$I_L \leq 0.01CV$ or $3 \mu A$ whichever is greater after 2 minutes at 20°C I_L : Leakage Current (μA) C: Nominal Capacitance (μF) V: Rated Voltage (V)								
Ripple Current Coefficient, Frequency	Frequency (Hz)	120	1K	10K	100K	--			
	Coefficient	0.70	0.80	0.90	1.00	--			
Dissipation Factor at 20°C, 120Hz	Working Voltage (V)	6.3	10	16	25	35			
	Dissipation Factor	0.26	0.19	0.16	0.14	0.12			
Low Temperature Stability, Impedance Ratio at 120Hz	Working Voltage (V)	6.3	10	16	25	35			
	Z-25°C / Z+20°C	2	2	2	2	2			
	Z-40°C / Z+20°C	3	3	3	3	3			
Load Life	Capacitance	$\leq \pm 30\%$ of initial value		Apply Working Voltage for Rated Load Life / Temperature Stabilized at +20°C.					
	Dissipation Factor	$\leq 200\%$ of initial value							
	Leakage Current	\leq Initial specified value							
Shelf Life	Capacitance	$\leq \pm 30\%$ of initial value		After storage condition without voltage applied for 1000 hours at Rated Temperature, Stabilizing for 1 to 2 hours.					
	Dissipation Factor	$\leq 200\%$ of initial value							
	Leakage Current	\leq Initial specified value							
Resistance to Soldering Heat	Capacitance	$\leq \pm 20\%$ of initial value		For other procedures than those specified, Soldering iron method: Temperature: $260 \pm 5^\circ C$. Application time of soldering iron: 10 sec					
	Dissipation Factor	\leq specified value							
	Leakage Current	\leq specified value							

Surface Mount Aluminum Electrolytic Capacitors

SREL Series

MERITEK

STANDARD RATING

Rated Voltage (VDC)	Cap (μ F)	Case Size	DF Tan δ (%)	Ripple Current (mA/rms)	Impedance (Ω)
6.3	22	4x5.4	0.26	90	1.93
	33	4x5.4	0.26	90	1.93
	47	5x5.4	0.26	160	1.00
	100	6.3x5.4	0.26	240	0.52
	150	6.3x7.7	0.26	240	0.30
	220	6.3x5.4	0.26	240	0.52
	220	6.3x7.7	0.26	240	0.30
	220	8x10.2	0.26	600	0.26
	330	8x10.2	0.26	600	0.16
	470	8x10.2	0.26	600	0.16
	680	10x10.2	0.26	850	0.12
	1000	10x10.2	0.26	850	0.12
	22	4x5.4	0.19	90	1.93
	33	5x5.4	0.19	160	1.00
10	47	6.3x5.4	0.19	190	0.52
	100	6.3x5.4	0.19	190	0.52
	100	6.3x7.7	0.19	190	0.52
	150	6.3x5.4	0.19	190	0.52
	150	6.3x7.7	0.19	240	0.34
	220	6.3x7.7	0.19	240	0.34
	220	8x6.2	0.19	240	0.34
	220	8x10.2	0.19	600	0.16
	330	8x10.2	0.19	600	0.16
	470	8x10.2	0.19	600	0.16
	470	10x10.2	0.19	850	0.12
	680	10x10.2	0.19	850	0.12
	1000	10x10.2	0.19	850	0.12
	10	4x5.4	0.16	90	1.93
16	22	5x5.4	0.16	160	1.00
	33	6.3x5.4	0.16	240	0.52
	47	5x5.4	0.16	160	1.00
	47	6.3x5.4	0.16	240	0.52
	100	6.3x5.4	0.16	240	0.52
	100	6.3x7.7	0.16	280	0.34
	100	8x10.2	0.16	300	0.29
	150	6.3x7.7	0.16	280	0.34
	150	8x10.2	0.16	370	0.22
	220	8x10.2	0.16	370	0.22
	330	8x10.2	0.16	600	0.16
	470	8x10.2	0.16	600	0.16
	470	10x10.2	0.16	850	0.12
	680	10x10.2	0.16	850	0.12

Note: Ripple Current measured at 100KHz, 105°C, Impedance at 20°C 100KHz


Rated Voltage (VDC)	Cap (μ F)	Case Size	DF Tan δ (%)	Ripple Current (mA/rms)	Impedance (Ω)
25	10	4x5.4	0.14	90	1.93
	22	5x5.4	0.14	160	1.00
	33	6.3x5.4	0.14	240	0.52
	47	6.3x5.4	0.14	240	0.52
	68	6.3x7.7	0.14	280	0.34
	100	6.3x7.7	0.14	300	0.34
	150	8x10.2	0.14	600	0.16
	220	8x10.2	0.14	600	0.16
	330	10x10.2	0.14	850	0.12
	470	10x10.2	0.14	850	0.12
	4.7	4x5.4	0.12	90	1.93
	10	5x5.4	0.12	160	1.00
	15	5x5.4	0.12	160	1.00
	22	5x5.4	0.12	160	1.00
35	33	6.3x5.4	0.12	240	0.52
	47	6.3x5.4	0.12	240	0.52
	47	6.3x7.7	0.12	280	0.34
	47	8x6.2	0.12	300	0.34
	47	8x10.2	0.12	280	0.34
	68	6.3x7.7	0.12	280	0.34
	100	6.3x7.7	0.12	230	0.40
	100	8x10.2	0.12	600	0.16
	100	10x10.2	0.12	670	0.16
	150	8x10.2	0.12	600	0.16
	150	10x10.2	0.12	850	0.12
	220	8x10.2	0.12	600	0.16
	220	10x10.2	0.12	850	0.12
	330	10x10.2	0.12	850	0.12
50	1	4x5.4	0.12	60	5.00
	2.2	4x5.4	0.12	60	5.00
	3.3	4x5.4	0.12	60	5.00
	4.7	5x5.4	0.12	95	4.00
	10	6.3x5.4	0.12	140	2.00
	22	6.3x5.4	0.12	70	2.00
	22	6.3x7.7	0.12	230	1.30
	33	8x10.2	0.12	350	0.34
	47	6.3x7.7	0.12	230	1.30
	47	8x10.2	0.12	350	0.34
	47	10x10.2	0.12	670	0.18
	68	8x10.2	0.12	350	0.34
	68	10x10.2	0.12	670	0.18
	100	8x10.2	0.12	350	0.34
	100	10x10.2	0.12	670	0.18
	150	10x10.2	0.12	670	0.18
	220	10x10.2	0.12	670	0.18

Surface Mount Aluminum Electrolytic Capacitors

SREL Series

MERITEK

DIMENSION

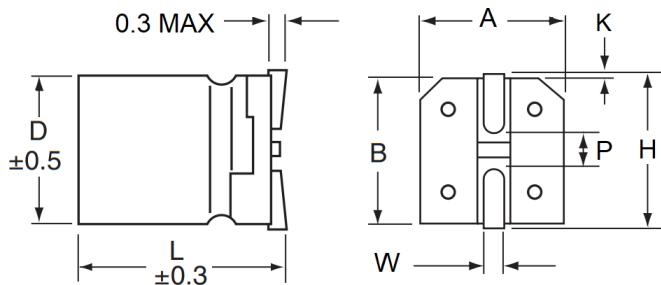

Unit :mm

D	L	A ±0.2	B Max	H Max	W	P ±0.2	K
4.0 (D)	5.4	4.3	5.0	5.5	0.65±0.1	1.0	0.35+0.15/-0.2
5.0 (E)	5.4	5.3	6.0	6.5	0.65±0.1	1.5	0.35+0.15/-0.2
6.3 (F)	5.4	6.6	7.3	7.8	0.65±0.1	2.1	0.35+0.15/-0.2
6.3 (F)	7.7	6.6	7.3	7.8	0.65±0.1	2.1	0.35+0.15/-0.2
8.0 (H)	6.2	8.3	9.0	9.5	0.65±0.1	2.2	0.35+0.15/-0.2
8.0 (H)	10.2	8.3	9.1	10.0	0.90±0.2	3.1	0.70±0.20
10.0 (J)	10.2	10.3	11.1	12.0	0.90±0.2	4.6	0.70±0.20

PART NUMBERING SYSTEM

SREL 1H 221M J102

(1) (2) (3) (4)

No	Item	Code	Description		
(1)	Meritek Series	SREL	Aluminum Electrolytic Capacitors, SMD type, 3000 ~ 5000 Hrs 105°C		
(2)	Rated Voltage	1H	50VDC		
(3)	Capacitance	221M	220µF ±20% (M)		
(4)	Size Code	J102	First two digit: significant, Third: Multiplier		
			10x10.2mm		
			DxL (mm)		

Voltage	4	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	500
Code	0G	0J	1A	1C	1E	1V	1H	1J	2A	2C	2D	2E	2V	2G	2W	2H

Diameter	4	5	6.3	8	10	12.5	14.5	16	18	20	22	25
Code	D	E	F	H	J	K	U	L	M	N	P	Q

LEGACY PART NUMBERING SYSTEM

SREL 50V 221M J102

(1) (2) (3) (4)

No	(1)	(2)	(3)	(4)
Item	Meritek Series	Rated Voltage	Rated Capacitance	Size Code

*Specifications subject to change without notice.