

DFLK-D15 SUB/B - Interface module

2280307

<https://www.phoenixcontact.com/us/products/2280307>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



The VARIOFACE feed-through module implements a 1:1 connection between screw connection terminal blocks and a D-SUB miniature socket strip (number of positions: 15). A separate ground tap is available.

Your advantages

- 9-pos. ... 50-pos.
- 9 to 37-pos.: separate ground tap
- 50-pos.: no ground tap
- In accordance with IEC 60807-2
- Screw connection
- 1:1 connection
- D-SUB 4-40 UNC thread

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 2280307 |
| Packing unit | 1 pc |
| Minimum order quantity | 5 pc |
| Sales key | C422 |
| Product key | CK2225 |
| Catalog page | Page 556 (C-5-2019) |
| GTIN | 4017918054410 |
| Weight per piece (including packing) | 56.36 g |
| Weight per piece (excluding packing) | 0.64 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

DFLK-D15 SUB/B - Interface module



2280307

<https://www.phoenixcontact.com/us/products/2280307>

Technical data

Product properties

| | |
|---------------------|------------------|
| Product type | Interface module |
| Product family | VARIOFACE |
| Number of positions | 15 |

Insulation characteristics

| | |
|------------|-----------------------|
| Insulation | Functional insulation |
|------------|-----------------------|

Insulation characteristics: Air clearances and creepage distances

| | |
|----------------------|-----------------------|
| Insulation | Functional insulation |
| Overvoltage category | II |
| Pollution degree | 2 |

Electrical properties

| | |
|-------------------------|-------------------------------|
| Operating voltage (AC) | $\leq 30 \text{ V AC}$ |
| Operating voltage (DC) | $\leq 60 \text{ V DC}$ |
| Current (per branch) | $\leq 2.5 \text{ A}$ |
| Current (Total current) | $\leq 37.5 \text{ A (50 °C)}$ |

Air clearances and creepage distances

| | |
|--------------------------|--------------------------------|
| Rated insulation voltage | 125 V |
| Rated surge voltage | 1.2 kV (1.2/50 μs) |

Connection data

Connection 1 (control level)

| | |
|----------------------------------|--------------------|
| Connection in acc. with standard | IEC 60807-2 |
| Connection method | D-SUB socket strip |
| Screw thread | UNC 4-40 |
| Number of connections | 1 |
| Number of positions | 15 |
| Insertion/withdrawal cycles | > 500 |
| Pitch | 2.74 mm |

Connection 2 (field level)

| | |
|----------------------------------|---------------------------------------------|
| Connection method | Screw connection |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Number of positions | 16 |
| Conductor cross section rigid | 0.2 mm ² ... 4 mm ² |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section AWG | 24 ... 12 |

Signaling

DFLK-D15 SUB/B - Interface module



2280307

<https://www.phoenixcontact.com/us/products/2280307>

| | |
|------------------------|----|
| Status display present | No |
|------------------------|----|

Dimensions

Item dimensions

| | |
|--------|----------|
| Width | 39.88 mm |
| Height | 58.4 mm |
| Depth | 33.07 mm |

Material specifications

| | |
|-----------------------------|-----------------------------|
| Housing insulation material | Polyamide PA non-reinforced |
|-----------------------------|-----------------------------|

Environmental and real-life conditions

Ambient conditions

| | |
|----------------------------------------------|------------------|
| Degree of protection (Module) | IP20 |
| Degree of protection (Installation location) | ≥ IP54 |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Altitude | ≤ 2000 m |

Approvals

UKCA

| | |
|-------------|----------------|
| Certificate | UKCA-compliant |
|-------------|----------------|

Standards and regulations

Air clearances and creepage distances

| | |
|-----------------------|----------------|
| Standards/regulations | EN IEC 60664-1 |
|-----------------------|----------------|


Mounting

| | |
|-------------------|---------------|
| Mounting type | Rear mounting |
| Mounting position | any |

Notes

| | |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General | For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met. |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Drawings

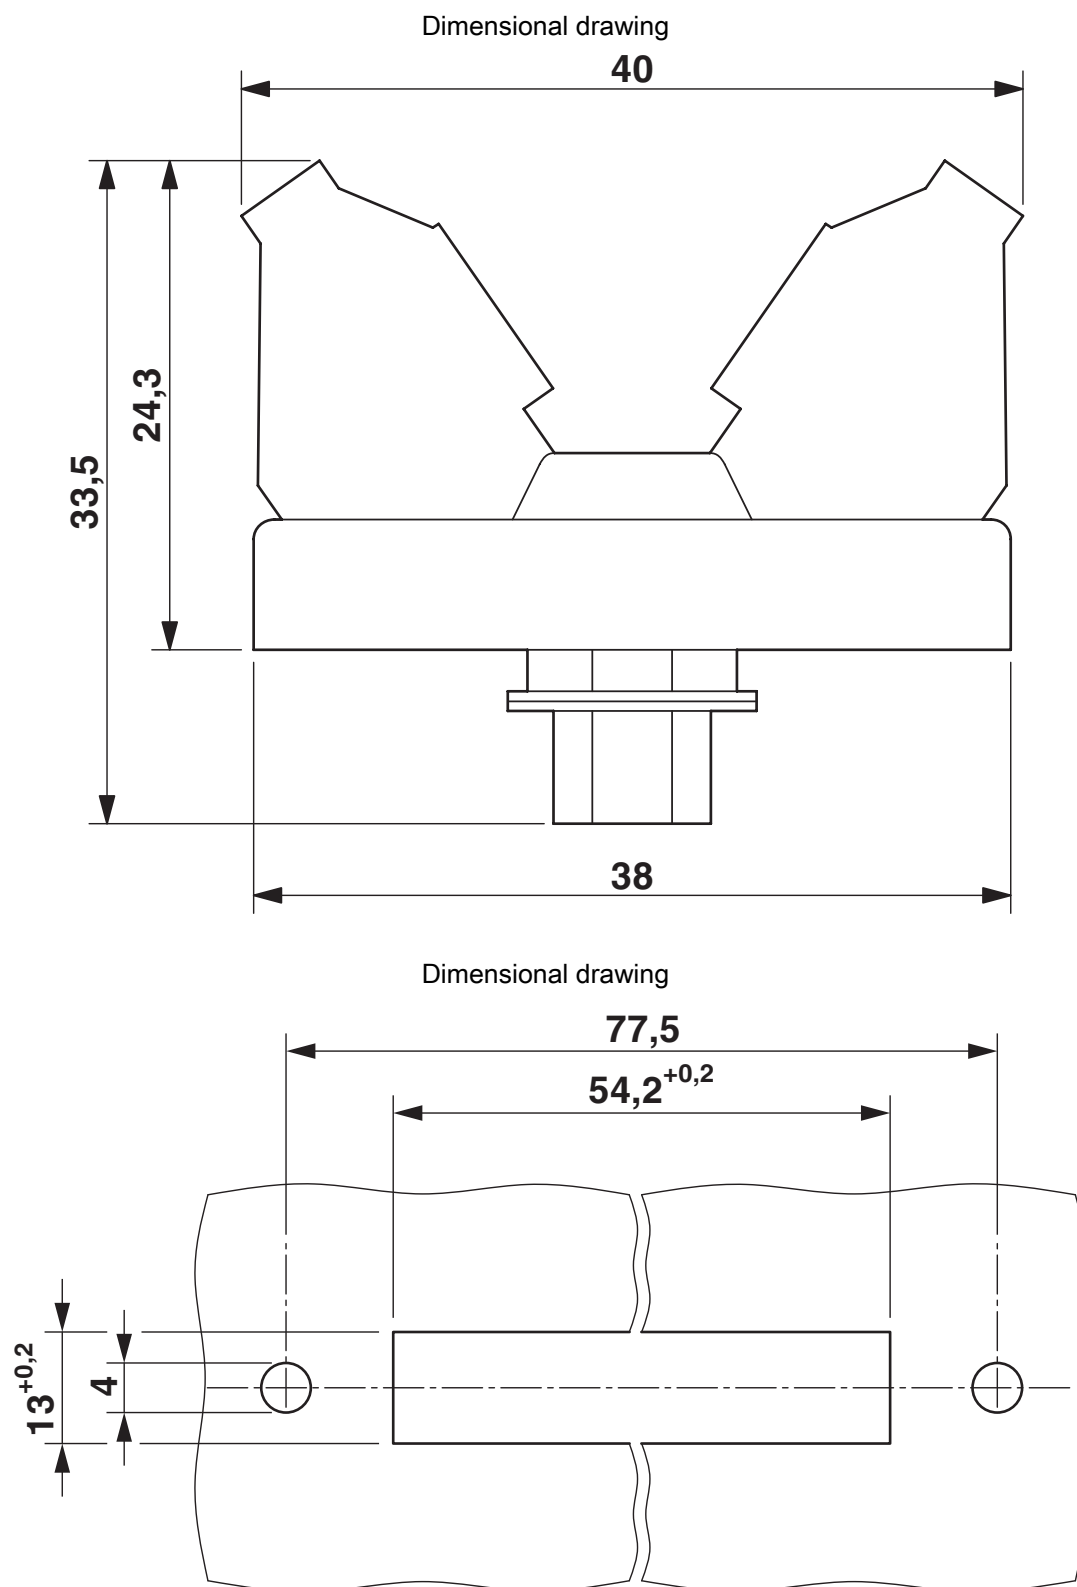


DFLK-D15 SUB/B - Interface module

2280307

<https://www.phoenixcontact.com/us/products/2280307>



Dimensional drawing

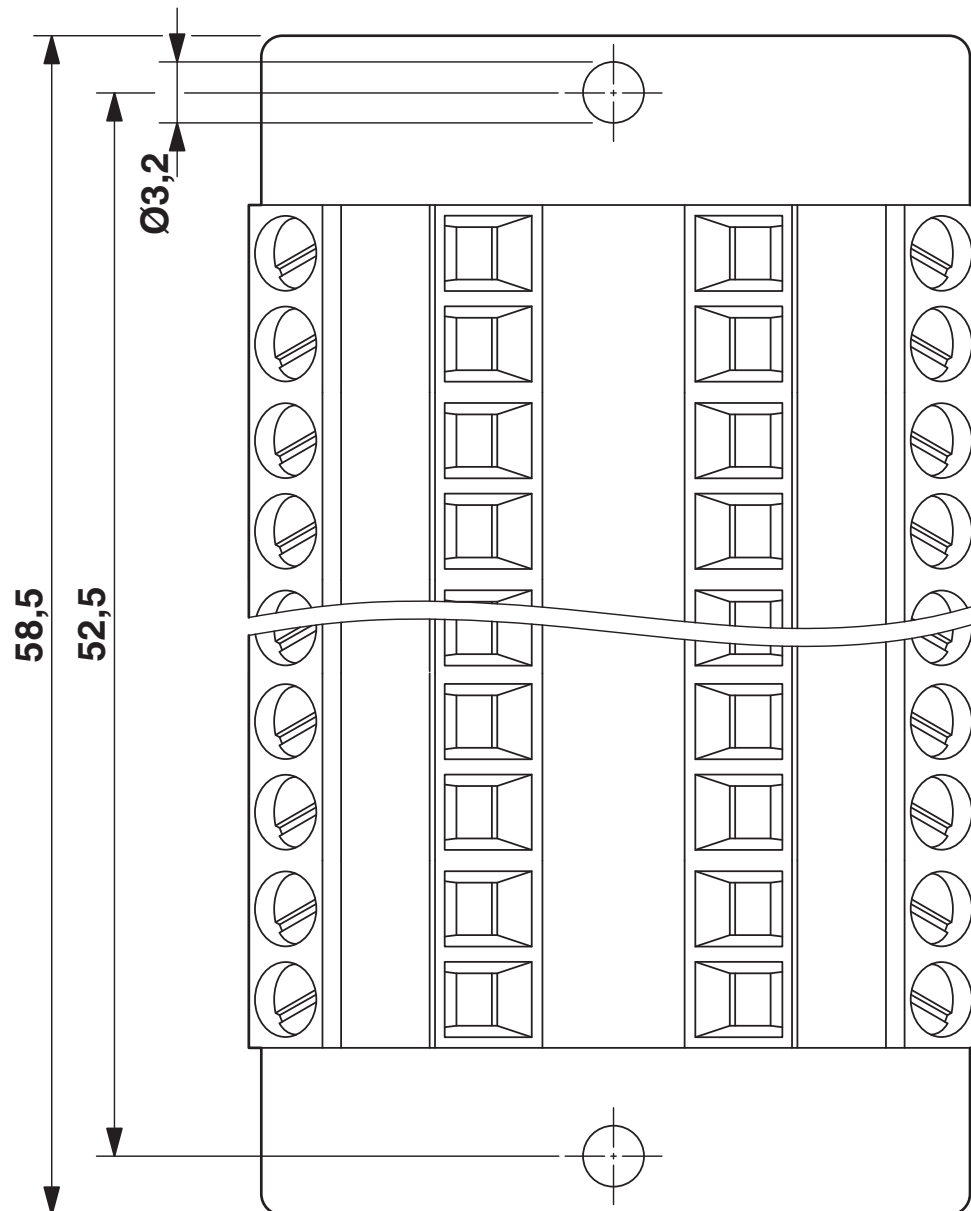

DFLK-D15 SUB/B - Interface module


2280307


<https://www.phoenixcontact.com/us/products/2280307>



Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2280307>

| | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  cUL Recognized Approval ID: FILE E 60425 | | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 125 V | 2.5 A | 30 - 12 | - |

| | | | | |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|  UL Recognized Approval ID: FILE E 60425 | | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 125 V | 2.5 A | 30 - 12 | - |

| | | | | |
|-------------------------|--|--|--|--|
| cULus Recognized | | | | |
|-------------------------|--|--|--|--|

DFLK-D15 SUB/B - Interface module



2280307

<https://www.phoenixcontact.com/us/products/2280307>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141152 |
| ECLASS-13.0 | 27141152 |
| ECLASS-12.0 | 27141152 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC002780 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

DFLK-D15 SUB/B - Interface module



2280307

<https://www.phoenixcontact.com/us/products/2280307>

Environmental product compliance

| | |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

DFLK-D15 SUB/B - Interface module



2280307

<https://www.phoenixcontact.com/us/products/2280307>

Accessories

CABLE D-SUB-S/.../.../... - Cable

2302340

<https://www.phoenixcontact.com/us/products/2302340>



Shielded round cable, assembled with one D-SUB female and pin strip (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

CABLE D-SUB-S-S-S/.../.../... - Cable

2302434

<https://www.phoenixcontact.com/us/products/2302434>



Shielded round cable, assembled with two D-SUB pin strips (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

DFLK-D15 SUB/B - Interface module



2280307

<https://www.phoenixcontact.com/us/products/2280307>

CABLE-D15SUB/B/S/ 50/KONFEK/S - Cable

2302052

<https://www.phoenixcontact.com/us/products/2302052>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 0.5 m

CABLE-D15SUB/B/S/100/KONFEK/S - Cable

2302065

<https://www.phoenixcontact.com/us/products/2302065>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 1 m

DFLK-D15 SUB/B - Interface module



2280307

<https://www.phoenixcontact.com/us/products/2280307>

CABLE-D15SUB/B/S/150/KONFEK/S - Cable

2302078

<https://www.phoenixcontact.com/us/products/2302078>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 1.5 m

CABLE-D15SUB/B/S/200/KONFEK/S - Cable

2302081

<https://www.phoenixcontact.com/us/products/2302081>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 2 m

DFLK-D15 SUB/B - Interface module



2280307

<https://www.phoenixcontact.com/us/products/2280307>

CABLE-D15SUB/B/S/300/KONFEK/S - Cable

2302094

<https://www.phoenixcontact.com/us/products/2302094>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 3 m

CABLE-D15SUB/B/S/400/KONFEK/S - Cable

2302104

<https://www.phoenixcontact.com/us/products/2302104>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 4 m

DFLK-D15 SUB/B - Interface module

2280307

<https://www.phoenixcontact.com/us/products/2280307>



CABLE-D15SUB/B/S/600/KONFEK/S - Cable

2302117

<https://www.phoenixcontact.com/us/products/2302117>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 6 m

CABLE-D15SUB/B/S/HF/S/ 1,0M - Cable

1066600

<https://www.phoenixcontact.com/us/products/1066600>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 1 m

DFLK-D15 SUB/B - Interface module



2280307

<https://www.phoenixcontact.com/us/products/2280307>

CABLE-D15SUB/B/S/HF/S/ 2,0M - Cable

1066602

<https://www.phoenixcontact.com/us/products/1066602>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 2 m

CABLE-D15SUB/B/S/HF/S/ 3,0M - Cable

1066603

<https://www.phoenixcontact.com/us/products/1066603>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: 3 m

DFLK-D15 SUB/B - Interface module

2280307

<https://www.phoenixcontact.com/us/products/2280307>



CABLE-D15SUB-B-S-HF-S/... - Cable

1075565

<https://www.phoenixcontact.com/us/products/1075565>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 15-position); connection 2: D-SUB pin strip (1x 15-position); cable length: variable

CABLE-D-15SUB/M/OE/0,25/S/0,5M - Cable

2926438

<https://www.phoenixcontact.com/us/products/2926438>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 15-position); cable length: 0.5 m

DFLK-D15 SUB/B - Interface module

2280307

<https://www.phoenixcontact.com/us/products/2280307>



CABLE-D-15SUB/M/OE/0,25/S/1,0M - Cable

2926441

<https://www.phoenixcontact.com/us/products/2926441>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 15-position); cable length: 1 m

CABLE-D-15SUB/M/OE/0,25/S/1,5M - Cable

2926454

<https://www.phoenixcontact.com/us/products/2926454>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 15-position); cable length: 1.5 m

DFLK-D15 SUB/B - Interface module

2280307

<https://www.phoenixcontact.com/us/products/2280307>



CABLE-D-15SUB/M/OE/0,25/S/2,0M - Cable

2926467

<https://www.phoenixcontact.com/us/products/2926467>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 15-position); cable length: 2 m

CABLE-D-15SUB/M/OE/0,25/S/3,0M - Cable

2926470

<https://www.phoenixcontact.com/us/products/2926470>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 15-position); cable length: 3 m

DFLK-D15 SUB/B - Interface module



2280307

<https://www.phoenixcontact.com/us/products/2280307>

CABLE-D-15SUB/M/OE/0,25/S/4,0M - Cable

2926483

<https://www.phoenixcontact.com/us/products/2926483>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 15-position); cable length: 4 m

CABLE-D-15SUB/M/OE/0,25/S/6,0M - Cable

2926496

<https://www.phoenixcontact.com/us/products/2926496>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 15-position); cable length: 6 m

DFLK-D15 SUB/B - Interface module

2280307

<https://www.phoenixcontact.com/us/products/2280307>



CABLE-D-15SUB-M-OE-0,25-S/... - Cable

2900910

<https://www.phoenixcontact.com/us/products/2900910>



Assembled shielded round cable; connection 1: Single wires (15-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 15-position); cable length: variable

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com