


# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE module, with screw connection and D-Subminiature pin strip, for mounting on NS 35/7.5 or NS 32, 9-pos.

## Commercial data

Item number	2281128
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C422
Product key	CK2222
Catalog page	Page 248 (IF-2007)
GTIN	4017918054571
Weight per piece (including packing)	68 g
Weight per piece (excluding packing)	61.186 g
Customs tariff number	85369010
Country of origin	DE

# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## Technical data

### Product properties

Product type	Interface module
Product family	VARIOFACE

### Insulation characteristics

Insulation	Functional insulation
------------	-----------------------

### Insulation characteristics: Air clearances and creepage distances

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

### Electrical properties

Operating voltage (AC)	≤ 30 V AC
Operating voltage (DC)	≤ 60 V DC
Current (per branch)	≤ 2.5 A
Current (Total current)	≤ 22.5 A

### Air clearances and creepage distances

Rated insulation voltage	125 V
Rated surge voltage	1.2 kV (1.2/50 μs)

### Connection data

#### Connection 1 (control level)

Connection in acc. with standard	IEC 60807-2
Connection method	D-SUB pin strip
Screw thread	UNC 4-40
Number of connections	1
Number of positions	9
Insertion/withdrawal cycles	> 500
Pitch	2.74 mm

#### Connection 2 (field level)

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Number of positions	10
Conductor cross section rigid	0.2 mm² ... 4 mm²
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section AWG	24 ... 12

### Signaling

Status display present	No
------------------------	----

# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## Dimensions

### Item dimensions

Width	33.75 mm
Height	77 mm
Depth	57.47 mm

## Material specifications

Housing insulation material	Polyamide 6 green
-----------------------------	-------------------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (Module)	IP20
Degree of protection (Installation location)	≥ IP54
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Altitude	≤ 2000 m

## Approvals

### UKCA

Certificate	UKCA-compliant
-------------	----------------

## Standards and regulations

### Air clearances and creepage distances

Standards/regulations	EN IEC 60664-1
-----------------------	----------------

## Mounting

Mounting type	DIN rail mounting
Mounting position	any

## Notes

General	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
---------	--

# FLKM-D 9 SUB/S - Interface module


2281128

<https://www.phoenixcontact.com/us/products/2281128>



## Drawings

Circuit diagram

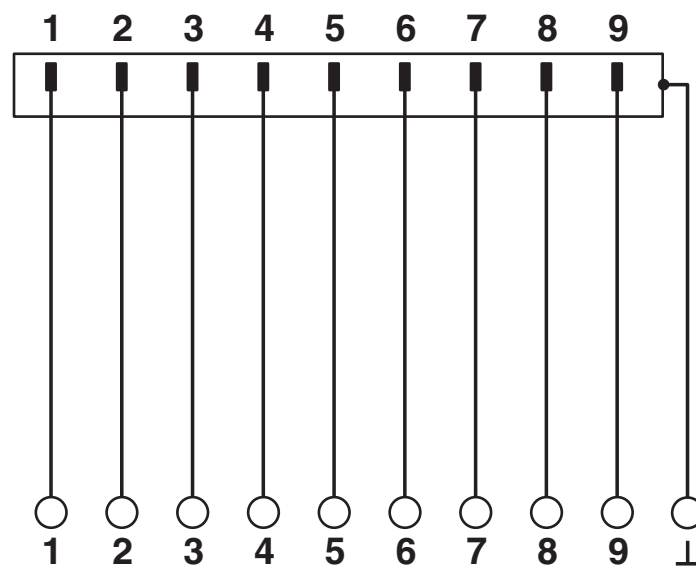

# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2281128>

cUL Recognized Approval ID: FILE E 118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Field wiring	125 V	2.5 A	30 - 12	-

UL Recognized Approval ID: FILE E 118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Field wiring	125 V	2.5 A	30 - 12	-

cULus Recognized				
------------------	--	--	--	--

# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## Classifications

### ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

### ETIM

ETIM 8.0	EC002780
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## Accessories

### CABLE D-SUB-S/.../.../... - Cable

2302340

<https://www.phoenixcontact.com/us/products/2302340>



Shielded round cable, assembled with one D-SUB female and pin strip (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

---

### CABLE D-SUB-B-B-S/.../.../... - Cable

2302421

<https://www.phoenixcontact.com/us/products/2302421>



Shielded round cable, assembled with two D-SUB female strips (9-, 15-, 25-, 37-, or 50-pos.), variable cable length



# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## CABLE-D 9SUB/B/S/ 50/KONFEK/S - Cable

2299987

<https://www.phoenixcontact.com/us/products/2299987>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 0.5 m

---

## CABLE-D 9SUB/B/S/100/KONFEK/S - Cable

2299990

<https://www.phoenixcontact.com/us/products/2299990>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 1 m

# FLKM-D 9 SUB/S - Interface module

2281128

<https://www.phoenixcontact.com/us/products/2281128>



## CABLE-D 9SUB/B/S/150/KONFEK/S - Cable

2300009

<https://www.phoenixcontact.com/us/products/2300009>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 1.5 m

---

## CABLE-D 9SUB/B/S/200/KONFEK/S - Cable

2302010

<https://www.phoenixcontact.com/us/products/2302010>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 2 m

# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## CABLE-D 9SUB/B/S/300/KONFEK/S - Cable

2302023

<https://www.phoenixcontact.com/us/products/2302023>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 3 m

---

## CABLE-D 9SUB/B/S/400/KONFEK/S - Cable

2302036

<https://www.phoenixcontact.com/us/products/2302036>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 4 m

# FLKM-D 9 SUB/S - Interface module

2281128

<https://www.phoenixcontact.com/us/products/2281128>



## CABLE-D 9SUB/B/S/600/KONFEK/S - Cable

2302049

<https://www.phoenixcontact.com/us/products/2302049>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 6 m

---

## CABLE-D 9SUB/B/S/HF/S/ 1,0M - Cable

1066591

<https://www.phoenixcontact.com/us/products/1066591>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 1 m

# FLKM-D 9 SUB/S - Interface module

2281128

<https://www.phoenixcontact.com/us/products/2281128>



## CABLE-D 9SUB/B/S/HF/S/ 2,0M - Cable

1066592

<https://www.phoenixcontact.com/us/products/1066592>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 2 m

---

## CABLE-D 9SUB/B/S/HF/S/ 3,0M - Cable

1066593

<https://www.phoenixcontact.com/us/products/1066593>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: 3 m

# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## CABLE-D 9SUB-B-S-HF-S/... - Cable

1075568

<https://www.phoenixcontact.com/us/products/1075568>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 9-position); connection 2: D-SUB pin strip (1x 9-position); cable length: variable

---

## CABLE-D- 9SUB/F/OE/0,25/S/0,5M - Cable

2926014

<https://www.phoenixcontact.com/us/products/2926014>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 9-position); cable length: 0.5 m

# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## CABLE-D- 9SUB/F/OE/0,25/S/1,0M - Cable

2926027

<https://www.phoenixcontact.com/us/products/2926027>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 9-position); cable length: 1 m

---

## CABLE-D- 9SUB/F/OE/0,25/S/1,5M - Cable

2926030

<https://www.phoenixcontact.com/us/products/2926030>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 9-position); cable length: 1.5 m

# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## CABLE-D- 9SUB/F/OE/0,25/S/2,0M - Cable

2926043

<https://www.phoenixcontact.com/us/products/2926043>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 9-position); cable length: 2 m

---

## CABLE-D- 9SUB/F/OE/0,25/S/3,0M - Cable

2926056

<https://www.phoenixcontact.com/us/products/2926056>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 9-position); cable length: 3 m



# FLKM-D 9 SUB/S - Interface module



2281128

<https://www.phoenixcontact.com/us/products/2281128>

## CABLE-D- 9SUB/F/OE/0,25/S/4,0M - Cable

2926069

<https://www.phoenixcontact.com/us/products/2926069>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 9-position); cable length: 4 m

---

## CABLE-D- 9SUB/F/OE/0,25/S/6,0M - Cable

2926072

<https://www.phoenixcontact.com/us/products/2926072>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 9-position); cable length: 6 m

# FLKM-D 9 SUB/S - Interface module

2281128

<https://www.phoenixcontact.com/us/products/2281128>



## CABLE-D- 9SUB-F-OE-0,25-S/... - Cable

2900903

<https://www.phoenixcontact.com/us/products/2900903>



Assembled shielded round cable; connection 1: Single wires (9-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB socket strip (1x 9-position); cable length: variable

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)