

# FLK-D25 SUB/B - Interface module



2283650

<https://www.phoenixcontact.com/us/products/2283650>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE module, with screw connection and D-Subminiature socket, for mounting on NS 35/7.5 or NS 32, 25-pos. (separate test socket for each channel)

## Commercial data

Item number	2283650
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	C422
Product key	CK2221
Catalog page	Page 248 (IF-2007)
GTIN	4017918055592
Weight per piece (including packing)	120.44 g
Weight per piece (excluding packing)	108.176 g
Customs tariff number	85369010
Country of origin	DE

# FLK-D25 SUB/B - Interface module

2283650

<https://www.phoenixcontact.com/us/products/2283650>



## Technical data

### Product properties

Product type	Interface module
Product family	VARIOFACE
Number of positions	25

### Insulation characteristics

Overvoltage category	II
Pollution degree	2

### Electrical properties

Nominal voltage $U_N$	125 V AC
Max. current carrying capacity per branch	2.5 A
Max. total current of all branches	37 A

### Supported controller ABB S800 I/O

Suitable I/O card	DI810
	DI811
	DI814
	DI818
	DI830
	DI831
	DI840
	DI885
	DO810
	DO814
	DO818
	DO840
	DP820
	AI810
	AI820
	AI830
	AI835
	AI845
	AO810
	AO820

## Connection data

### Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3

# FLK-D25 SUB/B - Interface module



2283650

<https://www.phoenixcontact.com/us/products/2283650>

Note	separate test socket for each channel
Conductor cross section rigid	0.2 mm² ... 4 mm²
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section AWG	24 ... 12

## Controller level

Connection method	D-SUB socket strip
Number of positions	25

## Signaling

Status display	No
Status display present	No

## Dimensions

### Item dimensions

Width	71 mm
Height	51.6 mm
Depth	51.2 mm

## Material specifications

Housing insulation material	Polyamide 6 green
-----------------------------	-------------------

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 50 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

## Standards and regulations

Standards/regulations	IEC 60664
	DIN EN 50178

## Mounting

Mounting type	DIN rail mounting
Mounting position	any

## Notes

General	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
---------	--

# FLK-D25 SUB/B - Interface module


2283650

<https://www.phoenixcontact.com/us/products/2283650>



## Drawings


Dimensional drawing

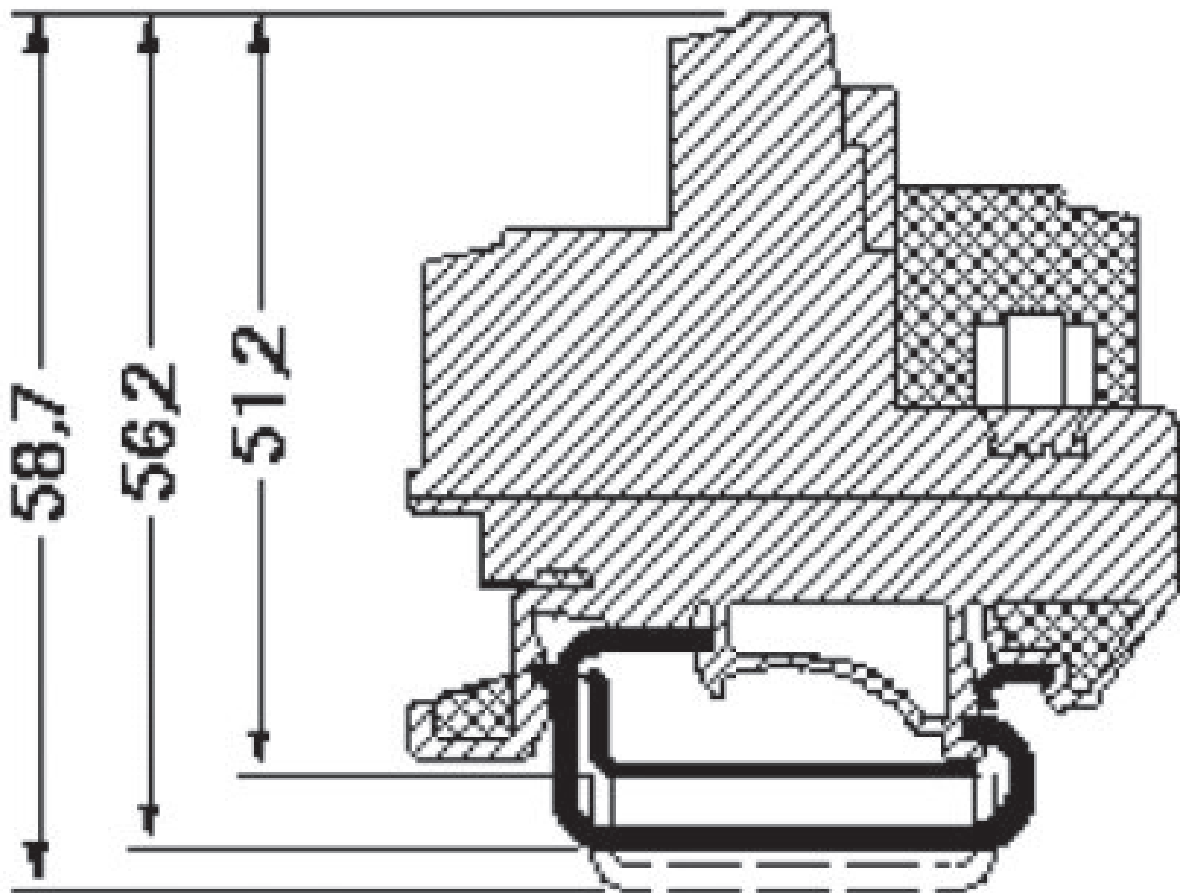

# FLK-D25 SUB/B - Interface module

2283650

<https://www.phoenixcontact.com/us/products/2283650>

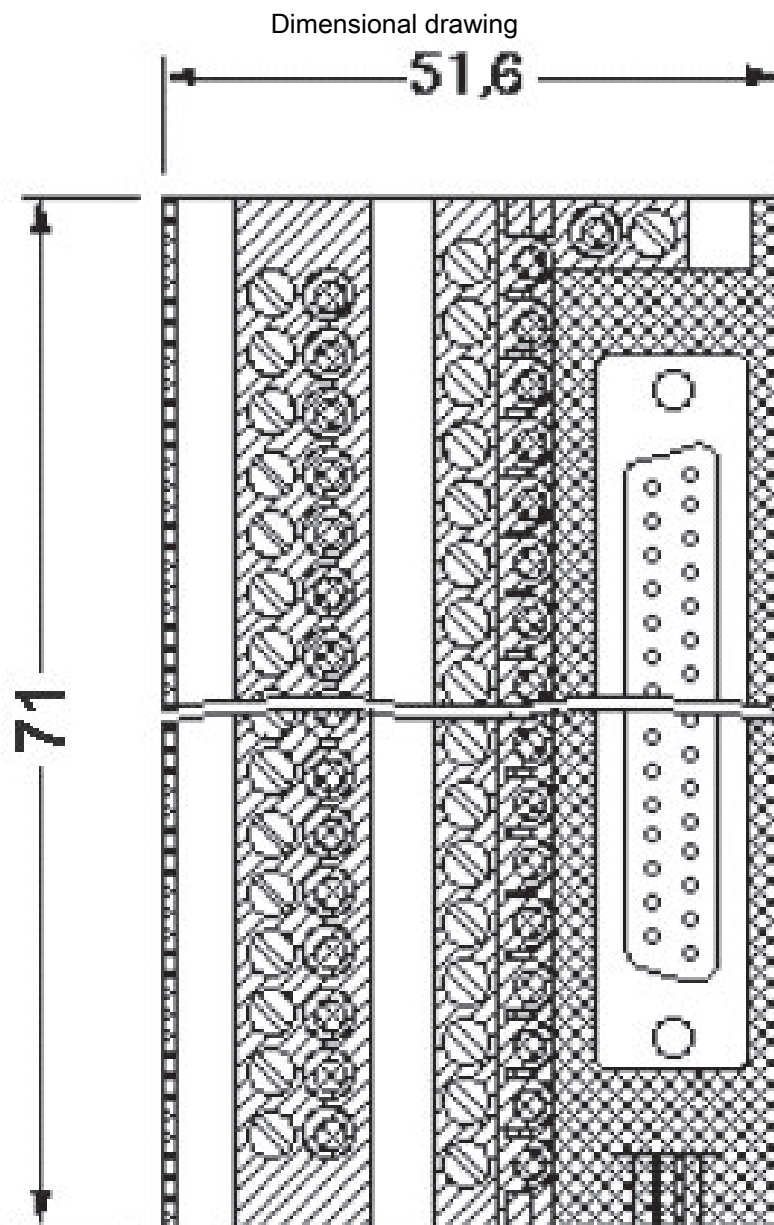

# FLK-D25 SUB/B - Interface module

2283650

<https://www.phoenixcontact.com/us/products/2283650>



## Classifications

### ECLASS

ECLASS-11.0	27141152
-------------	----------

# FLK-D25 SUB/B - Interface module

2283650

<https://www.phoenixcontact.com/us/products/2283650>



## Accessories

### RPS - Reducing plug

0201647

<https://www.phoenixcontact.com/us/products/0201647>



Reducing plug, number of positions: 1, color: gray

---

### CABLE D-SUB-S/.../.../... - Cable

2302340

<https://www.phoenixcontact.com/us/products/2302340>



Shielded round cable, assembled with one D-SUB female and pin strip (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

# FLK-D25 SUB/B - Interface module

2283650

<https://www.phoenixcontact.com/us/products/2283650>



## CABLE D-SUB-S-S-S/.../.../... - Cable

2302434

<https://www.phoenixcontact.com/us/products/2302434>



Shielded round cable, assembled with two D-SUB pin strips (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

---

## CABLE-D25SUB/B/S/ 50/KONFEK/S - Cable

2302120

<https://www.phoenixcontact.com/us/products/2302120>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 0.5 m



# FLK-D25 SUB/B - Interface module



2283650

<https://www.phoenixcontact.com/us/products/2283650>

## CABLE-D25SUB/B/S/100/KONFEK/S - Cable

2302133

<https://www.phoenixcontact.com/us/products/2302133>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 1 m

---

## CABLE-D25SUB/B/S/150/KONFEK/S - Cable

2302146

<https://www.phoenixcontact.com/us/products/2302146>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 1.5 m

# FLK-D25 SUB/B - Interface module



2283650

<https://www.phoenixcontact.com/us/products/2283650>

## CABLE-D25SUB/B/S/200/KONFEK/S - Cable

2302159

<https://www.phoenixcontact.com/us/products/2302159>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 2 m

---

## CABLE-D25SUB/B/S/300/KONFEK/S - Cable

2302162

<https://www.phoenixcontact.com/us/products/2302162>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 3 m

# FLK-D25 SUB/B - Interface module



2283650

<https://www.phoenixcontact.com/us/products/2283650>

## CABLE-D25SUB/B/S/400/KONFEK/S - Cable

2302175

<https://www.phoenixcontact.com/us/products/2302175>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 4 m

---

## CABLE-D25SUB/B/S/600/KONFEK/S - Cable

2302188

<https://www.phoenixcontact.com/us/products/2302188>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 6 m

# FLK-D25 SUB/B - Interface module



2283650

<https://www.phoenixcontact.com/us/products/2283650>

## CABLE-D25SUB/B/S/HF/S/ 1,0M - Cable

1066665

<https://www.phoenixcontact.com/us/products/1066665>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 1 m

---

## CABLE-D25SUB/B/S/HF/S/ 2,0M - Cable

1066666

<https://www.phoenixcontact.com/us/products/1066666>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 2 m

# FLK-D25 SUB/B - Interface module

2283650

<https://www.phoenixcontact.com/us/products/2283650>



## CABLE-D25SUB/B/S/HF/S/ 3,0M - Cable

1066667

<https://www.phoenixcontact.com/us/products/1066667>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: 3 m

---

## CABLE-D25SUB-B-S-HF-S/... - Cable

1075559

<https://www.phoenixcontact.com/us/products/1075559>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 25-position); connection 2: D-SUB pin strip (1x 25-position); cable length: variable

# FLK-D25 SUB/B - Interface module

2283650

<https://www.phoenixcontact.com/us/products/2283650>



## CABLE-D-25SUB/M/OE/0,25/S/0,5M - Cable

2926506

<https://www.phoenixcontact.com/us/products/2926506>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 0.5 m

---

## CABLE-D-25SUB/M/OE/0,25/S/1,0M - Cable

2926519

<https://www.phoenixcontact.com/us/products/2926519>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 1 m

# FLK-D25 SUB/B - Interface module

2283650

<https://www.phoenixcontact.com/us/products/2283650>



## CABLE-D-25SUB/M/OE/0,25/S/1,5M - Cable

2926522

<https://www.phoenixcontact.com/us/products/2926522>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 1.5 m

---

## CABLE-D-25SUB/M/OE/0,25/S/2,0M - Cable

2926535

<https://www.phoenixcontact.com/us/products/2926535>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 2 m

# FLK-D25 SUB/B - Interface module

2283650

<https://www.phoenixcontact.com/us/products/2283650>



## CABLE-D-25SUB/M/OE/0,25/S/3,0M - Cable

2926548

<https://www.phoenixcontact.com/us/products/2926548>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 3 m

---

## CABLE-D-25SUB/M/OE/0,25/S/4,0M - Cable

2926551

<https://www.phoenixcontact.com/us/products/2926551>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 4 m



# FLK-D25 SUB/B - Interface module

2283650

<https://www.phoenixcontact.com/us/products/2283650>



## CABLE-D-25SUB/M/OE/0,25/S/6,0M - Cable

2926564

<https://www.phoenixcontact.com/us/products/2926564>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 6 m

---

## CABLE-D-25SUB-M-OE-0,25-S/... - Cable

2900911

<https://www.phoenixcontact.com/us/products/2900911>



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: variable

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)