

FRONT-SFL 2,5/F32/ZD - Female connector strip



2285580

<https://www.phoenixcontact.com/us/products/2285580>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



19" socket strip, color: green, contact surface: Tin, number of positions: 32, product range: FRONT-SFL 2,5, pitch: 0 mm, type of packaging: packed in cardboard

Commercial data

Item number	2285580
Packing unit	1 pc
Minimum order quantity	10 pc
Sales key	AA08
Product key	AAHHAA
Catalog page	Page 791 (C-1-2013)
GTIN	4017918055981
Weight per piece (including packing)	120.18 g
Weight per piece (excluding packing)	120.18 g
Customs tariff number	85369010
Country of origin	PL

FRONT-SFL 2,5/F32/ZD - Female connector strip



2285580

<https://www.phoenixcontact.com/us/products/2285580>

Technical data

Product properties

Type	F
Product type	19" socket strip
Product family	FRONT-SFL 2,5
Number of positions	32
Pitch	0 mm

Electrical properties

Rated surge voltage (III/3)	4 kV
-----------------------------	------

Dimensions

Dimensional drawing	
Width	95 mm
Height	35.3 mm
Length	30.1 mm
Hole diameter	2.8 mm
Pitch	0 mm

Material specifications

Color	green
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA
Contact surface	Tin Sn

Standards and regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

Mounting

Connection method	Screw connection
-------------------	------------------

Packaging specifications

Type of packaging	packed in cardboard
-------------------	---------------------

FRONT-SFL 2,5/F32/ZD - Female connector strip


2285580

<https://www.phoenixcontact.com/us/products/2285580>



Drawings

Dimensional drawing

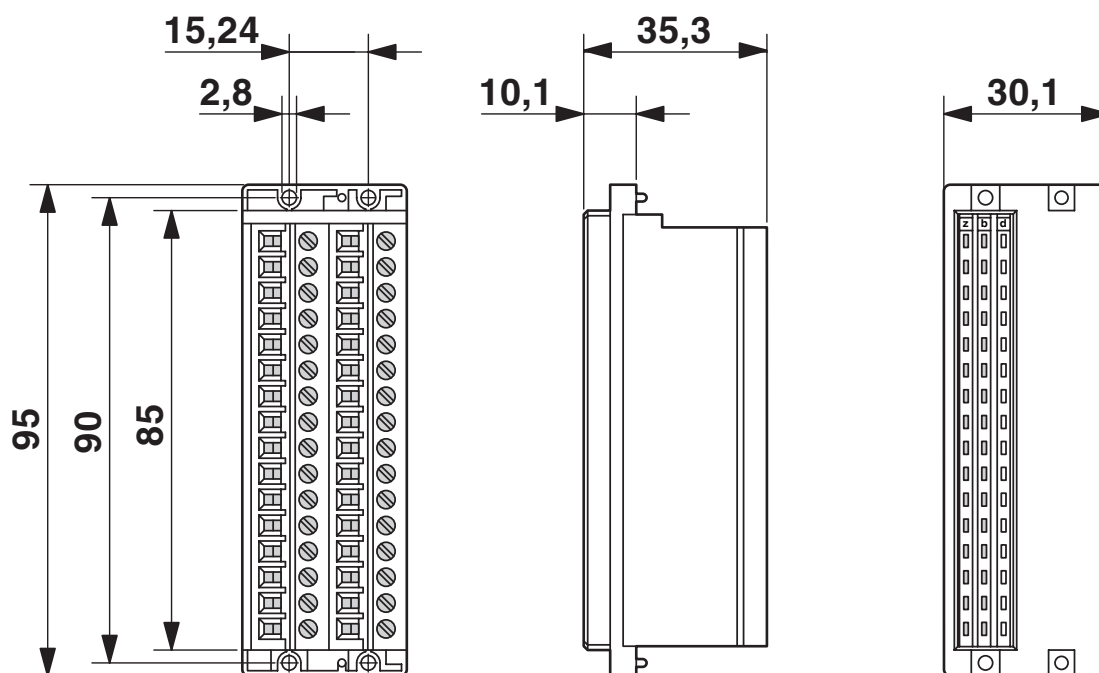

FRONT-SFL 2,5/F32/ZD - Female connector strip



2285580

<https://www.phoenixcontact.com/us/products/2285580>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2285580>



EAC

Approval ID: B.01687



cULus Recognized

Approval ID: E60425-19860303

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	250 V	4 A	30 - 12	-
Use group D				
	300 V	4 A	30 - 12	-

FRONT-SFL 2,5/F32/ZD - Female connector strip



2285580

<https://www.phoenixcontact.com/us/products/2285580>

Classifications

ECLASS

ECLASS-11.0	27460101
ECLASS-12.0	27460101
ECLASS-13.0	27460101

ETIM

ETIM 8.0	EC002643
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

FRONT-SFL 2,5/F32/ZD - Female connector strip



2285580

<https://www.phoenixcontact.com/us/products/2285580>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com