

# PSR-MC70-2NO-1DO-24DC-SC - Safety relays



2702094

<https://www.phoenixcontact.com/us/products/2702094>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop, safety doors, light grid up to SIL 1, Cat. 1, PL c, 1- or 2-channel operation, cross-circuit detection, can be retriggered, off delay/on delay 0.2 s ... 60 s, 2 enabling current paths,  $U_S = 24 \text{ V DC}$ , plug-in screw terminal block

## Your advantages

- Depending on the application, up to cat. 4/PL e in accordance with ISO 13849-1, SIL CL 3 in accordance with EN IEC 62061
- Low housing width of just 12.5 mm
- 1- and 2-channel control
- 2 enabling current paths, 1 digital signal output
- Manually monitored and automatic activation in a single device
- Depending on the application, up to Cat. 3/PL e in accordance with ISO 13849-1, SIL 3 in accordance with EN IEC 62061

## Commercial data

Item number	2702094
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN01
Product key	DNA181
Catalog page	Page 226 (C-6-2019)
GTIN	4046356952262
Weight per piece (including packing)	145.69 g
Weight per piece (excluding packing)	115.153 g
Customs tariff number	85371098
Country of origin	DE

# PSR-MC70-2NO-1DO-24DC-SC - Safety relays



2702094

<https://www.phoenixcontact.com/us/products/2702094>

## Technical data

### Notes

#### Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

### Product properties

Product type	Safety relays
Product family	PSRmini
Application	Emergency stop
	Safety door
	Light grid
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

#### Times

Typical response time	< 35 ms (automatic start)
	< 30 ms (manual, monitored start)
Typical release time	< 20 ms (when controlled via S12 (only for undelayed contact 13/14))
	< 5 ms (when interrupted via A1; applicative deactivation via A1/A2 is not permitted)
Delay time range	0.2 s ... 60 s $\pm 5\%$ (can be set for 27/28)
Restart time	< 1 s (Boot time)

### Electrical properties

Maximum power dissipation for nominal condition	3.58 W (at $U_S = 30\text{ V}$ , $I_L^2 = 72\text{ A}^2$ )
Nominal operating mode	100% operating factor

#### Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V AC
	250 V AC
Rated surge voltage/insulation	Basic insulation 4 kV: between all current paths and housing Safe isolation, reinforced insulation 6 kV: between (A1, A2, S11, S12, S21, S22, S34, M1) and enabling current path (13/14) between (A1, A2, S11, S12, S21, S22, S34, M1) and enabling current path (27/28) between enabling current paths

#### Supply

Designation	A1/A2
Rated control circuit supply voltage $U_S$	19.2 V DC ... 30 V DC
Rated control circuit supply voltage $U_S$	24 V DC -20 % / +25 %
Rated control supply current $I_S$	typ. 50 mA
Power consumption at $U_S$	typ. 1.2 W

# PSR-MC70-2NO-1DO-24DC-SC - Safety relays



2702094

<https://www.phoenixcontact.com/us/products/2702094>

Inrush current	typ. 25 A ( $\Delta t = 10 \mu s$ at $U_S$ )
Filter time	10 ms (For the logic. At A1 in the event of voltage dips at $U_S$ )
Protective circuit	Surge protection; Suppressor diode Protection against polarity reversal for rated control circuit supply voltage

## Input data

Digital: Sensor circuit (S12, S22)

Description of the input	safety-related sensor inputs
Number of inputs	2
Input voltage range "0" signal	0 V DC ... 5 V DC
Input current range "0" signal	0 mA ... 2 mA
Inrush current	< 11 mA (typically with $U_S$ )
Filter time	max. 3 ms (Test pulse width of low test pulses) min. 21 ms (Test pulse rate for low test pulse) Test pulse rate = 7 x Test pulse width
Concurrence	$\infty$
Limit frequency	min. 0 Hz max. 1 Hz
Max. permissible overall conductor resistance	150 $\Omega$
Current consumption	< 4.1 mA (typically with $U_S$ )

Digital: Start circuit (S34)

Description of the input	non-safety-related
Number of inputs	1
Inrush current	< 8.6 mA (typically with $U_S$ )
Filter time	max. 3 ms (Test pulse width of low test pulses) min. 21 ms (Test pulse rate for low test pulse) Test pulse rate = 7 x Test pulse width
Max. permissible overall conductor resistance	150 $\Omega$
Voltage at input/start and feedback circuit	24 V DC -20 % / +25 %
Current consumption	< 3.2 mA (typically with $U_S$ )

## Output data

Relay: Enabling current paths (13/14, 27/28)

Output description	safety-related N/O contacts
Number of outputs	1 (undelayed, single-channel) 1 (delayed, single-channel)
Contact switching type	2 enabling current paths
Contact material	AgSnO <sub>2</sub>
Switching voltage	min. 12 V AC/DC max. 250 V AC/DC (Observe the load curve)
Switching capacity	min. 60 mW
Inrush current	min. 3 mA

# PSR-MC70-2NO-1DO-24DC-SC - Safety relays



2702094

<https://www.phoenixcontact.com/us/products/2702094>

	max. 6 A
Limiting continuous current	6 A (observe derating)
Sq. Total current	72 A <sup>2</sup> (observe derating)
Mechanical service life	10x 10 <sup>6</sup> cycles
Output fuse	6 A gL/gG (N/O contact)
	4 A gL/gG (for low-demand applications)

Signal: M1

Output description	PNP
	non-safety-related
Number of outputs	1
Voltage	approx. 23 V DC (U <sub>S</sub> - 1 V)
Current	max. 100 mA
Maximum inrush current	500 mA ( $\Delta t = 1 \text{ ms}$ at U <sub>S</sub> )
Short-circuit protection	Yes

## Connection data

Connection technology

pluggable	yes
-----------	-----

Conductor connection

Connection method	Screw connection
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 12
Stripping length	7 mm
Screw thread	M3

## Signaling

Status display	5 x bi-color LED
----------------	------------------

## Dimensions

Width	12.5 mm
Height	112.2 mm
Depth	114.5 mm

## Material specifications

Housing material	Polyamide
------------------	-----------

## Characteristics

Safety data

Stop category	1
---------------	---

Safety data: EN ISO 13849

Category	1 (up to Cat. 3 depending on the application)
----------	---

# PSR-MC70-2NO-1DO-24DC-SC - Safety relays



2702094

<https://www.phoenixcontact.com/us/products/2702094>

Performance level (PL)	c (up to PL e depending on the application)
Safety data: IEC 61508 - High demand	
Safety Integrity Level (SIL)	1 (up to SIL 3 depending on the application)
Safety data: EN IEC 62061	
Safety Integrity Level (SIL)	1 (up to SIL 3 depending on the application)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-35 °C ... 60 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g
Vibration (operation)	10 Hz ... 150 Hz, 2g

## Approvals

### CE

Identification	CE-compliant
----------------	--------------

## Standards and regulations

### Air clearances and creepage distances between the power circuits

Standards/regulations	DIN EN 50178
-----------------------	--------------

## Mounting

Mounting type	DIN rail mounting
Assembly instructions	See derating curve
Mounting position	vertical or horizontal
Connection method	Screw connection


# PSR-MC70-2NO-1DO-24DC-SC - Safety relays

2702094


<https://www.phoenixcontact.com/us/products/2702094>

## Drawings

Circuit diagram

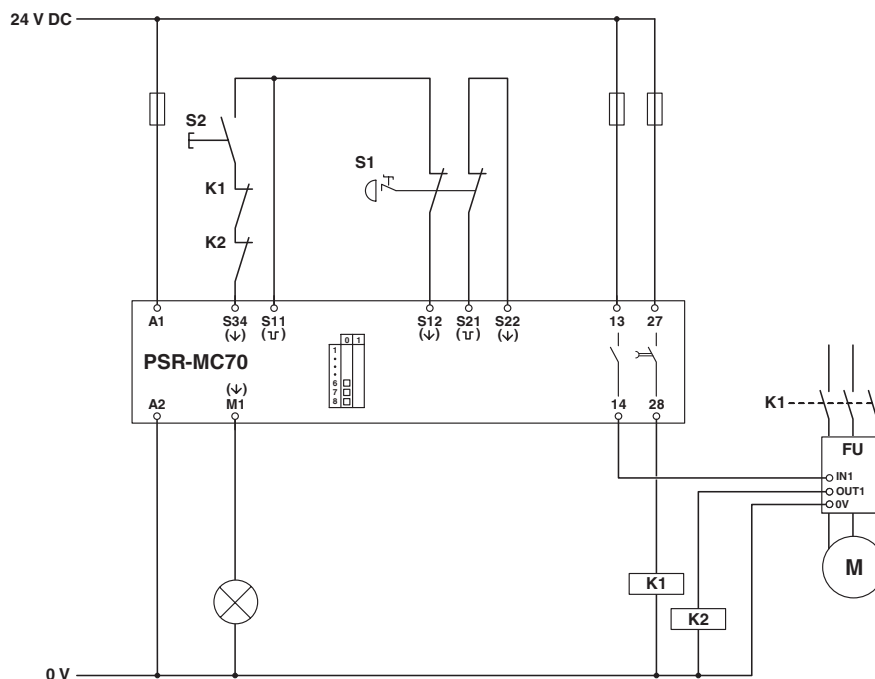

Block diagram

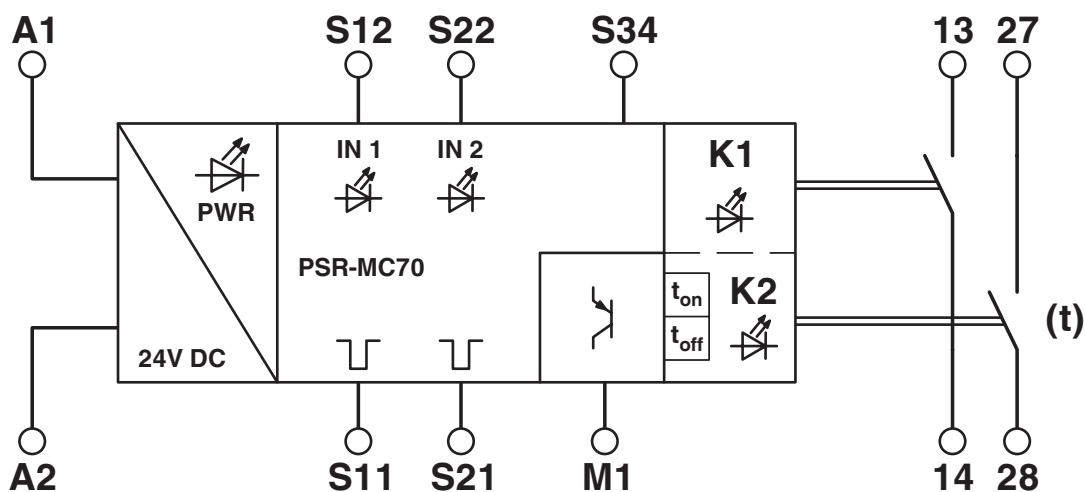

Block diagram

# PSR-MC70-2NO-1DO-24DC-SC - Safety relays



2702094

<https://www.phoenixcontact.com/us/products/2702094>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2702094>



### UL Listed

Approval ID: FILE E 140324



### cUL Listed

Approval ID: FILE E 140324



### Functional Safety

Approval ID: 01/205/5485.01/22

### cULus Listed

# PSR-MC70-2NO-1DO-24DC-SC - Safety relays



2702094

<https://www.phoenixcontact.com/us/products/2702094>

## Classifications

### ECLASS

ECLASS-11.0	27371819
ECLASS-13.0	27371819
ECLASS-12.0	27371819

### ETIM

ETIM 8.0	EC001449
----------	----------

### UNSPSC

UNSPSC 21.0	39122200
-------------	----------



# PSR-MC70-2NO-1DO-24DC-SC - Safety relays



2702094

<https://www.phoenixcontact.com/us/products/2702094>

## Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)