

CN-LAMBDA/4-2.2-BB - Surge protection device



2800024

<https://www.phoenixcontact.com/us/products/2800024>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Attachment plug with Lambda/4 technology as surge protection for coaxial signal interfaces.
Connection: N connectors socket-socket

Commercial data

Item number	2800024
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	NULL
Product key	CL3312
Catalog page	Page 518 (C-8-2015)
GTIN	4046356367967
Weight per piece (including packing)	191 g
Weight per piece (excluding packing)	191 g
Customs tariff number	85363010
Country of origin	US

CN-LAMBDA/4-2.2-BB - Surge protection device



2800024

<https://www.phoenixcontact.com/us/products/2800024>

Technical data

Product properties

IEC test classification	C2
	C3
	D1
VDE requirement class	C2
	C3
	D1
Type	Attachment plug
Product type	Surge protection for transceiver systems
Surge protection fault message	none

Connection data

Connection method	N connector 50 Ω
-------------------	------------------

Dimensions

Width	26.1 mm
Height	66 mm
Depth	83 mm

Material specifications

Seal material	Silicon
Housing surface material	Nickel
Housing material	Brass (CuZn)
Inner conductor material	BeCu
Inner conductor surface material	Gold
Insulation body material	PTFE

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Direction of action	Line-Shield/Earth Ground
Nominal discharge current I_n (8/20) μs (line-ground)	50 kA
Nominal discharge current I_n (8/20) μs (line-shield)	50 kA
Pulse discharge current I_{imp} (10/350) μs	20 kA
Pulse discharge current I_{imp} (10/350) μs (line-earth)	20 kA
Total surge current (8/20) μs	60 kA
Total surge current (10/350) μs	20 kA
Max. discharge current I_{max} (8/20) μs maximum (line-earth)	60 kA
Max. discharge current I_{max} (8/20) μs maximum (line-shield)	60 kA

CN-LAMBDA/4-2.2-BB - Surge protection device



2800024

<https://www.phoenixcontact.com/us/products/2800024>

Impulse discharge current (10/350) μ s, peak value I_{imp}	20 kA
Output voltage limitation at 1 kV/ μ s (line-earth) spike	≤ 12 V (6 kV / 3 kA)
Output voltage limitation at 1 kV/ μ s (line-shield) spike	≤ 12 V (6 kV / 3 kA)
Output voltage limitation at 1 kV/ μ s (line-earth) static	≤ 12 V (6 kV / 3 kA)
Output voltage limitation at 1 kV/ μ s (line-shield) static	≤ 12 V (6 kV / 3 kA)
Voltage protection level U_p (line-earth)	≤ 12 V (6 kV / 3 kA)
Voltage protection level U_p (line-shield)	≤ 12 V (6 kV / 3 kA)
Input attenuation aE, asym.	typ. 0.05 dB (≤ 0.15 dB)
Frequency range	0.82 GHz ... 2.2 GHz
Voltage standing wave ratio VSWR in a 50 Ω system	typ. 1.1 (≤ 1.20 (0.82 GHz...2.2 GHz))
Permissible HF power P_{max} at VSWR = xx (50 ohm system)	≤ 500 W ≤ 4 kW (peak)
Surge protection fault message	none
Impulse durability (line-earth)	C2 - 10 kV / 5 kA D1 - 2.5 kA
Impulse durability (line-shield)	C2 - 10 kV/5 kA D1 - 2.5 kA

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP68
Ambient temperature (operation)	-40 °C ... 90 °C

Standards and regulations

VDE requirement class	C2
	C3
	D1

Standards Information technology specification


Standards/regulations	IEC 61643-21
	IEC 61643-21
Standards/specifications	IEC 61643-21
Note	2005

Mounting

Mounting type	Connection-specific intermediate plugging
---------------	---

Drawings

Circuit diagram

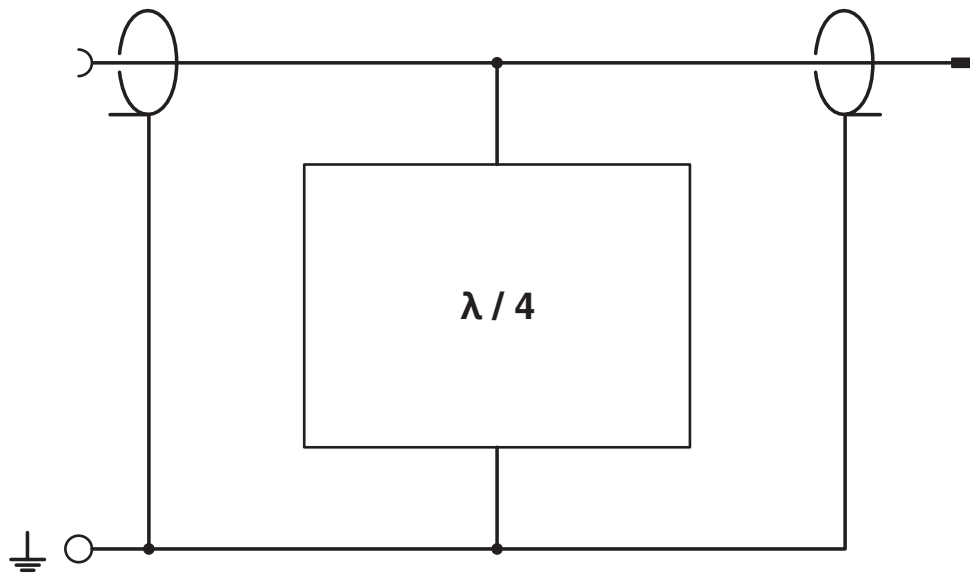

CN-LAMBDA/4-2.2-BB - Surge protection device



2800024

<https://www.phoenixcontact.com/us/products/2800024>

Accessories

CN-UB/MP - Mounting panel

2818135

<https://www.phoenixcontact.com/us/products/2818135>

Tongue for attaching the CN-UB..., to housing panels, for example.



CN-UB/MP-90DEG-50 - Mounting panel

2803137

<https://www.phoenixcontact.com/us/products/2803137>

Angled bracket for individually fixing CN-UB... to housing panels, for example.



CN-LAMBDA/4-2.2-BB - Surge protection device

2800024

<https://www.phoenixcontact.com/us/products/2800024>



CN-UB/MP - Mounting panel

2818135

<https://www.phoenixcontact.com/us/products/2818135>

Tongue for attaching the CN-UB..., to housing panels, for example.



Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com