

# EEM-EM375 - Measuring instrument

2908581

<https://www.phoenixcontact.com/us/products/2908581>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Three-phase power meter for active power measurement with current transformer measurement 1 A / 5 A in networks of up to 500 V, with S0 output, Ethernet interface, certified in accordance with the MID directive



## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2908581             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | C446                |
| Product key                          | CK4C11              |
| Catalog page                         | Page 205 (C-5-2019) |
| GTIN                                 | 4055626338248       |
| Weight per piece (including packing) | 459.7 g             |
| Weight per piece (excluding packing) | 459.7 g             |
| Customs tariff number                | 90283019            |
| Country of origin                    | IT                  |

## Technical data

### Product properties

|                            |                 |
|----------------------------|-----------------|
| Product type               | Energy meter    |
| Insulation characteristics |                 |
| Protection class           | II (EN 50470-1) |
| Insulation characteristics |                 |
| Pollution degree           | 2               |

### Electrical properties

|                      |                                   |
|----------------------|-----------------------------------|
| Electric strength    | 6 kV                              |
|                      | 4 kV (EN 50470-3, 7.2)            |
| Supply               |                                   |
| Supply voltage range | Supply from the measuring circuit |

### Input data

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Measurement                      |                                       |
| Input voltage range              | 3x 184 V ... 288 V (320 V ... 500 V)  |
| Input current range              | up to transformer ratio 10000         |
| Power consumption                | 3.5 VA (1 W)                          |
| Frequency range                  | 45 Hz ... 65 Hz                       |
| Start current $I_{st}$           | 0.002 A                               |
| Minimal current $I_{min}$        | 0.01 A                                |
| Maximum current $I_{max}$        | 6 A                                   |
| Transient current $I_{tr}$       | 0.05 A                                |
| Nominal current $I_{ref}$        | 1 A                                   |
| Secondary rated current $I_{sn}$ | 1 A                                   |
|                                  | 5 A                                   |
| Current transformer ratio        | 1 ... 10000 (max. 10000/1 or 50000/5) |
| Current transformer load         | 1.5 mΩ                                |
| Energy (EN 50470-3)              | Class B                               |
| Real energy (IEC 62053-21)       | Class 1                               |
| Reactive power (IEC 62053-23)    | Class 2                               |

### Output data

|                           |                       |
|---------------------------|-----------------------|
| S0 output                 |                       |
| Output description        | Passive opto-isolated |
| Maximum switching voltage | 27 V DC               |
| Max. switching current    | 27 mA                 |
| Pulse time                | 50 ms ±2 ms           |
| Pause time                | 30 ms ±2 ms           |

# EEM-EM375 - Measuring instrument

2908581

<https://www.phoenixcontact.com/us/products/2908581>



|                |  |
|----------------|--|
| Pulse LED      | 10000 imp/kWh                                |
| Meter constant | 100 imp/kWh, kVAh, kvarh                     |
|                | 1000 imp/kWh, kVAh, kvarh (CT 1 ... 4)       |
|                | 200 imp/kWh, kVAh, kvarh (CT 5 ... 24)       |
|                | 40 imp/kWh, kVAh, kvarh (CT 25 ... 124)      |
|                | 8 imp/kWh, kVAh, kvarh (CT 125 ... 624)      |
|                | 1 imp/kWh, kVAh, kvarh (CT 625 ... 3124)     |
|                | 0.1 imp/kWh, kVAh, kvarh (CT 3125 ... 10000) |

## Connection data

### Measurement connection

|                                  |   |
|----------------------------------|---|
| Connection method                | Screw connection                          |
| Conductor cross section rigid    | 1.5 mm <sup>2</sup> ... 6 mm <sup>2</sup> |
| Conductor cross section flexible | 1.5 mm <sup>2</sup> ... 6 mm <sup>2</sup> |
| Conductor cross section AWG      | 16 ... 10 (rigid/flexible)                |
| Tightening torque                | 1.5 Nm                                    |

### Other connections

|                                  |  |
|----------------------------------|--|
| Connection method                | Screw connection                             |
| Conductor cross section rigid    | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section flexible | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 26 ... 16 (rigid/flexible)                   |
| Tightening torque                | 0.5 Nm                                       |

## Interfaces

### Communication

|                          |                      |
|--------------------------|----------------------|
| Communication protocol   | Modbus/TCP           |
|                          | HTTP                 |
|                          | NTP                  |
|                          | DHCP                 |
|                          | FTP                  |
| Communication standard   | IEEE 802.3           |
| Connection method        | RJ45                 |
| Transmission speed range | 10 Mbps ... 100 Mbps |

## Dimensions

|        |       |
|--------|-------|
| Width  | 72 mm |
| Height | 90 mm |
| Depth  | 67 mm |

## Environmental and real-life conditions

### Ambient conditions

|                              |              |
|------------------------------|--------------|
| Degree of protection (Front) | IP51 (Front) |
|------------------------------|--------------|

# EEM-EM375 - Measuring instrument



2908581

<https://www.phoenixcontact.com/us/products/2908581>

|  |                    |
|--|--------------------|
| Degree of protection (Connections)             | IP20 (Connections) |
| Ambient temperature (operation)                | -25 °C ... 55 °C   |
| Ambient temperature (storage/transport)        | -25 °C ... 75 °C   |
| Max. permissible relative humidity (operation) | 80 %               |

## Approvals

CE

|             |              |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

MID


|                |               |
|----------------|---------------|
| Identification | MID-compliant |
|----------------|---------------|

## Standards and regulations

|                          |            |
|--------------------------|------------|
| Standards/specifications | EN 50470-1 |
|                          | EN 50470-3 |

## Drawings

Connection diagram

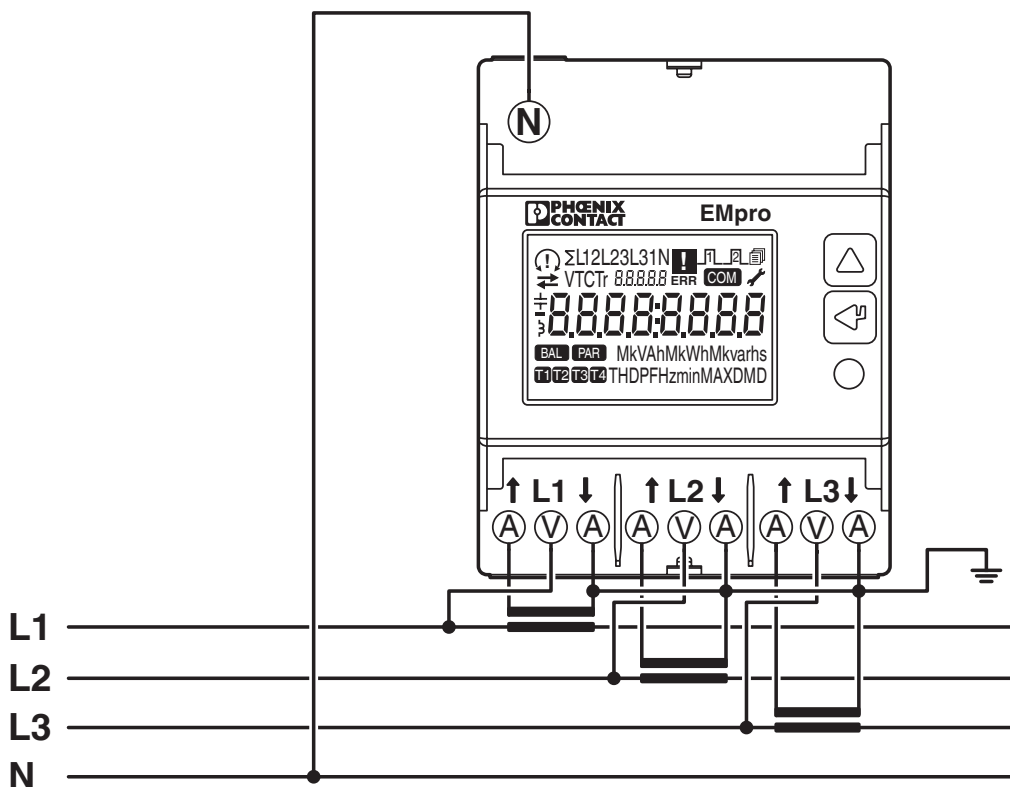

# EEM-EM375 - Measuring instrument

2908581

<https://www.phoenixcontact.com/us/products/2908581>



## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2908581>



**EAC**

Approval ID: RU \*-DE.A\*30.B.01628

**MID**

Approval ID: No. 306/MID

# EEM-EM375 - Measuring instrument

2908581

<https://www.phoenixcontact.com/us/products/2908581>



## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27142330 |
| ECLASS-12.0 | 27142330 |
| ECLASS-13.0 | 27142330 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002301 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 41113600 |
|-------------|----------|

# EEM-EM375 - Measuring instrument



2908581

<https://www.phoenixcontact.com/us/products/2908581>

## Environmental product compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)