



# PIR Occupancy Sensor

NWO-OFX

## Compatible with Power Packs:

- BTX-DUV-CCTFX
- BTX-DUV-10VFX


## Dimensions in Inches

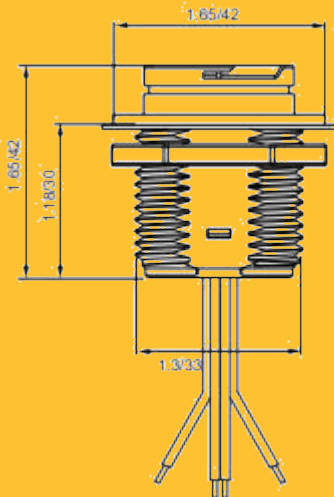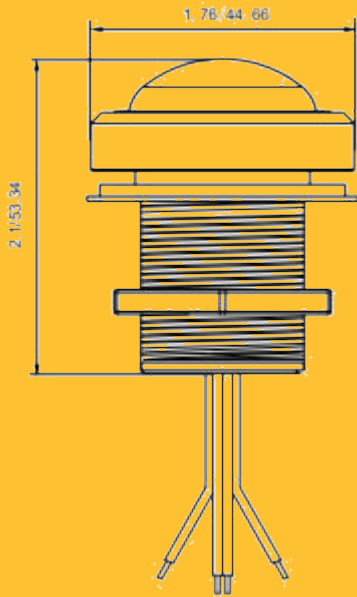

- PIR 12-32V 10mA input
- Compact size fits into most applications
- Programmable group logic



## WIRING DIAGRAM

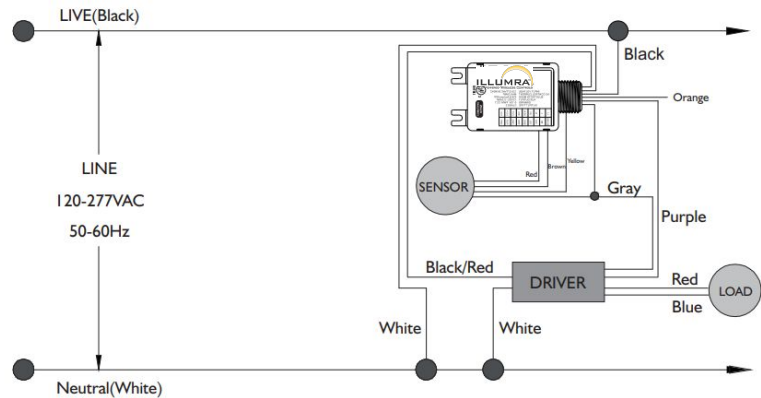

SPECIFICATIONS	NWO-OFX
<b>Infrared Sensor</b>	Omni-directional quad element pyroelectric
<b>Detectable Speed</b>	1~10 Ft/Sec (0.3~3m/sec)
<b>Detection Range</b>	40 Ft
<b>Delay Time Settings</b>	First delay time setting 1-59 minutes Second delay time setting 0-59 minutes First delay dimming level 0-100%
<b>Optimal Temperature</b>	-40°F~158°F (-40°C~70°C)
<b>Dimensions</b>	Diameter 1.76" x 2.1" length