


## High sensitivity thermistor

# ET Thermistor

The ET thermistor series features small size and high sensitivity.

- Features:
- Tight resistance and B-value tolerances; high accuracy
  - Uniform shape facilitates automated assembly
  - Long term reliability

### Product number explanation

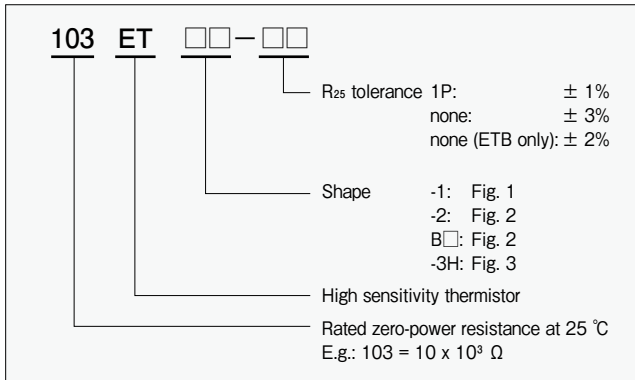

### Applications

Body thermometers, thermometers, medical devices, controllers, mobile devices, battery chargers, battery packs, home electronics, toilet heaters, security, LCDs, electric vehicles

### Specifications

Product number	R <sub>25</sub> <sup>1</sup>	R <sub>25</sub> tolerance	B value <sup>2</sup>	Operating temperature range (°C)		
212ET	2.10 kΩ	± 3%	3850 K ± 1%	- 40 to 90		
402ET	4.00 kΩ		3100 K ± 1%			
582ET	5.80 kΩ		3614 K ± 1%			
103ET	10.0 kΩ		3250 K ± 1%			
203ET	20.0 kΩ		3450 K ± 1%	- 40 to 100		
303ET	30.0 kΩ		3760 K ± 1%			
403ET	40.0 kΩ		3525 K ± 1%			
503ET	50.0 kΩ		4055 K ± 1%			
833ET	83.0 kΩ		4013 K ± 1%			
104ET	100 kΩ		4132 K ± 1%		- 40 to 90	
224ET	226 kΩ		4021 K ± 1%		- 40 to 100	
234ET	232 kΩ		4274 K ± 1%		- 40 to 100	
103ETB	10.0 kΩ		± 1%, ± 2%		3435 K ± 1%	- 40 to 90

- Dissipation factor: 0.7 mW / °C
- Thermal time constant<sup>3</sup>: approx. 3.4 s (ET-1: approx. 3.2 s)
- Rated power at 25 °C: 3.5 mW
- <sup>1</sup>: Rated zero-power resistance at 25 °C
- <sup>2</sup>: B value calculated from rated zero-power resistance at 25 °C and 85 °C
- <sup>3</sup>: Time required to reach 63.2% of temperature difference. Measured with sensor suspended in mid-air.

Product number	R <sub>37</sub> <sup>4</sup>	R <sub>37</sub> tolerance	B value <sup>5</sup>	Operating temperature range (°C)
503ET-3H	29.937 kΩ	± 1.08%	3944 K ± 0.5%	- 40 to 100

- Dissipation factor: 0.7 mW / °C
- Thermal time constant<sup>6</sup>: approx. 0.8 s
- Rated power at 25 °C: 3.5 mW
- <sup>4</sup>: Rated zero-power resistance at 37 °C
- <sup>5</sup>: B value calculated from rated zero-power resistance at 30 °C and 45 °C
- <sup>6</sup>: Time required to reach 63.2% of temperature difference. Measured with sensor immersed in oil.


### Resistance / temperature characteristics

Temperature (°C)	Product number													
	212ET	402ET	582ET	103ET	203ET	303ET	403ET	503ET	833ET	104ET	224ET	234ET	103ETB	503ET-3H
- 40	64.02	57.71	127.7	170.9	402.2	810.7	833.3	1602	2664	3325	7005	9046	204.7	1588
- 30	35.13	35.34	72.10	102.2	233.6	445.1	481.1	855.0	1421	1769	3784	4680	118.5	848.1
- 20	19.65	22.38	42.37	63.07	140.2	253.7	287.5	474.4	788.5	977.5	2116	2515	71.02	470.9
- 10	11.31	14.60	25.84	40.08	86.82	149.8	177.2	272.7	453.0	559.0	1225	1401	43.67	270.4
0	6.724	9.797	16.29	26.16	55.31	91.30	112.4	161.9	269.3	329.8	730.1	808.2	27.70	160.9
10	4.130	6.737	10.57	17.51	36.16	57.31	73.00	99.13	164.8	200.5	447.8	480.2	18.07	98.63
20	2.612	4.736	7.039	11.99	24.23	37.00	48.61	62.38	103.6	125.3	282.1	293.7	12.11	62.12
25	2.100	4.000	5.800	10.00	20.00	30.00	40.00	50.00	83.00	100.0	226.0	232.0	10.00	49.77
30	1.699	3.394	4.806	8.387	16.60	24.47	33.08	40.24	66.91	80.27	182.1	184.4	8.301	40.10
40	1.134	2.476	3.353	5.988	11.61	16.56	22.96	26.58	44.18	52.62	120.3	118.6	5.811	29.937 <sup>4</sup>
50	0.7753	1.835	2.369	4.353	8.279	11.45	16.26	17.93	29.80	35.23	81.07	78.00	4.147	21.72 <sup>5</sup>
60	0.5420	1.378	1.685	3.217	6.005	8.070	11.70	12.33	20.51	24.00	55.75	52.39	3.011	12.20
70	0.3867	1.049	1.214	2.414	4.425	5.791	8.569	8.588	14.37	16.59	39.01	35.87	2.224	8.449
80	0.2811	0.7997	0.8863	1.836	3.310	4.222	6.367	6.064	10.24	11.64	27.78	24.99	1.668	5.940
85	0.2413	0.7005	0.7610	1.610	2.877	3.626	5.517	5.120	8.700	9.807	23.58	21.00	1.451	5.009
90	0.2079	0.6145	0.6557	1.416	2.509	3.125	4.797	4.338	7.419	8.287	20.10	17.72	1.267	4.240
100					1.926	2.346	3.662	3.142	5.459		14.75	12.75		3.070
B <sub>25/85</sub>	3850 K	3100 K	3614 K	3250 K	3450 K	3760 K	3525 K	4055 K	4013 K	4132 K	4021 K	4274 K	3435 K	3944 K <sup>5</sup>

<sup>6</sup>: Rated zero-power resistance at 45 °C

Unit: kΩ

### Dimensions

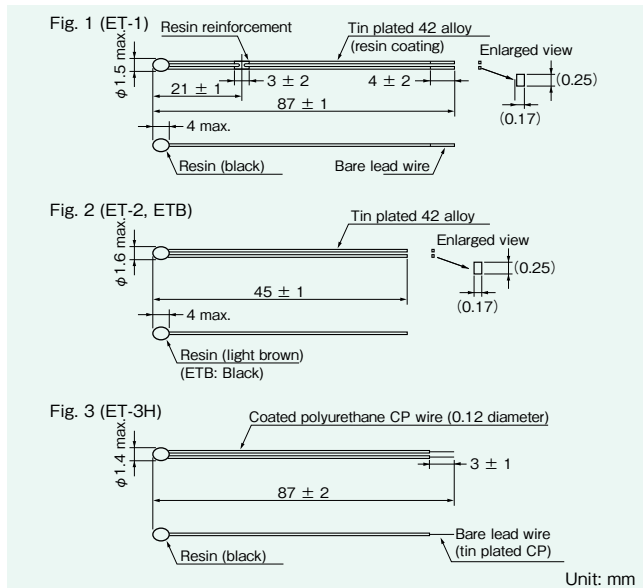

### Reliability data

Item	Test conditions	Criteria
Resistance to soldering heat	10 s at 260 °C	ΔR, ΔB ± 1%
Solderability	2 s at 245 °C Flux material: Rosin 25%, ethyl alcohol	More than 90% soldered
Tensile strength (lead wire)	10 s at 1 N (horizontal pull)	ΔR, ΔB ± 1% and visual inspection
Free fall	Three times natural fall to a maple board from 1 m height.	Over 100 MΩ
Insulation resistance	100 V DC	Over 100 MΩ
Dry heat	1000 hours at 100 °C (90 °C <sup>2</sup> )	ΔR, ΔB ± 1% (± 2%)
Damp heat (under electrical load)	1000 hours at 40 °C and 90% humidity Electrical load: 0.1 mA DC	
Temperature cycle (thermal shock)	100 cycles as below: 1. - 20 °C for 5 minutes 2. Room temperature for 3 minutes 3. 100 °C (80 °C <sup>7</sup> ) for 5 minutes 4. Room temperature for 3 minutes	

<sup>7</sup>: The value in brackets is for 212ET to 103ET, 104ET and 103ETB

### Caution

- Do not apply vertical force to the lead wires exceeding 0.3 N.
- Do not apply horizontal force to the lead wires exceeding 1 N (see drawing below).
- When soldering make sure to have a minimum distance of 5 mm from the sensor head, use a soldering iron with 50 W and solder for maximum seven seconds at 340 °C.