


## PME264NE6100MR30

Aliases (P264EL104M660A)

PME264/P264, Film, Metallized Paper, Safety, 0.1 uF, 20%, 660 VAC (X2), 1500 VDC, 85°C, Lead Spacing = 25.4mm

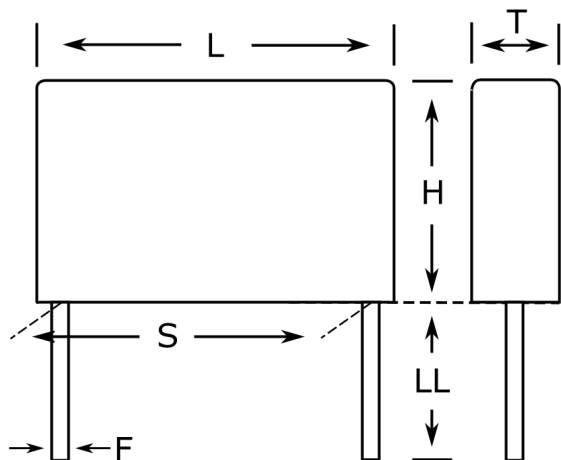

Click [here](#) for the 3D model.

| Dimensions |                 |
|------------|-----------------|
| L          | 30.5mm MAX      |
| H          | 22mm MAX        |
| T          | 15.3mm MAX      |
| S          | 25.4mm +/-0.4mm |
| LL         | 30mm +5mm       |
| F          | 1mm NOM         |

| Packaging Specifications |           |
|--------------------------|-----------|
| Packaging                | Bulk, Bag |
| Packaging Quantity       | 75        |

| General Information |                  |
|---------------------|------------------|
| Series              | PME264/P264      |
| Dielectric          | Metallized Paper |
| Style               | Radial           |
| Features            | EMI Safety       |
| RoHS                | Yes              |
| Lead                | Wire Leads       |
| Safety Class        | X2               |
| Qualifications      | ENEC, UL, cUL    |
| AEC-Q200            | No               |
| THB Performance     | No               |
| Construction        | Molded           |
| Component Weight    | 13.5 g           |

| Specifications        |              |
|-----------------------|--------------|
| Capacitance           | 0.1 uF       |
| Capacitance Tolerance | 20%          |
| Voltage AC            | 660 VAC (X2) |
| Voltage DC            | 1500 VDC     |
| Temperature Range     | -40/+85°C    |
| Rated Temperature     | 85°C         |
| Dissipation Factor    | 1.3% 1kHz    |
| Insulation Resistance | 12 GOhms     |
| Max dV/dt             | 600 V/us     |