


## PMR209MC6220M100R30

Aliases (P409CP224M250AH101)

Not for New Design

PMR209, Film, Metallized Paper, Resistor/Capacitor, 0.22 uF, 20%, 630 VDC, 85°C, Lead Spacing = 20.3mm

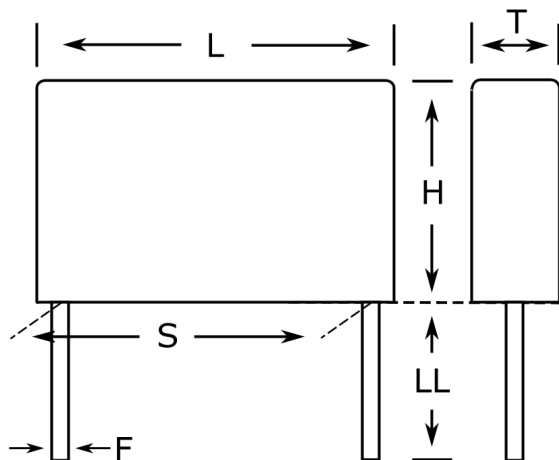

Click [here](#) for the 3D model.

### General Information

Series	PMR209
Dielectric	Metallized Paper
Style	Radial
Features	RC Unit approved
RoHS	Yes
Lead	Wire Leads
Qualifications	ENEC, UL, cUL
AEC-Q200	No
Construction	Molded
Component Weight	6.3 g
Miscellaneous	Resistor= 100 Ohms.
Notes	Not For New Design, Please Use The New P409 Series @ 275 VAC.

### Specifications

Capacitance	0.22 uF
Capacitance Tolerance	20%
Voltage AC	250 VAC
Voltage DC	630 VDC
Temperature Range	-40/+85°C
Rated Temperature	85°C
Insulation Resistance	3 GOhms
Safety Class	X2

### Dimensions

L	24mm MAX
H	16.5mm MAX
T	11.3mm MAX
S	20.3mm +/-0.4mm
LL	30mm +5mm
F	0.8mm +/-0.05mm

### Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	150