


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: PICOCOLOR  
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
CONTACT BLADE: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.
2. P/N: 9205-HS  
INSULATOR: HEAT SHRINK TUBING. BLACK.  
BODY: NICKEL UNDERPLATED BRASS.  
CONTACT: GOLD FLASH OVER NICKEL UNDERPLATED BRASS.  
GOLD FLASH BeCu SPRING.
3. P/N: W-701/COLOR  
28AWG TINNED COPPER  
0.047 [1.19] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
MAXIMUM CURRENT: 1.0 AMPS  
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
HANDS FREE: 600 W.V.D.C.  
MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

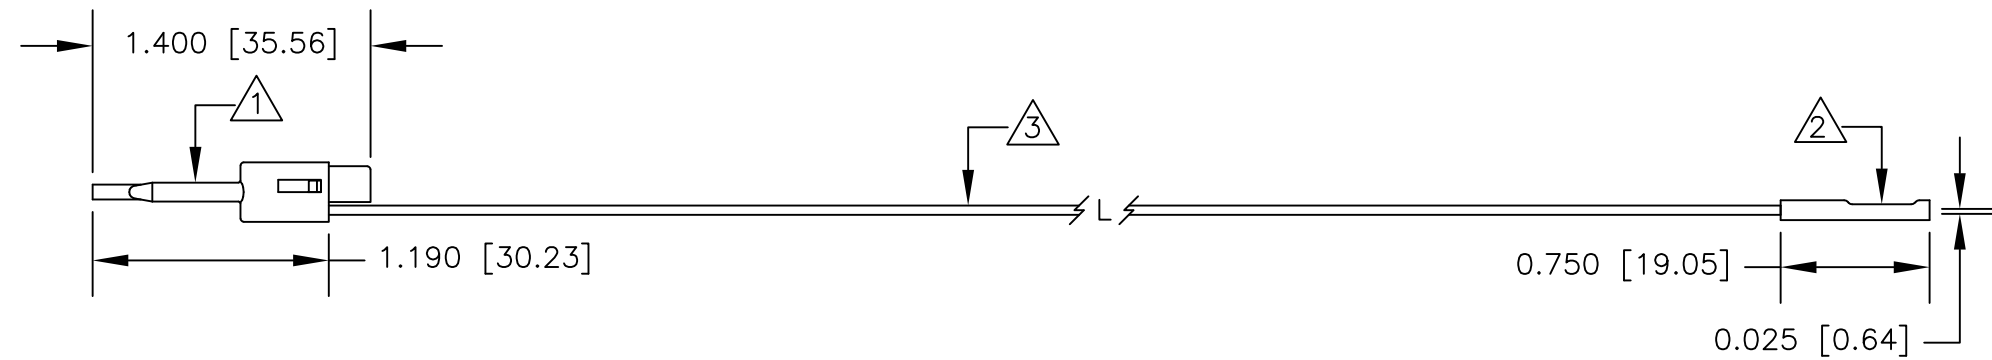

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L.	5/13	DESCRIPTION PICO HOOK TO 0.025 [0.64] SQ. SOCKET (28AWG)
		FINISH SEE NOTE.	APPROVED BY		
NEXT ASSY	USED ON				SIZE <b>B</b>
APPLICATION		DO NOT SCALE DRAWING			CODE IDENT NO. <b>08505</b>
					DRAWING NO. <b>P703</b>
					REV. 
					SCALE 1:1
					SHEET 1 OF 1