


NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
  - (a). 100% OPEN, SHORT & MISWIRE TEST,
  - (b). INSULATOR RESISTANCE: 10 Mohm MIN.  
DC 300V 0.01sec.
  - (c). CONTACT RESISTANCE: 3ohm MAX.

PIN ASSIGNMENT

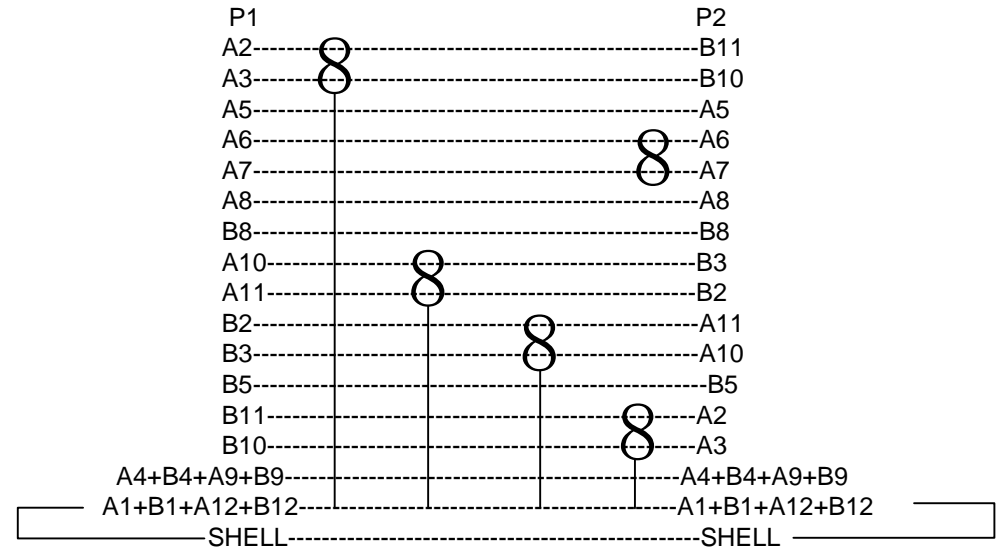

| 4   | OVERMOLD BLACK PVC 45P MA-001.  |     |
|-----|---|-----|
| 3   | USB3.1 C TYPE MALE BLACK INSULATOR SOLDER TYPE.   |     |
| 2   | USB3.1 C TYPE(3.1C-G4-C1) MALE BLACK INSULATOR SOLDER TYPE.                               |     |
| 1   | (32AWG*1C+EAM)*4+32AWG*1P+32AWG*4C+2EAB(85%) OD:4.8MM L:300mm<br>BLACK PVC JACKET UL2725. |     |
| NO. | Description   | P/N |

|              |                |                  |  |          |         |      |           |
|--------------|----------------|------------------|--|----------|---------|------|-----------|
| DWG NO:      | PCM-00130      | GOODS CODE       |  | Draw     |         | Date | 2019/2/22 |
| ITEM NO.     | P4199A         | DRAWING EVIDENCE |  | Check    |         | Date |           |
| Goods NO.    | C13165-002 - A |                  |  | Approval | L.Fried | Date |           |
| Original NO. |                | Unit(mm)         |  |          |         |      |           |

PREMIER CABLE MFG CO LTD

|       |                |           |
|-------|----------------|-----------|
| D     |                |           |
| C     |                |           |
| B     | CHANGE PIN OUT | 2019/7/18 |
| VER.A | REVISE         | Date.     |