

# PCT 121614



Sample image

**Order symbol:** PCT 121614

**Product nbr:** 7022731

**Description:** Enclosure. PC


**Remarks:** Clear transparent cover

**Including:** Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

**EAN:** 6418074058621

**El. number:**

- Finland: 3435404
- Denmark: 8212002830
- Sweden:

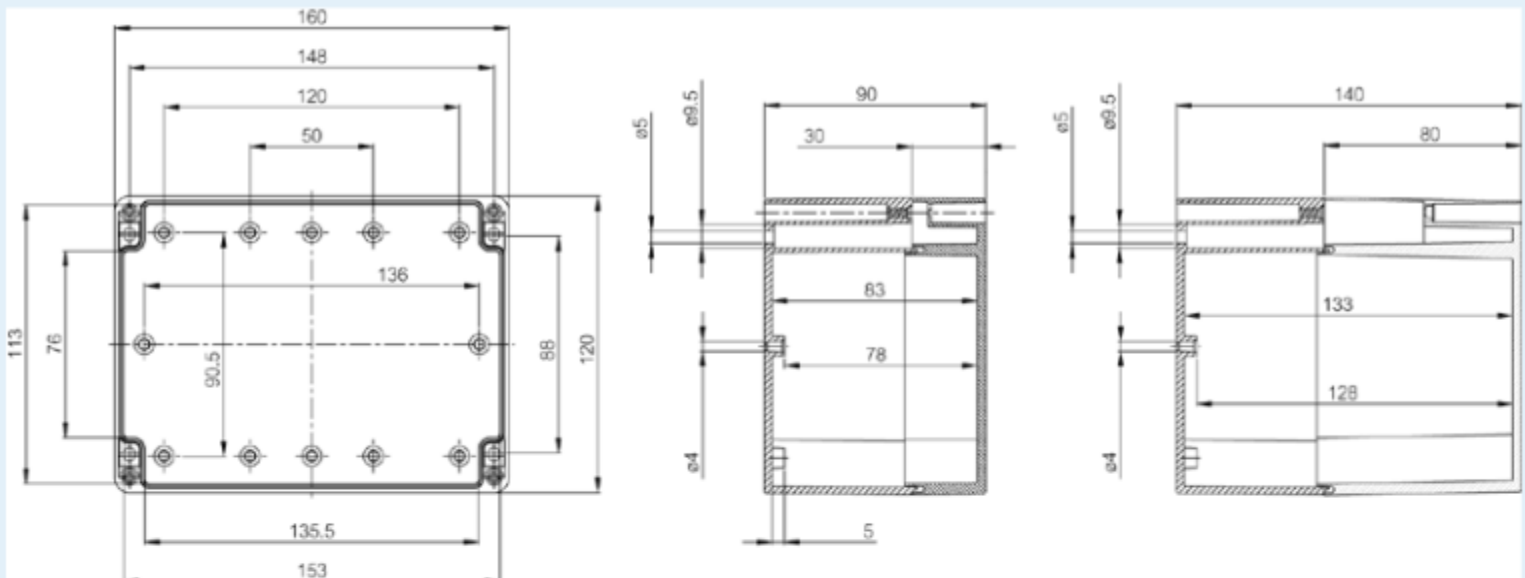

| Dimensions: | Height | Width | Depth |
|-------------|--------|-------|-------|
| mm:         | 120    | 160   | 140   |
| inch:       | 4.72   | 6.3   | 5.51  |

#### Materials:

|                  |                      |
|------------------|----------------------|
| Material:        | Polycarbonate        |
| Base colour:     | RAL 7035 -light grey |
| Cover colour:    | Clear transparent    |
| Gasket material: | Polyurethane         |

#### Temperatures:

|                              |             |
|------------------------------|-------------|
| Temperature °C (short term): | -40 ... 120 |
| Temperature °C (continuous): | -40 ... 80  |
| Temperature °F (short term): | -40 ... 250 |
| Temperature °F (continuous): | -40 ... 175 |

#### Accessories:

|          |                                                         |
|----------|---------------------------------------------------------|
| MIV 10   | DIN-35 Mounting rail. for enclosures:<br>(100 x 35 x 1) |
| TF 28037 | Mounting foot kit (4 pcs). for enclosures:              |
| TRH 1216 | DIN-15 Mounting rail. for enclosures:<br>(146 x 35 x 1) |
| TRM 0816 | DIN-15 Mounting rail. for enclosures:<br>(146 x 15 x 1) |
| TM 1216  | Back Panel. for enclosures:<br>(111 x 134 x 1)          |
| TH A     | Gray plastic hinges (2 pcs)                             |

#### Rating:

|                                        |                   |
|----------------------------------------|-------------------|
| Ingress protection (EN 60529):         | IP66; IP67;       |
| Impact Resistance (EN 62262):          | IK07; IK08;       |
| Electrical insulation:                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815): | 1                 |
| UV resistance:                         | UL 508            |
| Flammability Rating:                   | UL 746C 5"        |
| Glow Wire Test (IEC 695-2-1) °C:       | 960 °C            |
| NEMA Class                             |                   |

#### Certificates:

SGSFimko\_EURONORD