

Han-Power S with PSU 24 VDC/2A

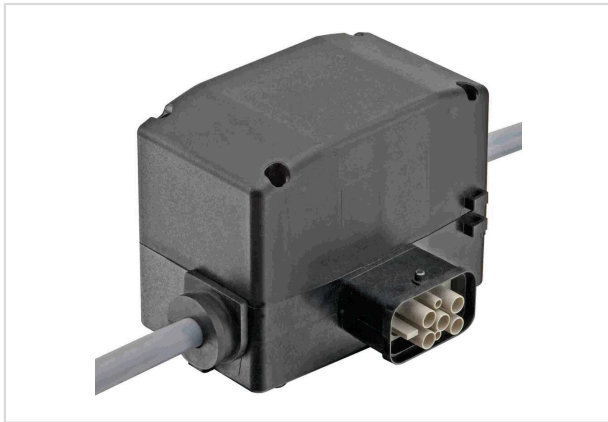


Image is for illustration purposes only. Please refer to product description.

Part number	09 12 008 4610
Specification	Han-Power S with PSU 24 VDC/2A

Identification

Category	Energy distributors
Series of hoods/housings	Han-Power® S
Element	Energy distributor
Specification	With 1x Han® Q 4/2 With power supply 24 V

Version

Termination method	IDC insulation displacement termination for stranded wires according to IEC 60228 Class 5
Number of contacts	6
Number of signal contacts	2
Number of power contacts	4
PE contact	Yes

Technical characteristics

Conductor cross-section	4 ... 6 mm ²
Rated current	40 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	-25 ... +85 °C



Pushing Performance
Since 1945

Technical characteristics

Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65

Material properties

Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material flammability class acc. to UL 94	V-0

Specifications and approvals

Specifications	IEC 60664-1
	IEC 61984

Commercial data

Packaging size	1
Country of origin	Germany
European customs tariff number	85366990
ETIM	EC000214
eCl@ss	27142409 Small distribution board