

SEK-18 SV MA STD ANG29 RLG 06PPLS4CLIP

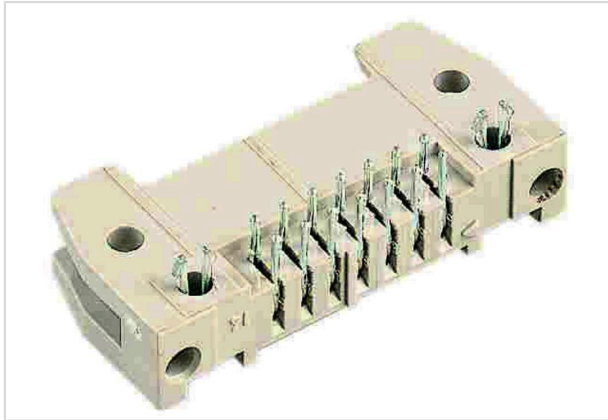


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 18 506 5953 |
| Specification | SEK-18 SV MA STD ANG29 RLG 06PPLS4CLIP |
| HARTING eCatalogue | https://b2b.harting.com/09185065953 |

Identification

| | |
|----------------------------|----------------|
| Category | Connectors |
| Series | SEK Standard |
| Element | Male connector |
| Description of the contact | Angled |

Version

| | |
|--------------------|----------------------------|
| Termination method | Wave soldering termination |
| Connection type | PCB to cable |
| Number of contacts | 6 |
| Termination length | 2.9 mm |
| PCB fixing | With board locks |
| Locking type | With long levers |

Technical characteristics

| | |
|------------------------------------|---------------------------|
| Contact rows | 2 |
| Contact spacing (termination side) | 2.54 mm |
| Rated current | 1 A |
| Insulation resistance | $>10^9 \Omega$ |
| Contact resistance | $\leq 20 \text{ m}\Omega$ |
| Limiting temperature | -55 ... +125 °C |
| Insertion and withdrawal force | $\leq 12 \text{ N}$ |
| Performance level | NM 30 (S4) |
| Mating cycles | ≥ 250 |



Technical characteristics

| | |
|---------------------------|-------------------------------|
| Test voltage $U_{r,m.s.}$ | 1 kV |
| Isolation group | IIIa ($175 \leq CTI < 400$) |
| PCB thickness | 1.6 mm |

Material properties

| | |
|---|--|
| Material (insert) | Thermoplastic resin (PBT) |
| Colour (insert) | Grey |
| Material (contacts) | Copper alloy |
| Surface (contacts) | Noble metal over Ni Mating side Sn over Ni Termination side |
| Layer thickness | $\geq 0.76 \mu\text{m}$ |
| Layer thickness | $\geq 30 \mu\text{inch}$ |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Not contained |
| California Proposition 65 substances | Yes |
| California Proposition 65 substances | Antimony trioxide Lead Nickel |
| Requirement set with Hazard Levels | R26 |

Specifications and approvals

| | |
|------------------------|--|
| Specifications | IEC 60603-13 |
| UL / CSA | UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079 |
| Railway classification | F3/I3 |

Commercial data

| | |
|-------------------|-------------|
| Packaging size | 100 |
| Net weight | 6.15 g |
| Country of origin | Switzerland |

Commercial data

European customs tariff number 85366990

eCl@ss 27460201 PCB connector (board connector)

Cross section of solder termination

