

SUMMARY

Wires

Fluidic	1
---------	---



Image is for illustrative purpose only

Series	1P
Termination type	Fluidic contact (1)
IP rating	50
AWG wire size	0.00 - 0.00
Cable Ø	0.00 - 0.00 mm
Status	Active
Matching parts	PAG.A0.1GZ.ZC65V

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PK*: Fixed receptacle with two nuts (back panel mounting) fluidic
Keying	1 key (alpha=0; Plug: male contact; Receptacle: female contact)
Housing Material	PSU (Polysulfone), gray
Variant	V : Green front nut
Weight	6.63 g

Performance


Configuration	1P.A01 : 1 Fluidic contact
Insulator	
Rated Current	

Others

Endurance (Shell):	>2000 mating cycles
Temp (min / max):	-50°C / +150°C
Steam sterilization:	> 100 times (with potting on rear connection)
Pressure:	2 bars

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

DRAWINGS

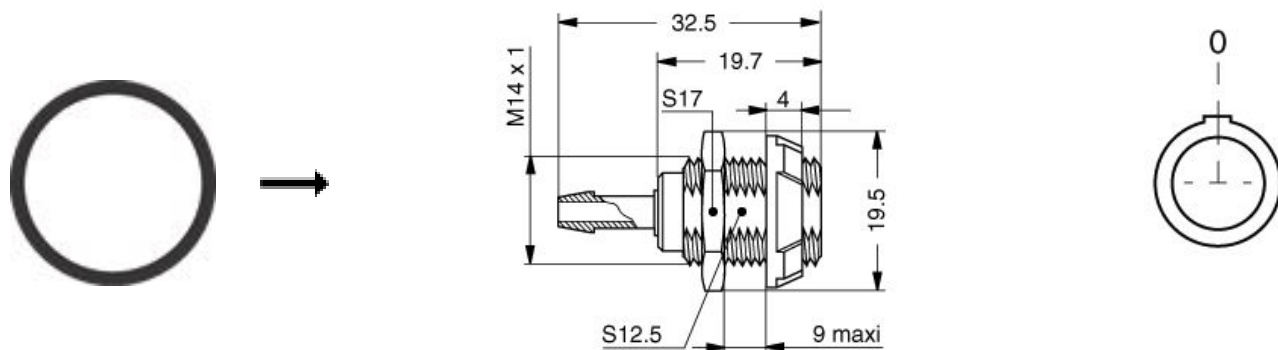

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.