

QT-Brightek High Power Series

0.5W High Power 2835 LED

Part No.: QBHP686-IGN-2913

IG = True Green

N = 100mA

Tablet of Contents:

Introduction	3
Electrical / Optical Characteristic (Ta=25 °C)	4
Absolute Maximum Rating	4
Characteristic Curves.....	5
Solder Profile & Footprint.....	6
Packing	7
Labeling	9
Ordering Information	9
Revision History	10
Disclaimer	10

Introduction

Feature:

- Clear lens
- Package in tape and reel
- 0.5W high power
- Low thermal resistance
- InGaN technology for IG
- 120 degree viewing angle

Description:


The low profile 0.5W high bright LED has height of 0.8mm. It is ideal for indoor lighting and general use.

Application:

- Status indication
- Industrial equipment backlighting
- Architecture lighting

Certification & Compliance:

- TS16949
- ISO9001
- RoHS Compliant

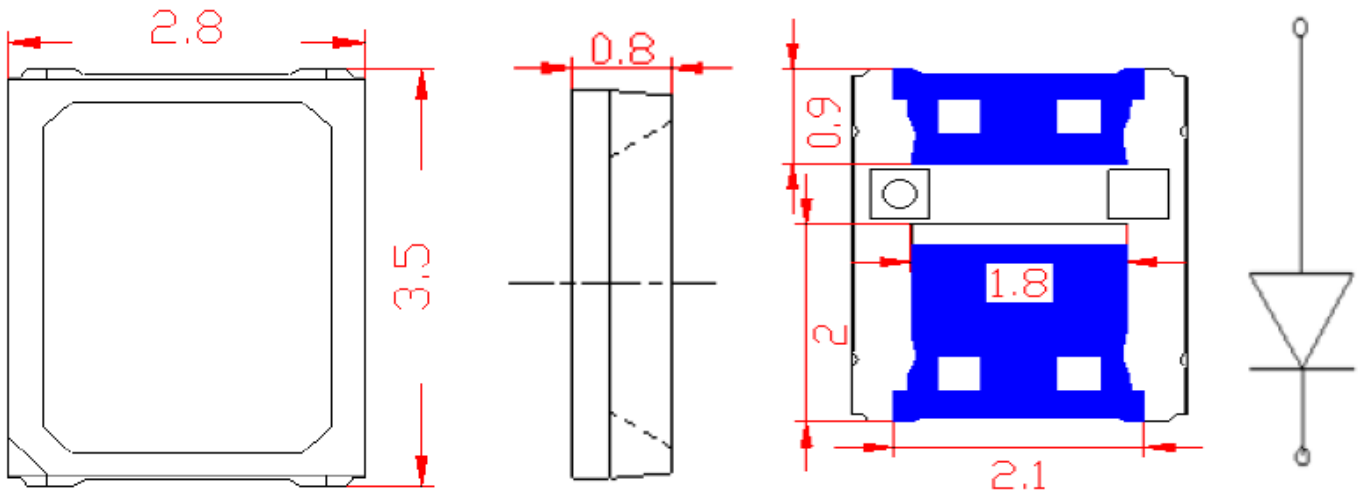**Dimension:**

Units: mm / tolerance = +/-0.2mm

Electrical / Optical Characteristic (Ta=25 °C)

Product	Color	I _F (mA)	V _F (V)		λ _D (nm)			Φ _V (lm)	
			Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.
QBHP686-IGN-2913	True Green	100	3.0	3.4	515	525	530	30	38

Absolute Maximum Rating

Material	P _d (mW)	I _F (mA)	I _{FP} (mA)*	V _R (V)	T _{OP} (°C)	T _{ST} (°C)	T _{SO L} (°C)**
InGaN (IG)	530	160	200	5	-40 ~ +85	-40 ~ +100	260

*Duty 1/10 @ 1KHz

**IR Reflow for no more than 10 sec @ 260 °C

Forward Voltage V_F for InGaN @ I_F=100mA

Bin	Min.	Max.	Unit
f	2.8	3.1	V
g	3.1	3.4	

Luminous Flux Φ_V for True Green (IG) @ I_F=100mA

Bin	Min.	Max.	Unit
P300	30	35	lm
P350	35	40	
P400	40	45	

Dominant Wavelength λ_D for True Green (IG) @ I_F=100mA

Bin	Min.	Max.	Unit
TG1	515	520	nm
TG2	520	525	
TG3	525	530	

Note:


Tolerance of measurement of forward voltage: ±0.1V

Tolerance of measurement of luminous flux: ±15%


Tolerance of measurement of dominant wavelength: ±1nm

Characteristic Curves


InGaN (IB/IG)

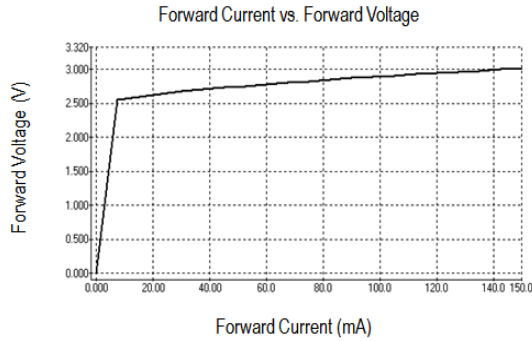


a) FORWARD CURRENT VS. FORWARD VOLTAGE

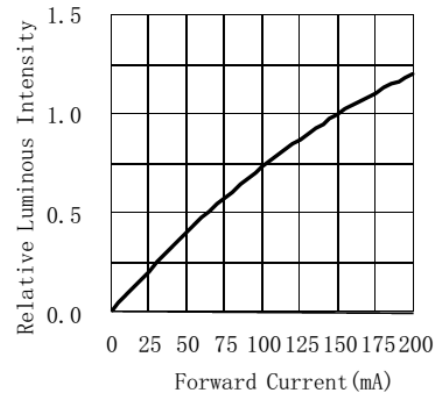


b) RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

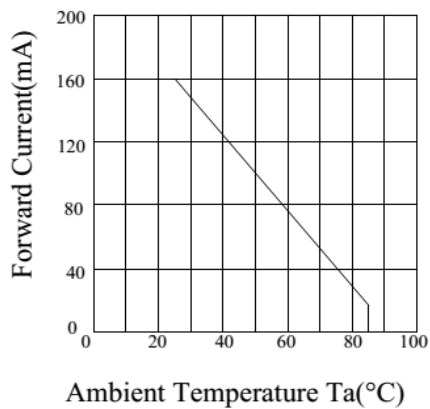


c) FORWARD CURRENT VS. AMBIENT TEMPERATURE

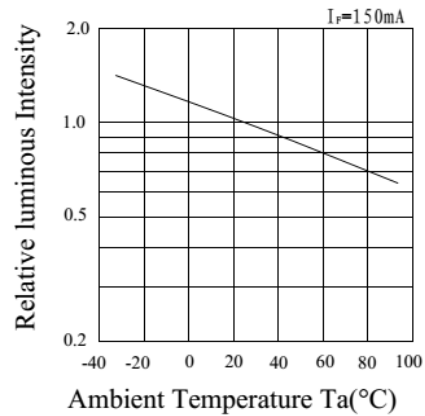

d) RELATIVE INTENSITY VS. AMBIENT TEMPERATURE

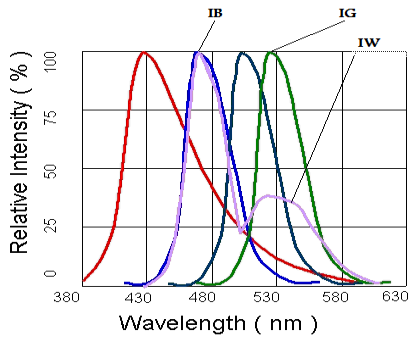

e) RELATIVE INTENSITY VS. WAVELENGTH

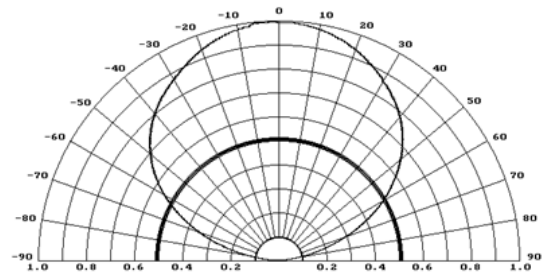



f) RADIATION PATTERN

Solder Profile & Footprint

IR-reflow Condition (Pb free)

Area	Title	Symbol	Min	Max	Unit
(1)Preheat	Ramp-up rate	Vp	1	5	°C/sec
	temperature	Tp	150	-	°C
	time	tp	-	-	sec
(2)Equilibrium	Ramp-up rate	Ve	-	-	°C/sec
	temperature	Te	150	200	°C
	Time	te	60	120	sec
(3)Reflow	Ramp-up rate	Vr	1	5	°C/sec
	temperature	Tr	220	-	°C
	Time	tr	-	60	sec
	Peak temperature	Trp	-	260	°C
	Peak time	trp	-	10	sec
(4)Cooling	Ramp-down rate	Vc	3	6	°C/sec

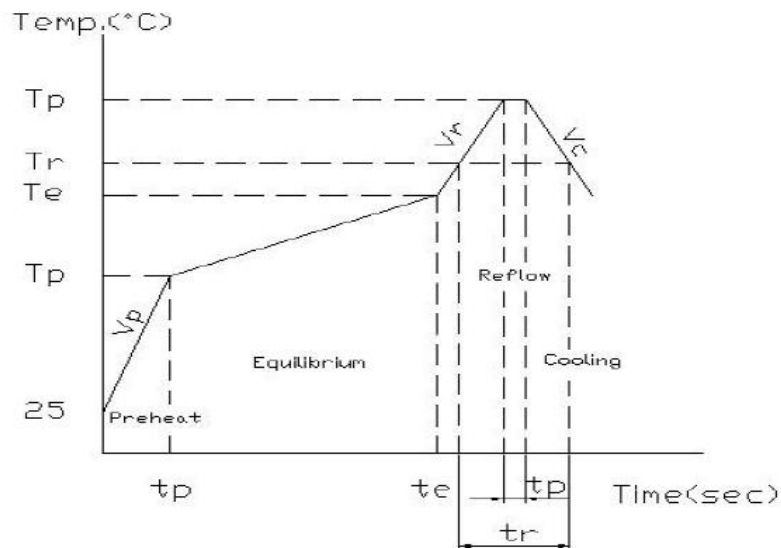


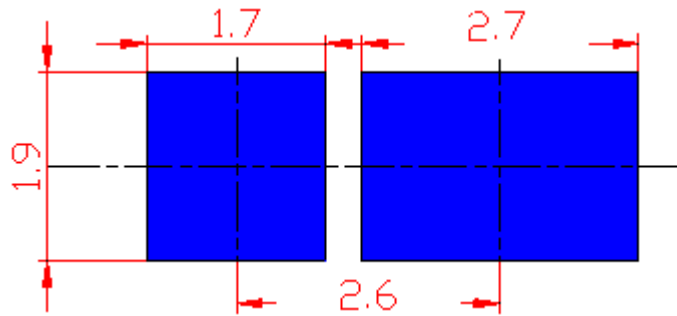Recommended Pad Layout

Units: mm


Tolerance: $\pm 0.2\text{mm}$ **Packing**

Reel Dimension:

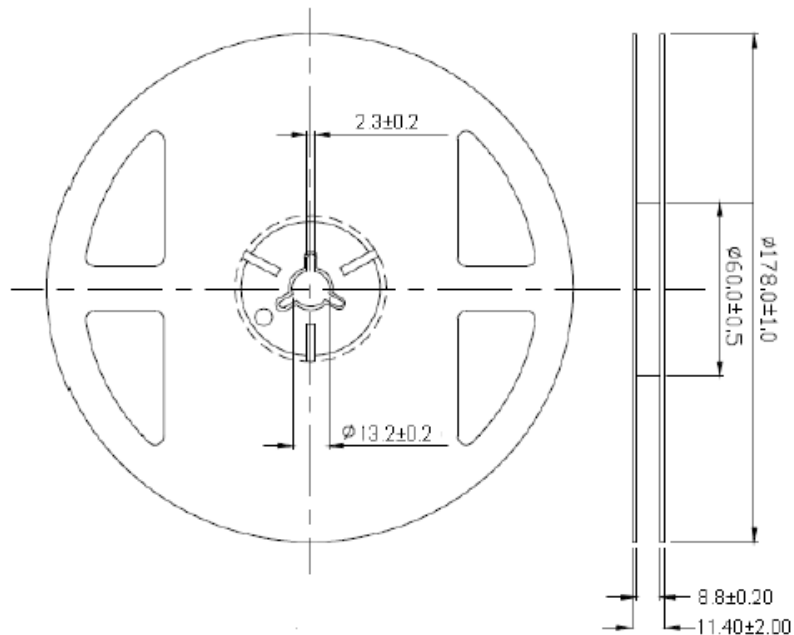

Unit: mm


Tape Dimension:

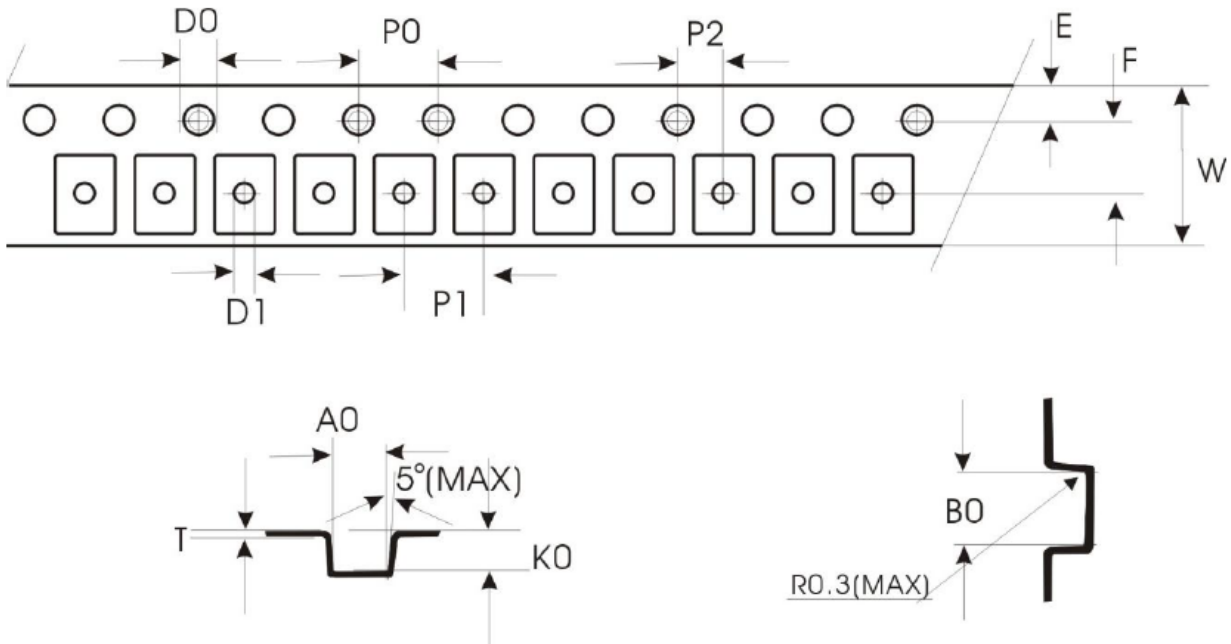

Symbol	A0	B0	K0	P0	P1	P2	T
Spec	3.0±0.1	3.8±0.1	1.0±0.1	4.0±0.1	4.0±0.1	2.00±0.1	0.22±0.05
Symbol	E	F	D0	D1	W	P0	
Spec	1.75±0.10	3.50±0.05	1.5±0.1	1.0±0.1	8.0±0.1	40.0±0.2	

Unit: mm

Packaging Specification:

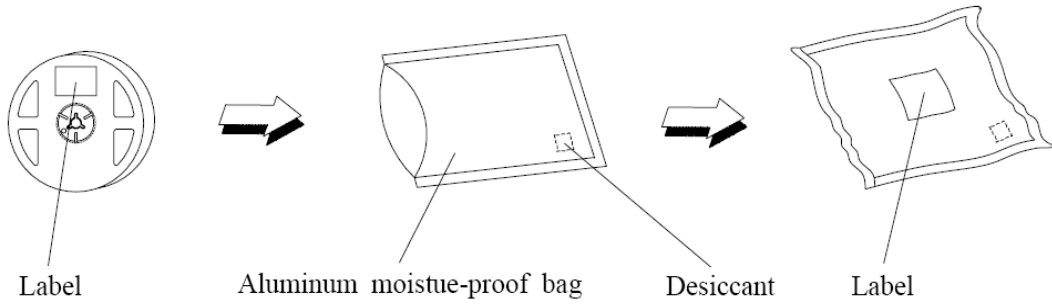

Labeling



Part No: _____

Customer P/N: _____

Item: _____

Q'ty: _____

Vf: _____

Iv: _____

WI: _____

Date: _____

Made in China

Ordering Information

Part #	Orderable Part #	Spec Range	Quantity per reel
QBHP686-IGN-2913	QBHP686-IGN-2913	Φ v=38lm typ. @ 100mA/ Color=525nm	4,000 units

Revision History

Description:	Revision #	Revision Date
New Release of QBHP686-IGN-2913	V1.0	06/18/2018

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.