

CMS03N06T-HF

N-Channel
RoHS Device
Halogen Free





Features

- High power and current handling capability.
- Surface mount package.

Mechanical data

- Case: SOT-23, molded plastic.
- Mounting position: Any.

Circuit Diagram

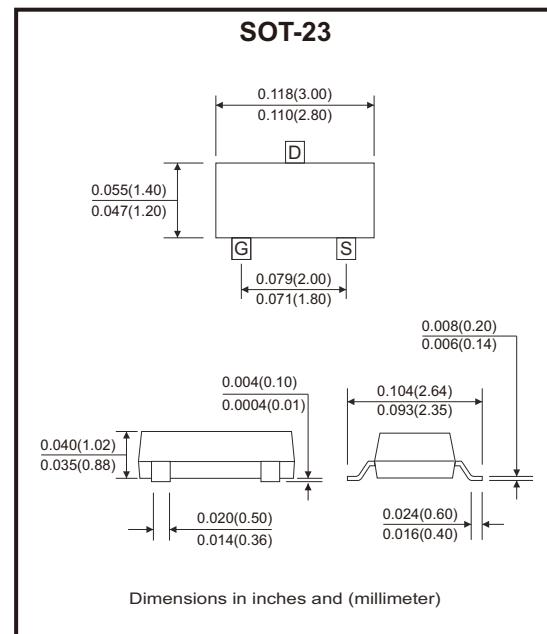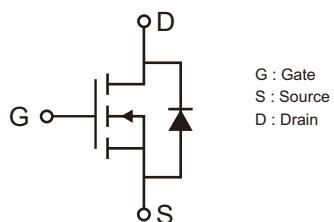

Maximum Ratings (at Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-source voltage	V _{DS}	60	V
Gate-source voltage	V _{GS}	±20	V
Drain current-continuous	I _D	3	A
Drain current-pulsed (Note 1)	I _{DM}	10	A
Maximum power dissipation	P _D	1.7	W
Thermal resistance junction to ambient (Note 2)	R _{θJA}	73.5	°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C

Notes: 1. Pulse width limited by maximum junction temperature.

2. Surface mounted on FR4 board, t ≤ 10 sec.

Electrical Characteristics (at $T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_{\text{D}} = 250\mu\text{A}$	60			V
Zero gate voltage drain current	$I_{\text{DS}}^{\text{SS}}$	$V_{\text{DS}} = 60\text{V}, V_{\text{GS}} = 0\text{V}$		1		μA
Gate-body leakage current	I_{GSS}	$V_{\text{GS}} = \pm 20\text{V}, V_{\text{DS}} = 0\text{V}$			± 100	nA
On characteristics (Note 1)						
Gate threshold voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_{\text{D}} = 250\mu\text{A}$	1.0	1.3	2.0	V
Drain-source on-state resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}} = 10\text{V}, I_{\text{D}} = 3\text{A}$		78	105	$\text{m}\Omega$
		$V_{\text{GS}} = 4.5\text{V}, I_{\text{D}} = 1.5\text{A}$		95	125	
Forward transconductance	g_{FS}	$V_{\text{DS}} = 15\text{V}, I_{\text{D}} = 2\text{A}$		3		S
Dynamic characteristics (Note 2)						
Input capacitance	C_{iss}	$V_{\text{DS}} = 30\text{V}, V_{\text{GS}} = 0\text{V}, f = 1\text{MHz}$		510		pF
Output capacitance	C_{oss}			34		
Reverse transfer capacitance	C_{rss}			26		
Switching characteristics (Note 2)						
Turn-on delay time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = 30\text{V}, I_{\text{D}} = 1.5\text{A}$ $V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 1\Omega$		6		ns
Turn-on rise time	t_r			15		
Turn-off delay time	$t_{\text{d}(\text{off})}$			15		
Turn-off fall time	t_f			10		
Total gate charge	Q_g	$V_{\text{DS}} = 30\text{V}, I_{\text{D}} = 3\text{A}, V_{\text{GS}} = 10\text{V}$		14.6		nC
Gate-source charge	Q_{gs}			1.6		
Gate-drain charge	Q_{gd}			3		
Drain-source diode characteristics						
Diode forward voltage (Note 1)	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_{\text{S}} = 3\text{A}$			1.2	V
Diode forward current (Note 3)	I_{S}				3	A

Notes: 1. Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.

2. Guaranteed by design, not subject to production.

3. Surface mounted on FR4 board, $t \leq 10$ sec.

Rating and Characteristic Curves (CMS03N06T-HF)

Fig.1 - Power Dissipation

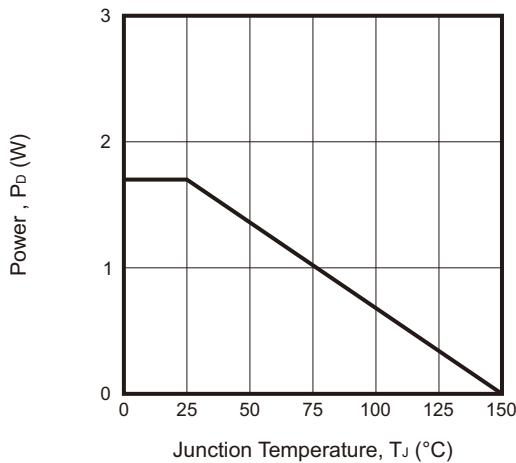


Fig.2 - Drain Current

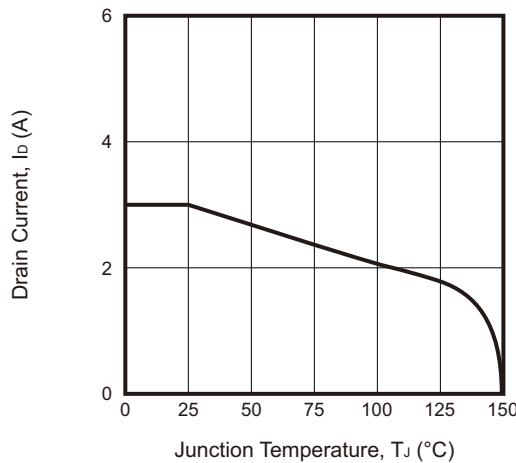


Fig.3 - Output Characteristics

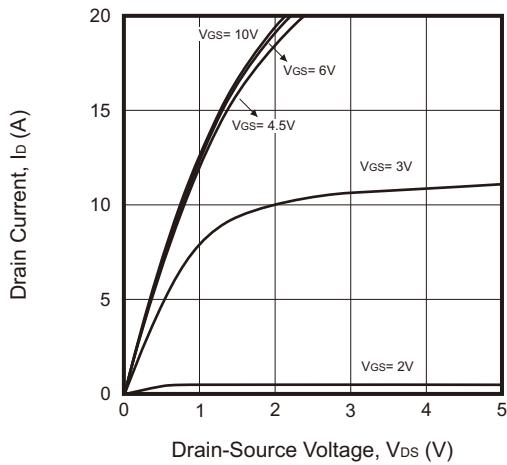


Fig.4 - Drain-Source on Resistance

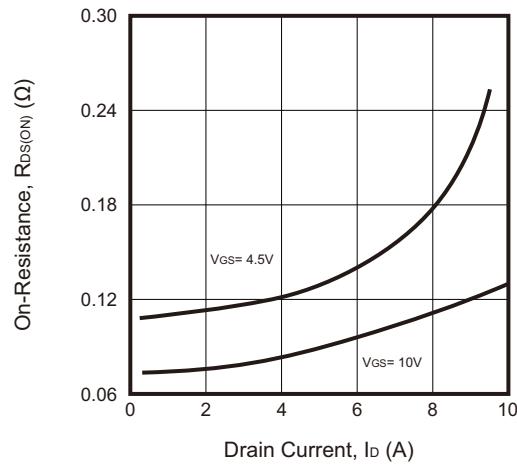


Fig.5 - Transfer Characteristics


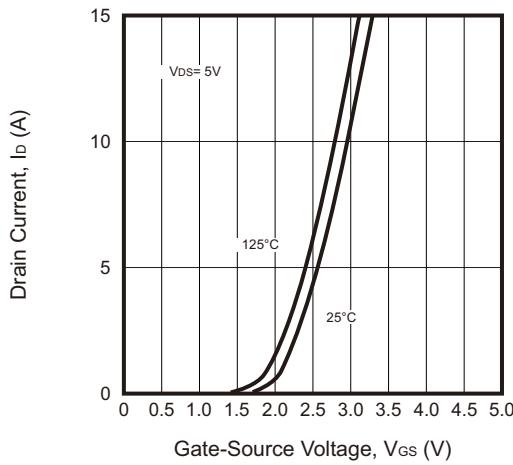


Fig.6 - Drain-Source on Resistance

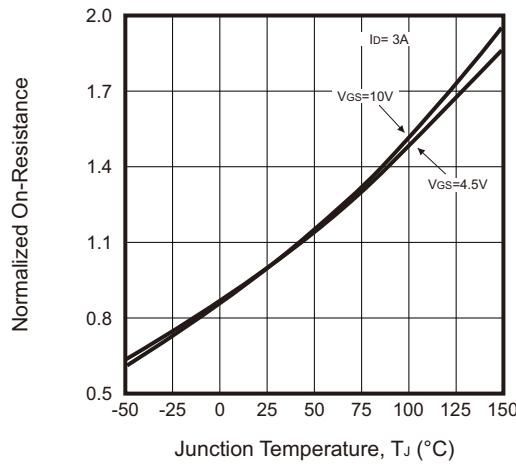

Company reserves the right to improve product design , functions and reliability without notice.

Rating and Characteristic Curves (CMS03N06T-HF)

Fig.7 - $R_{DS(ON)}$ vs V_{GS}

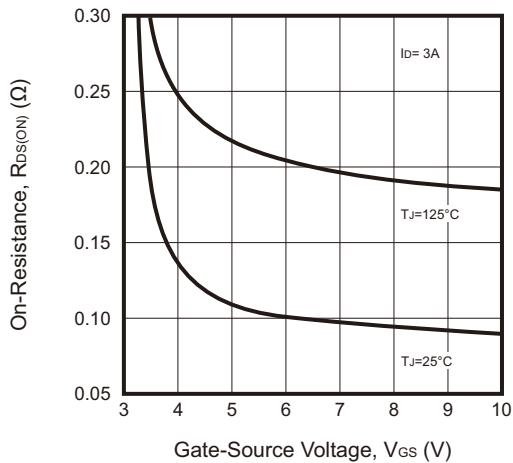


Fig.8 - Capacitance vs V_{DS}

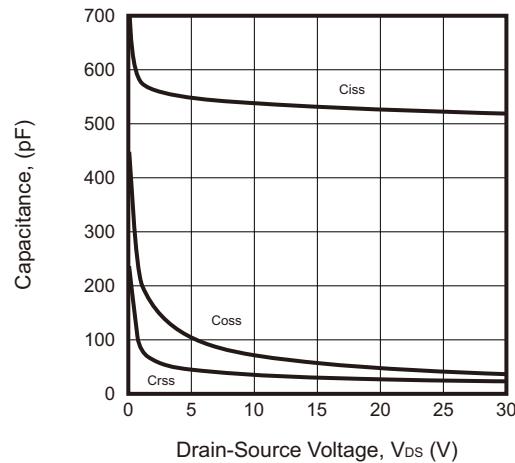


Fig.9 - Gate Charge

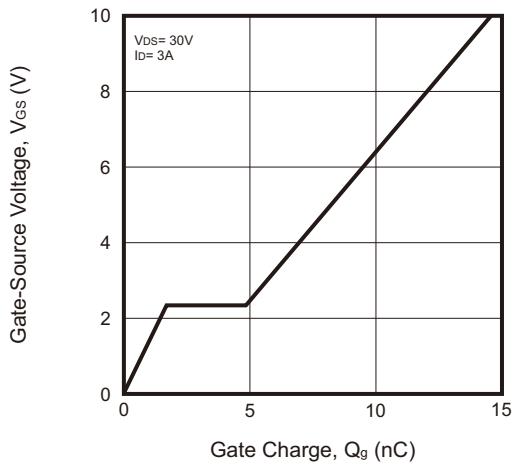


Fig.10 - Source-Drain Diode Forward



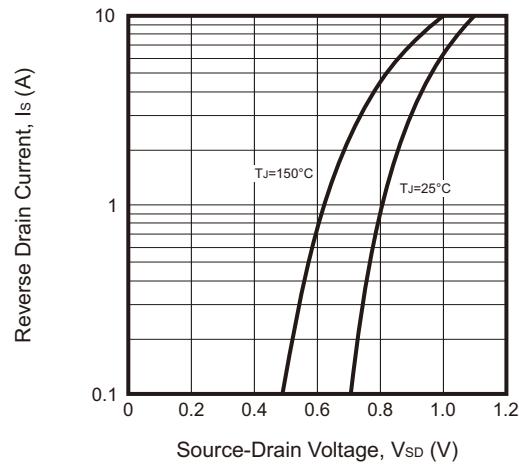


Fig.11 - Safe Operation Area

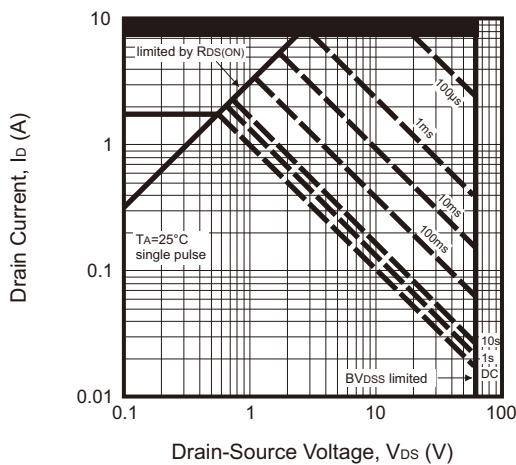

Company reserves the right to improve product design , functions and reliability without notice.

Reel Taping Specification

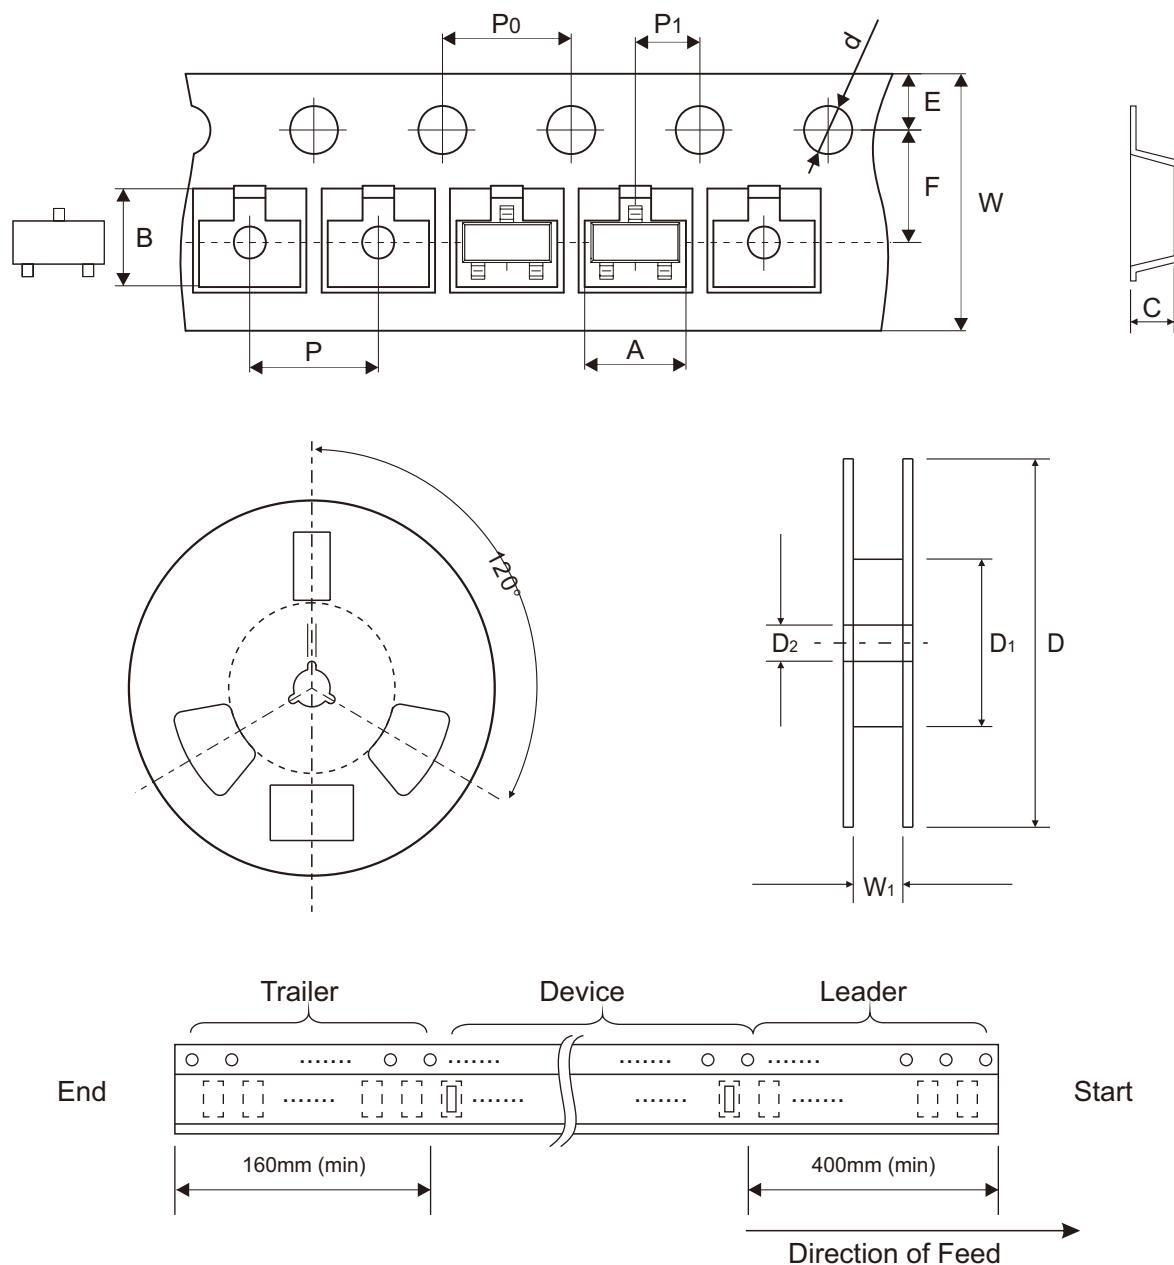

SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	$1.50 + 0.10$ $- 0.00$	178.00 ± 2.00	50.00 ± 0.50	13.00 ± 0.25
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	$0.059 + 0.004$ $- 0.000$	7.008 ± 0.079	1.969 ± 0.020	0.512 ± 0.010


SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	$8.00 + 0.30$ $- 0.10$	9.50 ± 1.50
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	$0.315 + 0.012$ $- 0.004$	0.374 ± 0.059

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

Marking Code


Part Number	Marking Code
CMS03N06T-HF	6003 X



X = Control code

Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	0.95	0.037
D	2.00	0.079
E	2.90	0.114

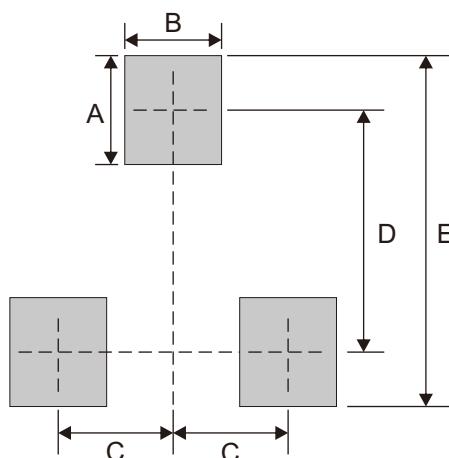

Note: 1. The pad layout is for reference purposes only.

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7