



**REMOVABLE CONTACT**

**PACKAGING PER 100**


**R280.473.100**

Series :  
**ACCESSOIRE**

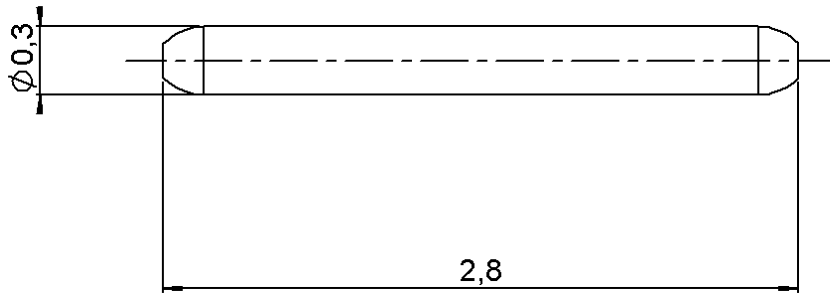

—  
SCALE : 1/1

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	-	-
CENTER CONTACT	DILVER P1	.GOLD 1.3 OVER NICKEL 2
OUTER CONTACT	-	-
INSULATOR	-	-
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0741 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary



**REMOVABLE CONTACT**

**PACKAGING PER 100**

**R280.473.100**

Series :  
**ACCESSOIRE**

**PACKAGING**

Standard	Unit	Other
	<b>'W' option</b>	<b>Contact us</b>

**SPECIFICATION**

**CABLE ASSEMBLY**

Stripping mm	a	b	c	d	e	f

**ELECTRICAL CHARACTERISTICS**

Impedance		$\Omega$
Frequency		GHz
VSWR	+	x F(GHz) Maxi
Insertion loss		$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (	-F(GHz)) dB Maxi
Voltage rating		Veff Maxi
Dielectric withstanding voltage		Veff mini
Insulation resistance		M $\Omega$ mini

Assembly instruction :

Recommended cable(s)

**MECHANICAL CHARACTERISTICS**

Recommended torque		
Panel nut		N.cm
Clamp nut		N.cm
A/F clamp nut		mm
Mating life		Cycles mini
Weight	<b>0,0016</b>	g

Cable retention

- pull off

N mini

- torque

N.cm

**TOOLING**

Part Number	Description	Hexagon
.	.	.

**OTHER CHARACTERISTICS**

**ENVIRONMENTAL**

Operating temperature	<b>-65/+165</b>	$^{\circ}$ C
Panel leakage		

Issue : 0741 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary



**RADIALL**®