



2 W

DC- 8 GHz


BNC

COAXIAL ATTENUATOR

issue  
30.aug.95

Page  
1 / 1

**DRAWING**

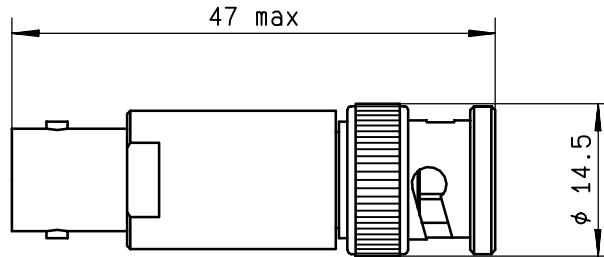

General tolerances: +/- 0.5 mm

**R F CHARACTERISTICS**

FREQUENCY RANGE : DC - 8 GHz  
 IMPEDANCE : 50 Ohms  
 ATTENUATION - NOMINAL : 13 dB

FREQUENCY	DC- 4 GHz	4 - 8 GHz
V.S.W.R	<= 1.20	<= 1.25
DEVIATION (dB)	+0.3 / -0.3	+0.5 / -0.5


TEMPERATURE SENSITIVITY :  $4 \times 10^{-4} \frac{\text{dB}}{\text{dB} \cdot ^\circ\text{C}}$   
 PEAK POWER at 25°C (1µs,1%) : 100 W  
 AVERAGE POWER at 25°C : 2 W

**MECHANICAL CHARACTERISTICS**

CONNECTORS : BNC male/female per MIL-C 39012  
 WEIGHT : < 30 g

**ENVIRONMENTAL CHARACTERISTICS**

OPERATING TEMPERATURE RANGE (°C) : -55 , +125  
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

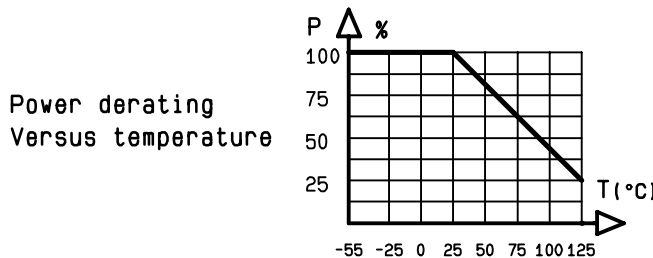

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9212

CREATION					
N° :					
PEN/EP:CAT					
Name:AF					
Date:30.aug.95					
APP.:VE					
ISSUE		REVISIONS		NAME	APPR.

**RADIALL®**  
 101. rue P. Hoffmann -Z.I Ouest-  
 93116 ROSNY/BOIS Cedex-FRANCE  
 Phone:33(1)49353535  
 Fax :33(1)48546363  
 Twx RADIA 235220F