

## SUMMARY

### # Wires

Triax 1



*Image is for illustrative purpose only*

Series 4M  
Termination type Female crimp triaxial  
IP rating 66 mated (mating interface)  
AWG wire size 0.00 - 0.00  
Cable Ø 0.00 - 0.00 mm  
Status **Obsolete**

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model RMA\*: Straight coupler  
Keying 1 key (alpha=0; plug: male contacts, receptacle: female contacts)  
Housing Material Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces  
Weight 146.33 g

### Performance

Configuration 4M.675 : 1 Triax (75 Ohm)  
Insulator T: PTFE  
Rated Current 15 Amps

### Specifications

Vtest: 1500 V (AC), 2120 V (DC)  
Impedance: 75 Ohm


### Others

Humidity (max): <=95% [at 60 deg C / 140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

Climatical Category: 55/175/21  
Shielding (min): 85 dB (10 MHz)  
Salt Spray Corrosion: >1000 hr

## DRAWINGS

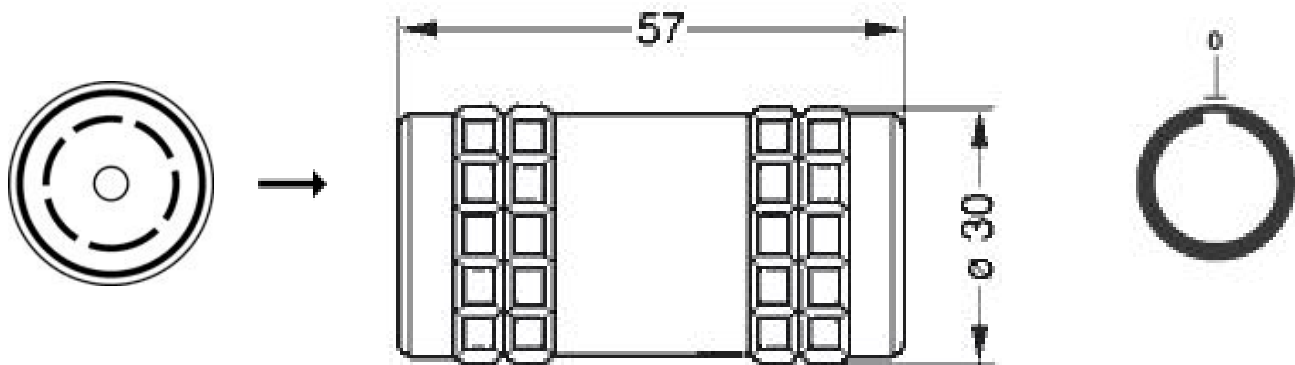

### Dimensions

	A	L
mm.	30	57
in.	1,18	2,24

## RECOMMENDED BY LEMO

### Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.