

RT3215-32.768-6-TR-10PPM


● **SPECIFICATIONS**

PARAMETER	VALUE
FREQUENCY RANGE	32.768 kHz
FREQUENCY TOLERANCE AT 25°C	±10 ppm max
TURNOVER TEMPERATURE	+25 ±5°C
TEMPERATURE COEFFICIENT	-0.04 x 10 ⁻⁶ / °C ²
SHUNT CAPACITANCE	1.1 pF typ
LOAD CAPACITANCE	6 pF
EQUIVALENT SERIES RESISTANCE	70 kΩ max
DRIVE LEVEL	0.5 μW max
AGING	±3 ppm first year max
OPERATING TEMPERATURE RANGE	-40°C to +85°C
STORAGE TEMPERATURE RANGE	-55°C to +125°C




Photo is not actual part

● **MECHANICAL SPECIFICATION**

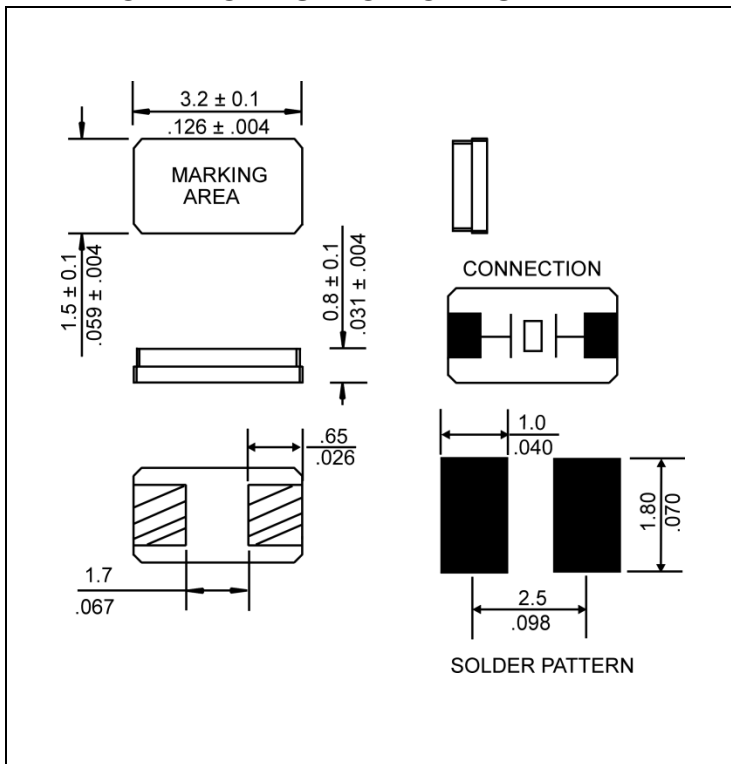

● **CARRIER TAPE DIMENSIONS**

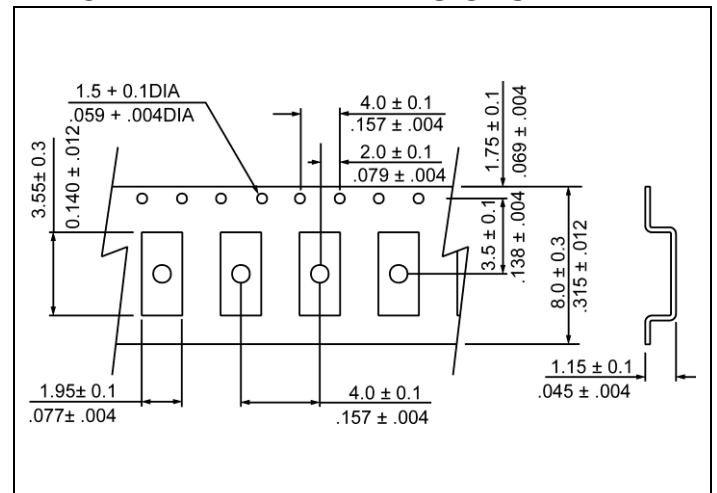


NOTE: REFER TO EIA-481 FOR DIMENSIONS

● **PACKAGING**

330 mm REEL DIAMETER
 8 mm TAPE WIDTH, 4 mm PITCH
 QUANTITY: 3000 PIECES PER REEL
 IN ACCORDANCE WITH EIA-481

● REFLOW PROFILE

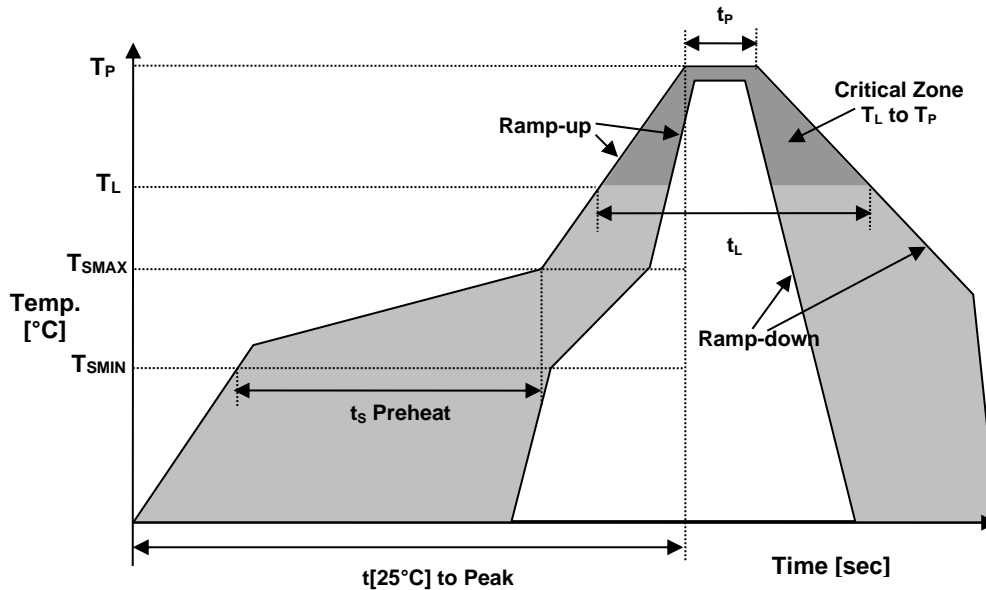

Reflow profile		
Temperature Min Preheat	T_{SMIN}	125°C
Temperature Max Preheat	T_{SMAX}	150°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_p	10 sec.
Time $t_{[25^\circ\text{C}]}$ to Peak Temperature	$t_{[25^\circ\text{C}]}$ to Peak	480 sec.
Time	t_L	60-150 sec.

● ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	Compliant
REACH SVHC	Compliant
HALOGEN-FREE	Compliant
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Au



● MARKING

Xywwx

X – Internal Production ID code (J, R, T, Y, M, R, N)
 y – Year code
 ww – Week code
 x – 1 or 2 digits as Lot code

ymxxx

y – Year code
 m – Month code, Jan ~ Sep: 1 ~ 9, Oct: X Nov: Y Dec: Z
 xxx – Lot code

XLzymb

X – Internal Production ID code (J, R, T, Y, M, R, N)
 L – Load capacitance code (A: 12.5pF B: 9pF C: 7pF Z: others)
 z – Lot code
 y – Year code
 m – Month code, Jan ~ Sep: 1 ~ 9, Oct: X Nov: Y Dec: Z
 d – Day code

XzymF_{xx}

X – Internal Production ID code (J, R, T, Y, M, R, N)
 z – Frequency code
 y – Year code
 m – Month code, Jan ~ Sep: 1 ~ 9, Oct: X Nov: Y Dec: Z
_{xx} – Lot code

● APPROVAL

Drawn By:	LP, July 21, 2017
Approved By:	JL, July 21, 2017
Revision:	A, Initial Release B, CP, November 24, 2020 Updated to the current spec levels