


Ring Terminals

Material: Tin Plated Brass


Temperature: 300°F

Maximum Electrical Rating: 22 - 3 Amps, 20 - 4 Amps, 18 - 7 Amps, 16 - 10 Amps, 14 - 15 Amps, 12 - 20 Amps, 10 - 24 Amps

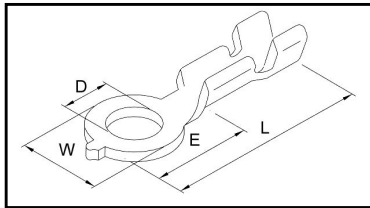

Double Crimp Ring

Single Crimp Ring

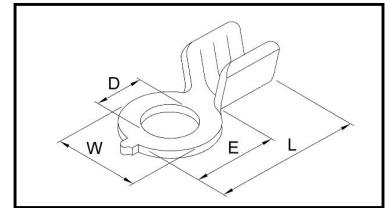

HOFFMAN PART NO.	*CRIMP TYPE	WIRE SIZE	STUD SIZE	DIMENSION (INCHES)				UL	REEL QTY
				STUD DIAMETER D	TONGUE WIDTH W	STUD CLEARANCE E	LENGTH L		
2216DM5ST	D	22-16	10	0.200	0.303	0.364	0.665	N	5000
2216D5ST	D	22-16	10	0.200	0.330	0.440	0.748	N	5000
2216M5ST	D	22-16	10	0.212	0.330	0.440	0.748	Y	5000
2216DL5ST	D	22-16	10	0.212	0.330	0.440	0.748	N	5000
22165ST	D	22-16	10	0.212	0.393	0.515	0.818	Y	5000
22166ST	D	22-16	1/4	0.251	0.393	0.511	0.818	Y	5000
22168ST	D	22-16	5/16	0.334	0.543	0.708	1.023	Y	2500
2216S9ST	D	22-16	3/8	0.393	0.543	0.708	1.023	Y	2500
22169ST	D	22-16	3/8	0.393	0.629	0.787	1.059	Y	2500
2216D9ST	D	22-16	3/8	0.393	0.625	0.783	1.129	N	2500
2216DS11ST	D	22-16	7/16	0.444	0.629	0.787	1.062	N	3000
2216D11ST	D	22-16	7/16	0.472	0.629	0.787	1.062	N	3000
2216D13ST	D	22-16	1/2	0.511	0.625	0.783	1.129	N	3000
26202ST	D	20-16	3	0.126	0.196	0.220	0.417	N	10000
2016DS2ST	D	20-16	3	0.098	0.196	0.224	0.425	N	20000
2016DM3ST	D	20-16	5	0.126	0.200	0.220	0.417	Y	20000
2016D3ST	D	20-16	5	0.126	0.200	0.220	0.417	N	5000
2016D4ST	D	20-16	8	0.169	0.393	0.511	0.818	Y	5000
2016D5ST	D	20-16	10	0.212	0.472	0.586	0.885	N	3000
2016DM6ST	D	20-16	1/4	0.251	0.393	0.452	0.748	N	5000
2016D6ST	D	20-16	1/4	0.255	0.472	0.574	0.885	N	4000
2014D9ST	S	2014	3/8	0.393	0.629	0.217	0.905	N	3500
201411ST	S	20-14	7/16	0.440	0.629	0.217	0.905	Y	3500
2014DS13ST	S	20-14	1/2	0.511	0.629	0.217	0.905	N	3500
2014D13ST	S	20-14	1/2	0.527	0.629	0.217	0.905	N	3500
2018D13ST	D	20-18	1/2	0.511	0.629	0.528	1.055	N	3000
18144ST	D	18-14	8	0.164	0.330	0.440	0.748	N	5000
18144ST1	S	18-14	8	0.169	0.275	0.362	0.519	N	10000
18145ST	D	18-14	10	0.212	0.330	0.440	0.748	N	5000
16125ST	D	16-12	10	0.196	0.342	0.444	0.854	N	3000
14105ST	D	16-10	10	0.197	0.456	0.606	0.968	N	2000
1610D8ST	D	16-10	5/16	0.334	0.456	0.606	0.968	N	2000
1610D11ST	D	16-10	7/16	0.456	0.456	0.606	0.968	N	2000
106D5ST	D	10-6	10	0.200	0.472	0.629	1.003	N	1000

* D = Double Crimp, S = Single Crimp

