
### S40F2C-P02LJG0-450S

# series\_f, type\_s4



### **General information**

Part number	S40F2C-P02LJG0-450S	
Termination	solder	
Size	0	
Locking principle	push	
Coding	2_halfshell	
Cable Diameter	cable_mini_45	
Cable outlet	bend_relief	

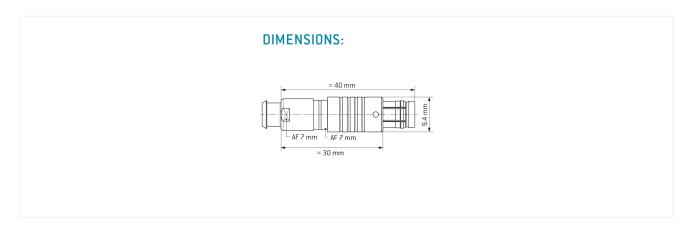

## Contact insert description

Number of contacts	2
Contact type	sockets
Contact diameter	09mm
Insulator material	peek
Wire cross section	22_awg
Termination	solder
Termination diameter	085mm

reverse\_gender\_on\_request

### **Technical information**

Max. creepage and air clearance distance	10_mm	08 <sub>_</sub> mm
Nominal current single contact	075_a	iec_60512_5_2
Nominal current insert	7.5 A	vde_0298_4
Test voltage	15_kv_ac	sae_13441
safety_text		

### Mechanical and environmental data

Degree of protection*	ip68
Operating temperature	40_120_c
Mating cycles	5000

mated

### Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety\_text\_2 ul\_text illustrative\_text