

# PCB Relay with forcibly guided contacts 8 A



Hoists and cranes



Escalators



Medical and dentistry



Hospitals



Carousel warehouses





Elevators and lifts



Disabled lift



Wood-processing machines





**PCB Relay with forcibly guided contacts according to EN 61810-3 (previously EN 50205)**

**Type B  
2 CO contacts\***

**Type 50.12...1000**

- 2 pole 8 A
- Contact AgNi

**Type 50.12...5000**

- 2 pole 8 A
- Contact AgNi + Au

- High physical separation between adjacent contacts
- Cadmium Free contact materials
- 8 mm, 6 kV (1.2/50 μs) isolation, coil-contacts
- Flux proof: RT II

**50.12...1000**



- For medium duty switching, suggested for DC loads
- 2 pole 8 A
- 5 mm pinning
- PCB mounting

**50.12...5000**





- For safety applications
- Gold plate contacts for low level switching capability
- 5 mm pinning
- PCB mounting

\* According to EN 61810-3 only 1 NO and 1 NC (11-14 and 21-22 or 11-12 and 21-24) shall be used as forcibly guided contacts.



FOR UL RATINGS SEE:

"General technical information" page V

For outline drawing see page 7



Copper side view



Copper side view

**Contact specification**

|   |           |             |             |
|---|-----------|-------------|-------------|
| Contact configuration                       |           | 2 CO (DPDT) | 2 CO (DPDT) |
| Rated current/Maximum peak current          | A         | 8/15        | 8/15        |
| Rated voltage/<br>Maximum switching voltage | V AC      | 250/400     | 250/400     |
| Rated load AC1                              | VA        | 2000        | 2000        |
| Rated load AC15 (230 V AC)                  | VA        | 500         | 500         |
| Single phase motor rating (230 V AC)        | kW        | 0.37        | 0.37        |
| Breaking capacity DC1: 24/110/220 V         | A         | 8/0.65/0.2  | 8/0.65/0.2  |
| Minimum switching load                      | mW (V/mA) | 500 (10/10) | 50 (5/5)    |
| Standard contact material                   |           | AgNi        | AgNi + Au   |

**Coil specification**

|                                   |                 |                                       |                                       |
|-----------------------------------|-----------------|---------------------------------------|---------------------------------------|
| Nominal voltage (U <sub>N</sub> ) | V AC (50/60 Hz) | —                                     | —                                     |
|                                   | V DC            | 5 - 6 - 12 - 24 - 48 - 60 - 110 - 125 | 5 - 6 - 12 - 24 - 48 - 60 - 110 - 125 |
| Rated power AC/DC                 | VA (50 Hz)/W    | —/0.7                                 | —/0.7                                 |
| Operating range                   | AC (50 Hz)      | —                                     | —                                     |
|                                   | DC              | (0.75...1.2)U <sub>N</sub>            | (0.75...1.2)U <sub>N</sub>            |
| Holding voltage                   | AC/DC           | —/0.4 U <sub>N</sub>                  | —/0.4 U <sub>N</sub>                  |
| Must drop-out voltage             | AC/DC           | —/0.1 U <sub>N</sub>                  | —/0.1 U <sub>N</sub>                  |

**Technical data**

|  |        |                        |                        |
|--|--------|------------------------|------------------------|
| Mechanical life AC/DC                            | cycles | —/10 · 10 <sup>6</sup> | —/10 · 10 <sup>6</sup> |
| Electrical life at rated load AC1                | cycles | 100 · 10 <sup>3</sup>  | 100 · 10 <sup>3</sup>  |
| Operate/release time                             | ms     | 10/4                   | 10/4                   |
| Insulation between coil and contacts (1.2/50 μs) | kV     | 6 (8 mm)               | 6 (8 mm)               |
| Dielectric strength between open contacts        | V AC   | 1500                   | 1500                   |
| Ambient temperature range                        | °C     | −40...+70              | −40...+70              |
| Environmental protection                         |        | RT II                  | RT II                  |

**Approvals** (according to type)



**PCB Relay with forcibly guided contacts according to EN 61810 (previously EN 50205) Type A**

**Type 50.14...4220/4310**

- 4 pole 8 A (2 NO + 2 NC) or (3 NO + 1 NC)
- Contact AgSnO<sub>2</sub>

**Type 50.16...5420/5510/5330**


- 6 pole 8 A (4 NO + 2 NC) or (5 NO + 1 NC) or (3 NO + 3 NC)
- Contact AgSnO<sub>2</sub> + Au

- High physical separation between adjacent contacts
- Cadmium Free contact materials
- DC coil 800 mW
- 8 mm, 6 kV (1.2/50 μs) isolation, coil-contacts
- PCB mounting
- Wash tight: RT III

**NEW 50.14**



- For safety applications
- 4 pole 8 A
- PCB mounting




Copper side view

**NEW 50.16**



- For safety applications
- 6 pole 8 A
- PCB mounting

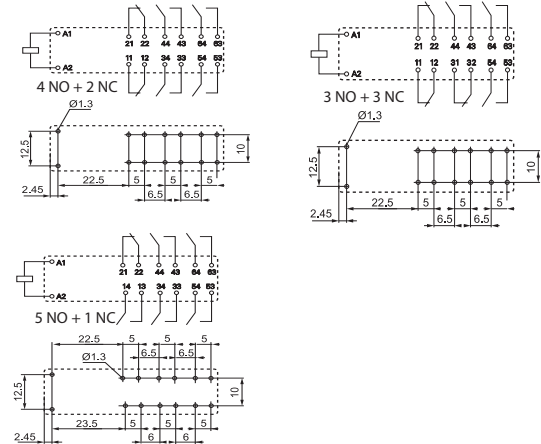

Copper side view

FOR UL RATINGS SEE:

"General technical information" page V

For outline drawing see page 7

**Contact specification**

|   |           |                          |                                       |
|---|-----------|--------------------------|---------------------------------------|
| Contact configuration                       |           | 2 NO + 2 NC, 3 NO + 1 NC | 4 NO + 2 NC, 5 NO + 1 NC, 3 NO + 3 NC |
| Rated current/Maximum peak current          | A         | 8/15                     | 8/15                                  |
| Rated voltage/<br>Maximum switching voltage | V AC      | 250/400                  | 250/400                               |
| Rated load AC1                              | VA        | 2000                     | 2000                                  |
| Rated load AC15 (230 V AC)                  | VA        | 700                      | 1100                                  |
| Single phase motor rating (230 V AC)        | kW        | 0.37                     | 0.37                                  |
| Breaking capacity DC1: 24/110/220 V         | A         | 8/0.6/0.2                | 8/0.6/0.2                             |
| Minimum switching load                      | mW (V/mA) | 50 (5/10)                | 50 (5/10)                             |
| Standard contact material                   |           | AgSnO <sub>2</sub>       | AgSnO <sub>2</sub> + Au               |

**Coil specification**

|                                   |                 |                            |                            |
|-----------------------------------|-----------------|----------------------------|----------------------------|
| Nominal voltage (U <sub>N</sub> ) | V AC (50/60 Hz) | —                          | —                          |
|                                   | V DC            | 12 - 24 - 48 - 110         | 12 - 24 - 48 - 110         |
| Rated power AC/DC                 | VA (50 Hz)/W    | —/0.8                      | —/0.8                      |
| Operating range                   | AC (50 Hz)      | —                          | —                          |
|                                   | DC              | (0.75...1.2)U <sub>N</sub> | (0.75...1.2)U <sub>N</sub> |
| Holding voltage                   | AC/DC           | —/0.4 U <sub>N</sub>       | —/0.4 U <sub>N</sub>       |
| Must drop-out voltage             | AC/DC           | —/0.1 U <sub>N</sub>       | —/0.1 U <sub>N</sub>       |

**Technical data**


|  |        |                        |                        |
|--|--------|------------------------|------------------------|
| Mechanical life AC/DC                            | cycles | —/10 · 10 <sup>6</sup> | —/10 · 10 <sup>6</sup> |
| Electrical life at rated load AC1                | cycles | 100 · 10 <sup>3</sup>  | 100 · 10 <sup>3</sup>  |
| Operate/release time                             | ms     | 10/4                   | 10/4                   |
| Insulation between coil and contacts (1.2/50 μs) | kV     | 6 (8 mm)               | 6 (8 mm)               |
| Dielectric strength between open contacts        | V AC   | 1500                   | 1500                   |
| Ambient temperature range                        | °C     | -40...+70              | -40...+70              |
| Environmental protection                         |        | RT III                 | RT III                 |

**Approvals** (according to type)



## Ordering information

Example: 50 series forcibly guided contacts, 2 CO (DPDT) 8 A contacts, 24 V DC coil.

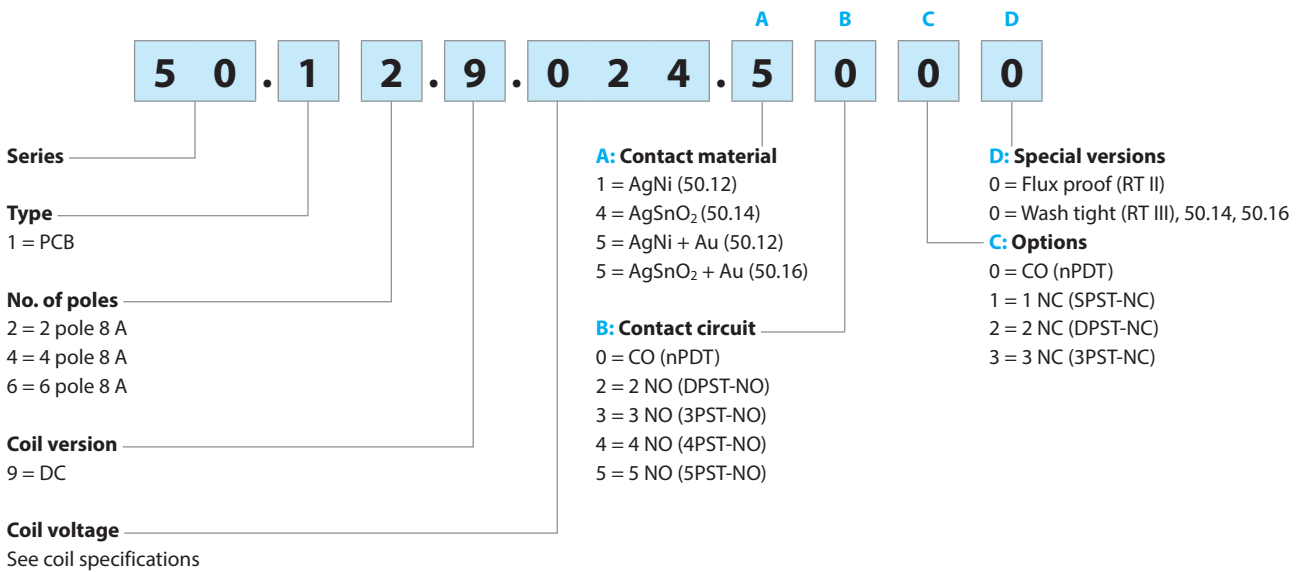


## Technical data


| Insulation according to EN 61810-1  |                         |                     |     |
|---|-------------------------|---------------------|-----|
| Nominal voltage of supply system  | V AC                    | 230/400             |     |
| Rated insulation voltage  | V AC                    | 250                 | 400 |
| Pollution degree  |                         | 3                   | 2   |
| Insulation between coil and contact set                                     |                         |                     |     |
| Type of insulation  |                         | Reinforced (8 mm)   |     |
| Overvoltage category  |                         | III                 |     |
| Rated impulse voltage   | kV (1.2/50 µs)          | 6                   |     |
| Dielectric strength   | V AC                    | 4000                |     |
| Insulation between adjacent contacts  |                         |                     |     |
| Type of insulation  |                         | Basic               |     |
| Overvoltage category  |                         | III                 |     |
| Rated impulse voltage   | kV (1.2/50 µs)          | 4                   |     |
| Dielectric strength (50.12, 50.16)  | V AC                    | 3000                |     |
| Dielectric strength (50.14)   | V AC                    | 2500                |     |
| Insulation between open contacts  |                         |                     |     |
| Type of disconnection   |                         | Micro-disconnection |     |
| Dielectric strength   | V AC/kV (1.2/50 µs)     | 1500/2.5            |     |
| Insulation between coil terminals   |                         |                     |     |
| Rated impulse voltage (surge) differential mode (according to EN 61000-4-5) | kV (1.2/50 µs)          | 2                   |     |
| Other data  |                         |                     |     |
| Bounce time: NO/NC  | ms                      | 2/10                |     |
| Vibration resistance (10...200)Hz: NO/NC                                    | g                       | 20/6                |     |
| Shock resistance NO/NC  | g                       | 20/5                |     |
| Power lost to the environment   | without contact current | W                   | 0.7 |
|   | with rated current      | W                   | 1.2 |
| Recommended distance between relays mounted on PCB                          | mm                      | ≥ 5                 |     |

### Contact specification


F 50 - Electrical life (AC) v contact current (type 50.12)

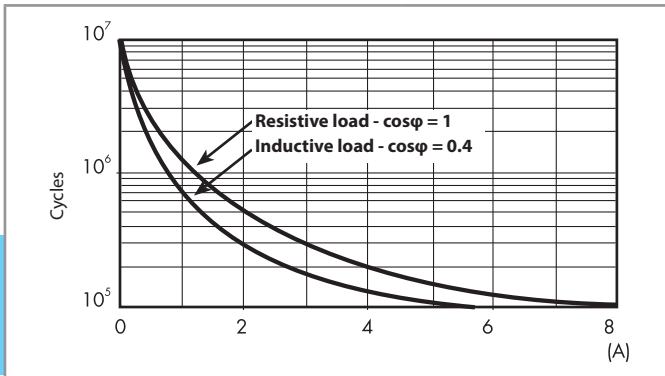

H 50 - Maximum DC1 breaking capacity (type 50.12)

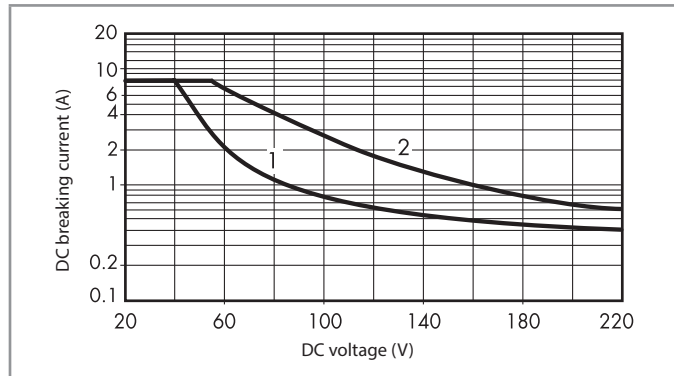

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of  $\geq 100 \cdot 10^3$  can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.  
Note: the release time for the load will be increased.

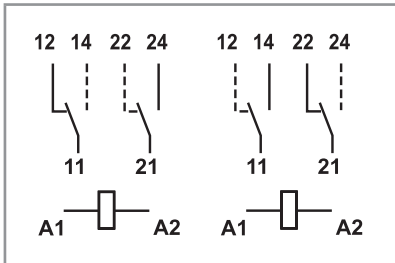


Alternative selection of NO and NC contacts to provide Forcibly guided (mechanically linked) contacts, in accordance with EN 61810-3 (type B).

### Coil specifications

DC coil data (type 50.12)

| Nominal voltage<br>$U_N$<br>V | Coil code | Operating range |                | Resistance<br>R<br>$\Omega$ | Rated coil consumption<br>I at $U_N$<br>mA |
|-------------------------------|-----------|-----------------|----------------|-----------------------------|--|
|                               |           | $U_{min}$<br>V  | $U_{max}$<br>V |                             |  |
| 5                             | 9.005     | 3.8             | 6              | 35                          | 143  |
| 6                             | 9.006     | 4.5             | 7.2            | 50                          | 120  |
| 12                            | 9.012     | 9               | 14.4           | 205                         | 58.5                                       |
| 24                            | 9.024     | 18              | 28.8           | 820                         | 29.3                                       |
| 48                            | 9.048     | 36              | 57.6           | 3280                        | 14.4                                       |
| 60                            | 9.060     | 45              | 72             | 5140                        | 11.7                                       |
| 110                           | 9.110     | 82.5            | 131            | 17250                       | 6.4  |
| 125                           | 9.125     | 93.7            | 150            | 22300                       | 5.6  |

R 50 - DC coil operating range v ambient temperature  
Standard coil (type 50.12)

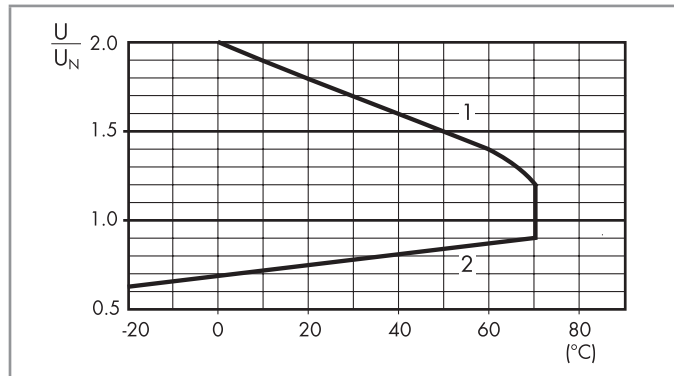


- 1 - Max. permitted coil voltage.
- 2 - Min. pick-up voltage with coil at ambient temperature.

DC coil data (type 50.14/16)


| Nominal voltage<br>$U_N$<br>V | Coil code | Operating range |                | Resistance<br>R<br>$\Omega$ | Rated coil consumption<br>I at $U_N$<br>mA |
|-------------------------------|-----------|-----------------|----------------|-----------------------------|--|
|                               |           | $U_{min}$<br>V  | $U_{max}$<br>V |                             |  |
| 12                            | 9.012     | 9               | 14.4           | 180                         | 66.6                                       |
| 24                            | 9.024     | 18              | 28.8           | 720                         | 33.3                                       |
| 48                            | 9.048     | 36              | 57.6           | 2880                        | 16.6                                       |
| 110                           | 9.110     | 82.5            | 131            | 15125                       | 7.7  |

## Contact specification

F 50 - Electrical life (AC) v contact current (type 50.14)

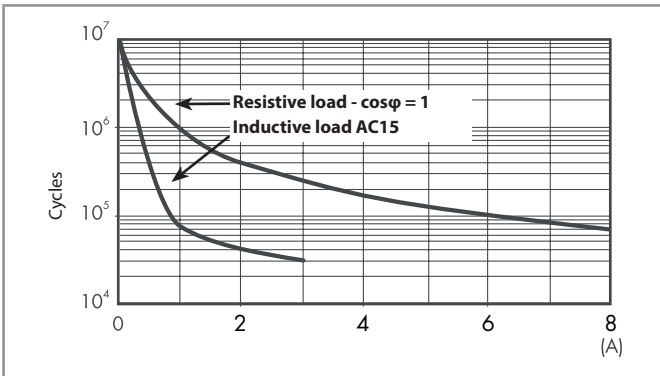


H 50 - Maximum DC1 breaking capacity (type 50.14)

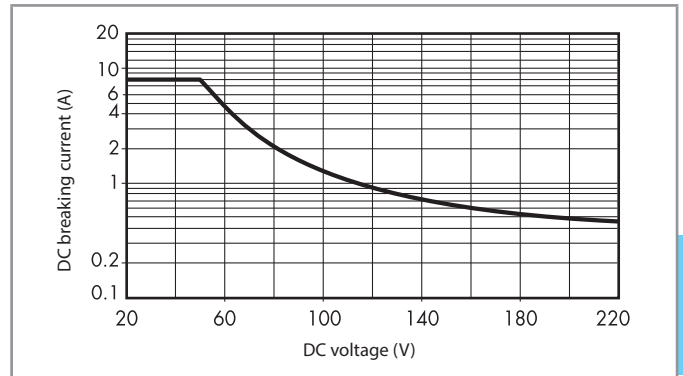


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of  $\geq 100 \cdot 10^3$  can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.  
Note: the release time for the load will be increased.

F 50 - Electrical life (AC) v contact current (type 50.16)

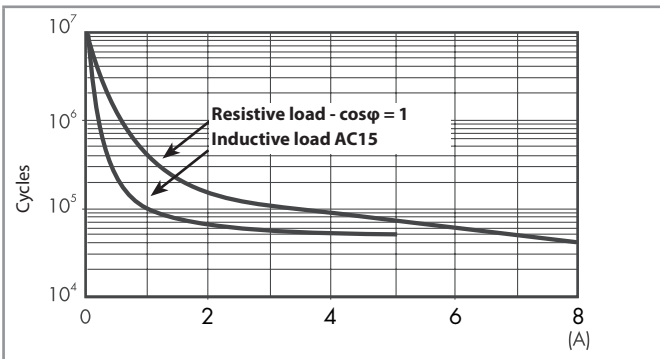


H 50 - Maximum DC1 breaking capacity (type 50.16)

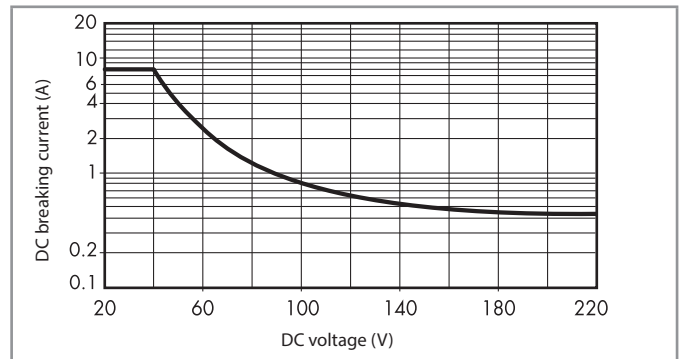


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of  $\geq 100 \cdot 10^3$  can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.  
Note: the release time for the load will be increased.

## Outline drawings

Types 50.12...1000/50.12...5000



Type 50.14



Type 50.16

