
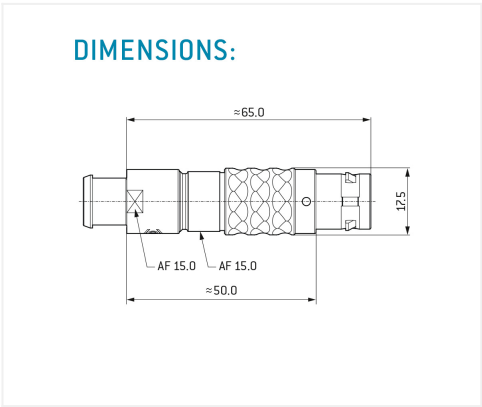
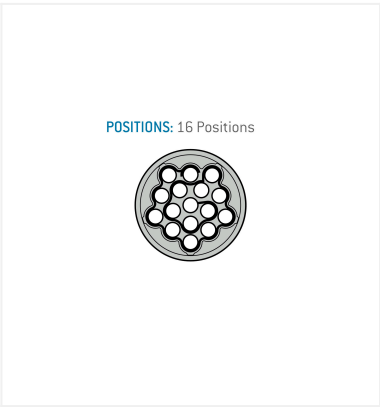
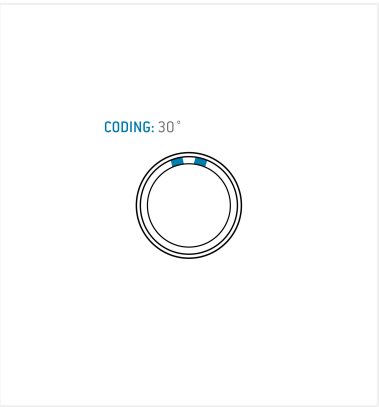


ODU MINI-SNAP® Series L Plug acc. IEC 60601-1

General information

|                        |                     |
|------------------------|---------------------|
| Part number            | SB3LAC-P16PFH2-020S |
| Termination            | Crimp               |
| Size                   | 3                   |
| Locking principle      | push                |
| Coding                 | a_key               |
| Cable Diameter         | cable_mini_02       |
| Cable outlet           | bend_relief         |
| customs tariff numbers | 85366990            |



Contact insert description

|                    |           |
|--------------------|-----------|
| Number of contacts | 16        |
| Contact type       | pins      |
| Contact diameter   | 07mm      |
| Insulator material | peek      |
| Wire cross section | 20-24_awg |
| Termination        | Crimp     |

Technical information

|                                          |          |                       |
|------------------------------------------|----------|-----------------------|
| Max. creepage and air clearance distance | 12_mm    | iec_60601_2mopp_2moop |
| Nominal current single contact           | 09_a     | iec_60512_5_2         |
| Nominal current insert                   | 4,5 A    | vde_0298_4            |
| Test voltage                             | 15_kv_ac | sae_13441             |

safety\_text  
iec\_60601\_plug

**Mechanical and environmental data**

|                       |          |
|-----------------------|----------|
| Degree of protection* | ip50     |
| Operating temperature | 40_120_c |
| Mating cycles         | 5000     |

mated\_unmated

**Material and surface treatments**

|         |               |
|---------|---------------|
| Housing | m_chrome      |
| Contact | cu_alloy_gold |

safety\_text\_2  
ul\_text  
illustrative\_text